

White Paper on Natural Gas Interchangeability and Non-Combustion End Use

NGC+ Interchangeability Work Group
February 28, 2005*

* Including appendices added to document June 7, 2004

FEDERAL ENERGY REGULATORY COMMISSION
RP04-249-001
FGT-6
12/6/05
12/6/05

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 2 of 250

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 3 of 250

1.0 Introduction

1.0.1 The Federal Energy Regulatory Commission (FERC) has undertaken an initiative to examine and update natural gas interchangeability standards. FERC's initiative results from the confluence of several events and issues. Liquefied natural gas (LNG) imports have begun to rise, and forecasts are for future imports to be a significant percentage of total North American supply. Regasification terminals have regained active status and are expanding. The National Petroleum Council's 2003 report "Balancing Natural Gas Policy – Fueling the Demands of a Growing Economy" presented projections for LNG imports to increase from 1 percent of our natural gas supply in 2003 to as much as 14 percent by 2025. This report also recommended that FERC and DOE "update natural gas interchangeability standards."¹ The characteristics of natural gas supply in North America have evolved over time as conventional sources are depleted, and new sources in the Rockies, Appalachians and the Gulf of Mexico are developed. Direct receipt of unprocessed gas by transmission pipelines has grown and also contributed to the change in the natural gas composition. Finally, the United States has also experienced prolonged periods of pricing economics that make it more profitable to leave some natural gas liquids (NGL's) in the natural gas stream as Btu's rather than process the gas and extract the NGL's for petrochemical feedstock and other traditional markets. These issues are exacerbated by North American natural gas supply being unable to meet current or projected demand.

1.0.2 The transition from historical gas compositions to the evolving gas supply profile presents specific technical challenges throughout the stakeholder value chain. Consequently, FERC undertook the challenge to begin addressing these issues in its annual Natural Gas Markets Conference (PL03-6-000) on October 14, 2003 and a technical conference on gas quality issues (PL04-3-000) on February 18, 2004. There are also several proceedings before FERC that highlight these issues on an individual basis. As part of their process, FERC recognizes and has encouraged the industry to develop a process to identify the issues in a comprehensive fashion and wherever possible, to recommend courses of action developed by consensus. A group of stakeholders, under the leadership of the Natural Gas Council, hereafter known as the NGC+, formed a technical work group to address the hydrocarbon liquid dropout issues specific to domestic supply and another technical work group to address the interchangeability issues associated with high Btu LNG imports.

1.0.3 Interchangeability is defined as:

The ability to substitute one gaseous fuel for another in a combustion application without materially changing operational safety, efficiency, performance or materially increasing air pollutant emissions.

Interchangeability is described in technically based quantitative measures, such as indices, that have demonstrated broad application to end-uses and can be applied without discrimination of either end-users or individual suppliers.

¹ Executive Summary, Page 64

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 4 of 250

2.0 Objective

2.1 The objective of this white paper is to define acceptable ranges of natural gas characteristics that can be consumed by end users while maintaining safety, reliability, and environmental performance.² It is important to recognize that this objective applies equally to imported LNG and domestic supply.

2.2 The NGC+ commissioned the Work Group on Interchangeability to examine the issues related to maintaining adequate and reliable gas supplies for consumers in a manner that will enable system integrity, operational reliability and environmental performance.

3.0 Background

3.1 Development of North American Natural Gas Industry

3.1.1 Interchangeability has been an issue since the 1930s and 1940s when natural gas began to replace manufactured gas (gas derived from coal and oil) in street lighting and other applications. In the traditional sense, gas interchangeability is simply defined as the ability to substitute one gaseous fuel for another without impacting combustion performance. However, the term interchangeability in the NGC+ effort has taken on a more general definition that includes the ability to substitute one gas for another without materially impacting historical utilization, including utilization in the industrial sector as "feedstock."

3.1.2 Interchangeability remained an issue throughout the twentieth century, but mostly on a regional basis as new domestic supplies became available. In the areas where the gas supply changed significantly with time or by region, gas utilities managed the interchangeability issues in various ways, including Btu stabilization (nitrogen or air blending) and appliance readjustment. In addition, several LDC's studied regional impacts of interchangeability extensively as new LNG imports containing varying levels of higher hydrocarbons were planned and/or introduced into the North American supply infrastructure. Now, interchangeability has risen as a national issue as more non-traditional domestic supplies coupled with increases in global LNG imports that are planned to play a more significant role in meeting demand.

3.2 Development of Natural Gas End Use

3.2.1 Natural gas and NGLs found a ready market in the burgeoning petrochemical industry that began its rapid growth as part of the war effort associated with WWII and accelerated even faster after 1952. The regional growth of the interstate pipeline system in the 1950's and 1960's coupled with relatively low cost natural gas encouraged the installation of gas burning equipment (furnaces, hot water heaters, stoves, etc.) in residential and

² Performance applies to material increases in air pollutants from gas-fired equipment that cannot be addressed cost effectively with additional emissions control technology.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 5 of 250

commercial settings. In general, gas-burning equipment from this period through the 1980s was designed to optimize combustion by creating near stoichiometric conditions, i.e., chemically equivalent amounts of air and natural gas.³ As a result, properly installed and maintained equipment from that period is tolerant of fluctuations in the underlying gas quality related to seasonal demand patterns. Generally, inter- or intrastate pipeline supply meets the majority of non-peak natural gas demand and is supplemented with storage and propane-air mixtures during the peak usage periods. A number of appliance studies from the 1920s to the 1980s evaluated the limits of interchangeability for a number of types of natural gas and other fuel gases.

3.3 Changes in Natural Gas Supply

3.3.1 There are limited historical data on the precise composition of natural gas during the period of rapid growth described above, but contaminants (water, inerts, etc) were clearly being controlled while the variability in hydrocarbon composition was not as well documented. Up until the late 1990's, the presence of a growing NGL market and relatively low cost supply had created a consistent incentive to maximize the removal of higher hydrocarbons from the domestic gas supply, particularly in the Gulf Coast and Mid-continent supply areas. Domestic gas supplies appeared to be bountiful, and the only stimulus needed to increase production were high pricing levels that resulted in more drilling. The 2001-2004 steep run-up in gas prices has indeed increased drilling, but the production from these new wells has not offset declines in the historic supply basins. Discovery and development of new supply basins is barely keeping pace with the decline of older existing supply basins. As regions like the Appalachian Basin, Rocky Mountains, and Canada began producing more substantial quantities of gas with their own specific gas composition, distinct variability in gas compositions between regions began to develop, and this situation is likely to persist and further evolve as supply continues to change. Most notable has been the increase in coal-seam production in the Rocky Mountains and Appalachian basin. This gas is composed almost entirely of methane and inerts (nitrogen and CO₂) that yields a heating value significantly lower than traditional domestic production.

3.3.2 Direct receipt of small amounts of unprocessed gas by transmission pipelines has historically contributed to the difference of delivered natural gas in certain areas and continues to be a practice.

3.3.4 Finally, with three of the four existing regasification terminals regaining active status (the fourth remains in service), LNG imports have begun to rise, and future imports are forecasted to account for a more significant percentage of total North American supply. The economics of LNG transportation are such that LNG marketers prefer to have the ability to purchase LNG from a wide range of supply sources, most of which contain almost no inerts (such as CO₂ and N₂) and more non-methane hydrocarbons, such as ethane, propane and butanes, than historical US supplies. Non-methane hydrocarbons have a higher energy density; that is to say, they contain more Btu's per cubic foot. Higher energy density results in a more efficient production, storage and transportation of LNG, thereby increasing

³ The design basis was generally done to provide for an excess of air to ensure for more complete combustion conditions.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 6 of 250

the overall capacity of the LNG supply chain. In addition, LNG is almost free of inerts (nitrogen and carbon dioxide) as those are removed in the process of boil off during transportation. As a consequence, the worldwide LNG market evolved as a high Btu marketplace, thus potentially placing North America at a competitive disadvantage relative to other existing and growing markets.

3.4 Changes in End Use Equipment

3.4.1 Combustion burner designs vary widely among end uses. In addition, burner system designs in some equipment, such as gas turbines, have been changed substantially since the early 1990s. The shift was initiated by and has been intensified by ever increasing requirements to reduce emissions and increase fuel efficiency. This shift impacts combustion equipment ranging from reciprocating engines and commercial space heating equipment to the newest combustion turbine technology in electric power generation. The new burner technology is often referred to as "lean premix combustion". Other low emission technologies are also being used in home appliances as states work to meet Clean Air Act requirements. The net effect of these new designs is a greater sensitivity to gas composition characteristics and less tolerance of fluctuations in gas composition after the equipment has been set for a specified quality of natural gas. Equipment using these new designs is becoming widespread and as older equipment is replaced over time, the new designs will become pervasive throughout a broad number of end user segments. If these burners become a common trend in residential and light commercial end user markets, change will occur over a relatively long time period; particularly in the residential segment, since tens of millions of households have one or more gas consuming appliance.

3.4.2 Varying natural gas composition beyond acceptable limits can have the following effects in combustion equipment:

- a. In appliances, it can result in soot formation, elevated levels of carbon monoxide and pollutant emissions, and yellow tipping. It can also shorten heat exchanger life, and cause nuisance shutdowns from extinguished pilots or tripping of safety switches.
- b. In reciprocating engines, it can result in engine knock, negatively affect engine performance and decreased parts life.
- c. In combustion turbines, it can result in an increase in emissions, reduced reliability/availability, and decreased parts life.
- d. In appliances, flame stability issues including lifting are also a concern.
- e. In industrial boilers, furnaces and heaters, it can result in degraded performance, damage to heat transfer equipment and noncompliance with emission requirements.

**White Paper on Natural Gas Interchangeability
And Non-Combustion End Use**

**Exhibit No. FGT-6
Page 7 of 250**

3.4.3 Varying gas compositions beyond acceptable limits can be problematic in non-combustion-related applications in which natural gas is used as a manufacturing feedstock or in peak shaving liquefaction plants, because historical gas compositions were used as the basis for process design and optimization of operating units. More specifically, domestic LNG peak shaving liquefaction plants will most likely require retrofits to continue operations utilizing regasified LNG as feedstock. Propane-air peak shaving operations will also likely require retrofits and/or additional controls to continue operations.

3.5 Changes in Natural Gas Transportation

3.5.1 Before the passage of FERC Order 636 in 1985, wholesale natural gas was purchased by LDCs from interstate natural gas pipelines that purchased and amalgamated the supply from producers. During this period the interstate pipeline companies managed quality of the delivered gas by blending. The quality specifications were incorporated into the gas purchase and sale contracts. In general, these gas quality specifications in purchase contracts were designed to allow the acceptance of a wide variation of gas supply in small increments to a large portfolio of supply gas that was already flowing. As a result, the overall quality level of the delivered gas stream did not reflect the extremes of the receipt purchase specifications.

Order 636 separated the gas transportation and ownership responsibilities, canceling those contracts, which then allowed suppliers, marketers and end users to purchase and ship their own gas on those pipelines. During this restructuring of the business systems, quality specifications for natural gas transported on the pipelines were incorporated in tariffs.

3.5.2 This restructuring of the interstate pipeline industry encouraged the building of competing pipelines into marketplaces and interconnects between pipelines, greatly increasing the probability of delivering natural gas to end use customers from different production basins and processing regimes. Further regulatory restructuring of the pipeline business has increasingly limited the operational capability of interstate pipelines to adjust the flow of the pipeline unless requested by the shippers.

4.0 Overview of Interchangeability Indices

4.0.1 A variety of calculation methods have been developed to define the interchangeability of fuel gases for traditional end use equipment including:

- Single index methods
- Multiple index methods

4.0.2 These methods are generally based on empirical parameters developed to fit the results of interchangeability experiments. The single index methods are based on energy input while the multiple index methods incorporate fundamental combustion phenomena. Science Applications, Inc., (SAI), published a comprehensive review of these and other

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 8 of 250

interchangeability techniques in 1981 under sponsorship of the former Gas Research Institute (GRI), "Catalogue of Existing Interchangeability Prediction Methods."⁴

4.0.3 A range of heating values⁵ is specified in many pipeline tariffs, however, heating value alone is not a sufficient indicator of the interchangeability of gases.

4.0.4 The most common single index parameter is the Wobbe Index sometimes referred to as the *Interchangeability Factor*. The definition of the Wobbe Number is based on the heating value and specific gravity of a gas, and it is related to the thermal input to a burner (Btu per hour). It should be noted that while Wobbe is an effective, easy to use screening tool for interchangeability, the industry historically recognizes that the Wobbe Number alone is also not sufficient to completely predict gas interchangeability because it does not adequately predict all combustion phenomena.

4.0.5 Multiple index methods date back to the late 1940's and include the AGA Bulletin 36 Indices and the Weaver Indices. The multiple index techniques have a history of widespread and satisfactory use in the industry; however, as empirical models, the multiple index methods also have limitations based on the burner designs and fuel gases tested in the development research. In general, the new gas supply, called "substitute gas" is evaluated for behavior of specific combustion phenomena, including flame lifting, flashback, yellow tipping and incomplete combustion, relative to an "adjustment gas" or the gas normally used in the past with properly adjusted equipment.

4.0.6 A great deal of research has been performed to develop and assess interchangeability indices. However this work is continuing as appliances and other end use combustion devices become more sophisticated to meet current efficiency and emission requirements. Access to some of these valuable data has not been possible because the research was performed on a proprietary basis. The most reliable method for assessing the interchangeability of a substitute gas is to examine performance of various combustion devices in the laboratory after initial adjustment to a reference gas. This is obviously time consuming and can be impractical. The alternative to extensive laboratory testing is the use of prediction methods such as those highlighted above. However, it must be recognized that all of these methods are empirical and as such, may be their application may be restricted to the combustion phenomena, fuel gases and burner types for which they were derived.

5.0 Effects of Changing Natural Gas Composition on End Use Equipment

5.0.1 The Work Group recognized the need to examine the effects of changing composition for each type of end use equipment and combustion technology. As described in section 3.4.1, there are older combustion technologies, current technologies and newer combustion technologies within each end use equipment category. The categories of equipment considered were

⁴ Performance Modeling Of Advanced Burner Systems- Catalogue Of Existing Interchangeability Methods, Final Report Phase II, GRI - 80/0021, 1980.

⁵ Higher heating value, also referred to as Gross Heating Value by ISO, traditionally measured in British Thermal Units (BTU).

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 9 of 250

- Appliances,
- Industrial boilers, furnaces and process heaters,
- Reciprocating engines including Natural Gas Vehicles
- Combustion turbines, and
- Non-combustion uses including LNG peak shaving liquefaction and chemical and consumer product manufacturing.

5.0.2 The effects of changing composition in combustion applications can be described by a set of combustion specific phenomena and emission characteristics. The combustion specific phenomena include:

- Auto-ignition (also referred to as “knock” in engine applications)
- Combustion dynamics (pressure fluctuations and vibration)
- Flashback
- Lifting
- Blowout
- Incomplete combustion (carbon monoxide production), and
- Yellow tipping.

The major emission characteristics considered were:

- Nitrogen oxides (NO_x),
- Unburned hydrocarbons, and
- Carbon monoxide, and
- The response of supplemental emission control technology.

5.0.3 The Work Group examined each of these effects and in general found that there is a good theoretical understanding of the onset and management of these effects. However, in general, there are limited documented operational data that can be used to relate these effects consistently and reliably to compositional limits in natural gas covering the range of end use applications considered.

5.0.4 The Work Group also found that historical composition of natural gas plays a key role in assessing and managing interchangeability of gas supplies. This is best exemplified when considering home appliances. These units are initially installed and placed into operation using the natural gas as received, in a given region or market area. Appliance performance degrades when the appliance is operated with gas that is not interchangeable with the gas used to tune the appliance when it was first installed. Although the safety certification of appliances ensures that they perform safely when operated well above and below their design firing rates, much of that margin has historically been used to accommodate fluctuations in air temperature and humidity that also affect appliance performance. Marginal, improperly tuned or maintained equipment, and some newer low emission appliances are not as tolerant to changes in gas composition. Thus, ensuring that

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 10 of 250

gas supplies are interchangeable with historical local supplies used to tune "legacy" equipment is an important consideration in addressing interchangeability.

5.0.5 In addition, it has been documented through field testing that a small but significant fraction of residential appliances are performing marginally or poorly on domestic natural gas due to improper installation or lack of maintenance. These units can be especially sensitive to natural gas composition changes.⁶

5.0.6 One of the major concerns of varying natural gas composition in reciprocating engines is engine knock. The anti-knock property of a natural gas fuel can be expressed as a methane number and is analogous to the octane rating of gasoline. In addition to the anti-knock quality, the operating performance of an engine on a low methane number fuel may be important. Low methane number is usually a result of the presence of high hydrocarbons in the fuel. In addition to the methane number, the Wobbe number is also an important parameter for gas engines as it determines both the power and equivalence ratio and changes that might result in poor operational and environmental performance.

5.0.7 Non-combustion end uses include feedstock applications in various chemical and manufacturing processes such as ammonia fertilizers, reforming, fuel cells and LNG peak shaving liquefaction plants. Varying feedstock gas compositions can also negatively impact the efficiency and even the safety of these processes. In general, specific process design requirements are specified around a relatively tight range of feedstock compositions.

5.0.8 Of particular concern is the impact to LDC peak shaving liquefaction operations as these facilities have evolved into a critical part of the supply infrastructure of some LDCs. There are a smaller number of peak shaving plants operated by transmission pipeline companies. Shifts in feedstock composition resulting from unprocessed domestic supplies include increased concentrations of heavy hydrocarbons (C_6+) that can freeze out and plug heat exchangers, significantly impacting the efficiency and reliability of the liquefaction process. In addition, feedstock containing high concentrations of C_2/C_3 fractions as well as nitrogen from Btu stabilized regasified LNG can also significantly impact the efficiency and reliability of plant operations. LNG peak shaving liquefaction plants in general do not have the internal capacity or an "outlet" for these non-methane components that are traditionally removed from the gas by the liquefaction process. Depending on the liquefaction process, excessive inert concentrations pose additional problems with LNG storage systems because of increased tank boil-off. In summary, changes in feedstock composition beyond the original plant may require many facilities to retrofit cold box components (heat exchangers and flash vessels) as well as tank storage system components (cold blowers), and these retrofits may be necessary to accommodate unprocessed domestic supplies and regasified LNG imports. The inability to effectively and efficiently re-fill peak shaving storage during off-peak periods due to liquefaction system constraints caused by varying feedstock compositions beyond design could significantly compromise the pipeline or LDC's ability to meet peak day/peak hour demands.

⁶ TIAX – Cove Point Summary & Commonwealth Studies

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 11 of 250

5.0.9 Additional LDC peak shaving concerns include the impact of higher hydrocarbon gases on propane-air peak shaving operations. As with the liquefaction plants, these facilities were designed with specific blending capabilities and limitations based on historical pipeline gas compositions. Existing systems may not have the necessary capacity to adequately blend peak shaving supplies with higher hydrocarbon pipeline supplies while maintaining interchangeability criteria. As a result, retrofit of these facilities may also be required to accommodate variations in pipeline supply compositions.

5.0.10 The rate of change in gas composition appears to be an important parameter for some end uses. Fluctuations in composition beyond the limits that the equipment was tuned to receive, particularly if the changes occur over a short period of time, are likely to reduce the ability of some equipment to perform as designed by the manufacturer.

6.0 Application of Interchangeability Parameters

6.0.1 The Work Group considered the range of effects above and sought to define an approach to apply interchangeability parameters that addressed the full range of effects and that could ultimately achieve the objective, that is, to *"Define acceptable ranges of natural gas that can be consumed by end users while maintaining safety, reliability, and environmental performance."*

6.0.2 For traditional end use equipment, evaluation of acceptable gas quality variations begins with the actual adjustment gas. The actual adjustment gas is the first gas that is supplied to an appliance, that is, the gas used during the moments of appliance installation to adjust the equipment and set it "on rate." This concept is, of course, the basis for both single and multiple index calculations methods, which define mathematical indices based on a specified "Adjustment Gas" with known properties such as heating value and specific gravity and/or composition. In practice, development of the adjustment gas composition must be based on the history of gas supplies to the region and on the operations of the utility. Three situations may pertain:

- 1) The actual adjustment gas is identical to a consistent and known historical average gas. In this case, the delivered gas composition has been constant over long periods of time, and all appliances in the region have been installed with the same actual adjustment gas. This situation is experienced by those regions, such as parts of the Northeast and Midwest, which have historically received consistently processed pipeline supplies from producing regions such as the Gulf Coast and Mid-Continent supplies.
- 2) The utility establishes a specified or "target" gas based on the historical gas supplies. In this situation, the company effectively targets a single heating value and possibly other specifications (e.g., Wobbe, gas composition, orifice sizing tables) and provides these values to the installers of gas appliances, municipal building departments, gas suppliers, system operators, etc. The company may develop different target values for different zones or districts within its delivery system, depending on the gas source, the history of the gas supply, and other factors, such as elevation. This specification is currently used by companies that have managed interchangeability issues, such as companies that distribute gas at high altitudes, that have completed appliance readjustment programs within their system, or that use Btu stabilization for

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 12 of 250

interchangeability control. The utility typically monitors and provides necessary information to installers upon request to ensure the adjustment gas at the time of appliance installation is consistent with the stated target gas values.

- 3) There is no specified target value, and the composition of the delivered gas has varied over time. In this case, there is no single actual adjustment gas that can be defined for the delivery system, and the appliances within the system may have different and possibly unknown set points, depending on the variability of the gas supply. If evaluation of interchangeability is required, an estimate for the adjustment gas will be necessary. Alternatives may include the average historical composition, the minimum or maximum extremes, or a combination. This situation may exist in producing regions where the degree of gas processing may vary depending upon where the supply is obtained relative to processing facilities and to the extent contractual blending is available.


6.0.3 The Work Group drew upon the European experience and adopted the concept of developing an operating regime to define the acceptable limits. This approach entails selecting parameters that address the end use effects described above, such as auto-ignition, incomplete combustion, yellow tipping, lifting, and others. Indices such as those found in AGA Bulletin 36 and Weaver target specific end use effects while the Wobbe number is a more generic metric. For example, both the AGA Bulletin 36 and Weaver methods define indices to specifically address yellow tipping phenomena.

6.0.4 A purely scientific approach might lead one to applying many of the Weaver and AGA Bulletin 36 indices for every end use application. However, limited testing data on low emission combustion equipment indicate that these indices may not consistently account for the observed combustion related behavior. In addition, the Work Group was concerned about specifying overly restrictive limits and sought to define a more practical approach. The group built upon the idea of developing an operating regime.

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 13 of 250

**Figure 1. INTERCHANGEABILITY
 OPERATING REGIME**

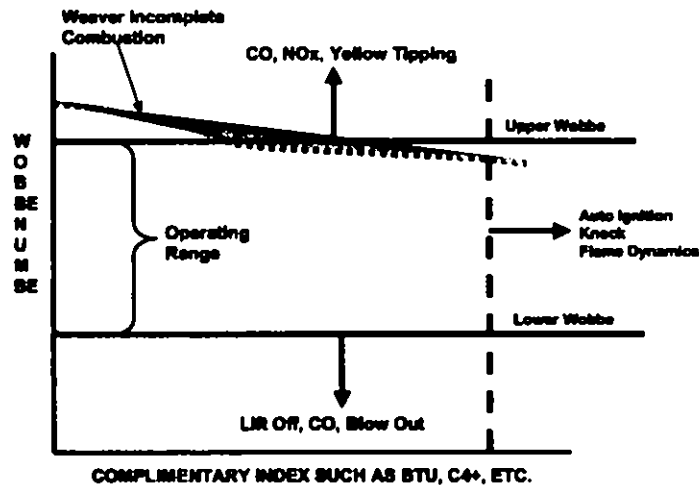

6.0.5 As shown in Figure 1, the basis for constructing the operating regime was to propose a parameter and identify which end use effects were addressed by that parameter, either in specifying a minimum or a maximum limit. The Wobbe Number was considered first because it was recognized as the most robust single parameter. In general, establishing a maximum Wobbe Number can address certain combustion phenomena such as yellow tipping, incomplete combustion and potential for increased emissions of NO_x and CO. Establishing a minimum Wobbe Number can be used to address lifting, blowout and CO. Laboratory testing and combustion theory has shown that simply selecting a maximum Wobbe is not sufficient to address incomplete combustion over a range of gas compositions (especially for natural gas with heating values in excess of about 1,100 Btu/scf. However, this limitation can be overcome by selecting a more conservative maximum Wobbe Number coupled with an additional parameter such as heating value.

6.0.6 The "art" is in selecting additional parameters to address the remaining end use effects. Experience has shown that specifying a maximum Heating Value can address auto-ignition (or knock), flashback, combustion dynamics, and when coupled with the Wobbe Number, incomplete combustion and sooting. Alternatively, the Work Group found that a maximum value for a specified fraction of hydrocarbons, such as butanes plus can address these same parameters.

7.0 Options for Managing Interchangeability

7.0.1 There are three options for managing interchangeability:

- Management at the production source
- Management prior to introduction into the transmission pipeline system, and

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 14 of 250

- Management at the point of end use

Each of these options is described below and placed in context with the existing infrastructure.

7.1 Management at the Production Source

7.1.1 Natural gas interchangeability can be managed near the source of production. For domestic supply, this generally entails treating and processing gas to reduce concentrations of inerts, contaminants such as corrosive compounds and hydrocarbons other than methane. Gas is treated to reduce inerts and corrosive compounds such as water, hydrogen sulfide, carbon dioxide and nitrogen. Gas is processed through refrigeration, lean oil absorption, or cryogenic extraction to reduce various levels of natural gas liquids (NGLs) such as ethane, propane, butanes, pentanes and hexanes plus. The level of NGL extraction is dependent upon the technology, existing NGL infrastructure, economics and known gas specification requirements. Some existing and future domestic supply sources do not have access to processing plants and may not be sufficient in volume to justify the cost of processing. In this case, pipeline blending (contract) may be the preferred option as to not limit supplies which otherwise cannot be processed. The gas delivered into a pipeline will have distinct composition and characteristics depending on the extent of any treatment or processing as well as the original gas source and composition. The gas quality and interchangeability characteristics of treated/processed "conventional" natural gas and coal-bed methane, for example, can vary significantly, and gases of these two types may not be interchangeable with each other.

7.1.2 Imported LNG is processed at the production source primarily for the removal of NGL components, such as pentanes and hexanes plus, that would freeze during the liquefaction process. This means LNG generally does not contain the heavier hydrocarbons but does contain appreciable concentrations of ethane and propane with some butane(s). Many LNG-importing countries have developed their gas distribution infrastructure based on regasified LNG and have set minimum heating value standards, which are relatively high compared to the North American market. It is important to note that Japan, Korea and Taiwan import over 70% of globally traded LNG, and their gas specification of relatively high heating value has served as the basis of many current and future LNG supplies. LNG suppliers could add equipment to remove additional NGLs from their gas stream but have elected to produce a higher Btu content LNG more compatible with world markets. Also, many LNG supply regions lack infrastructure and markets for extracted ethane and propane products. In addition, economics favor leaving some NGLs in the gas as transportation and sales are executed on an energy (Dekatherm) basis. Reducing the NGL content reduces the energy value of the LNG and reduces the economic value of each cargo for the supplier.

7.2 Management Prior to Introduction Into the Transmission Pipeline System

7.2.1 Imported LNG can be processed to reduce the NGL content at the LNG receiving terminal. LNG terminal operators or shippers contracting with terminal operators or third parties can use NGL separation technology to achieve the desired interchangeability indices. The feasibility of this option is dependent upon the economics of NGL extraction

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 15 of 250

and the proximity of local markets and/or available infrastructure to transport the NGL to market. Given these facts, this option is viable only in the Gulf Coast (Texas and Louisiana) or other coastal locations where there is sufficient NGL demand and infrastructure. NGL extraction economics in the Gulf Coast have weakened in more recent years due to the impact of escalating natural gas prices. There are no NGL extraction plants associated with the three existing LNG terminals along the East Coast. There is a small third party slipstream NGL extraction facility processing a portion of the regasified LNG from the Gulf Coast LNG terminal.

7.2.2 In theory, LNG terminal operators have the option of using an extracted NGL product stream as a fuel source, for example, to generate power; however, this option is generally not viable because the NGL supply would likely exceed the energy consumed and varies in volume and composition with changing LNG supplies.

7.2.3 Injection of an inert gas is an option at the LNG terminal. There are three types of inerts that can be used:

- Nitrogen
- Air, and
- Flue gas

7.2.4 Inert gas injection reduces the heating value, increases the specific gravity of the gas, and as a consequence reduces the Wobbe Number and changes other interchangeability indices. For example, injection of one (1) percent by volume of nitrogen or air reduces the Wobbe Number of natural gas by approximately 1.3 percent.⁷

7.2.5 The costs of air injection are significantly lower than nitrogen injection. Air injection has been historically used for managing interchangeability. It is common in propane/air peak shaving and is also used at city gate stations in some regions of the US where the base natural gas supplies currently contain less inerts than the historical appliance adjustment gases.

7.2.6 There is one drawback with air injection, as it introduces oxygen into the natural gas; for example, injection of 3 percent air by volume results in an oxygen level to approximately 0.6 mol%. These oxygen levels may not be acceptable because of current tariff restrictions, concerns about pipeline integrity, underground gas storage, and impact on feedstock plants and other end uses, such as peak shaving.

7.2.7 Injection of flue gas is an option; however, it requires that a source of flue gas be in immediate proximity of the terminal. None of the domestic terminals use flue gas injection. In addition, the presence of oxygen, other combustion products such as CO₂ and moisture in the flue gas pose a more severe risk to pipeline integrity as these components can all contribute to corrosion of steel. Special care may need to be taken for LNG sources that use this technology and are upstream of underground storage fields or other locations

⁷ The reduction in a parameter such as Wobbe Number will be greater than the simple reduction in heating value alone as the specific gravity is also increased.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 16 of 250

that may operate as a wet gas system, since corrosion at those locations could occur as a result of the formation of carbonic acid.

7.2.8 Blending within an LNG receiving terminal is conceivably an option. An LNG terminal operator may have the option to blend two LNG sources to achieve an overall specification; however, this may create operational issues and to rely on this option for all but a small portion of the supply would reduce overall terminal capacity. As such, blending is not a viable option for terminal operators.

7.2.9 Blending applied by the pipeline operator is also technically feasible. However, widespread use of blending is out of the direct control of the pipeline operator. The transportation of natural gas is governed by daily and sometimes more frequent nomination of volumes and specification of receipt and delivery points by shippers. Consequently, any pipeline blending that occurs is coincidental and historically has not been planned to achieve a specific end point or specification. Even in pipelines where blending currently occurs, this practice is thus not a consistently reliable method of interchangeability management.

7.2.10 It is important to note that following implementation of FERC Order 636, significant numbers of producers have entered into contracts with pipelines to transport their gas without prior NGL removal. This situation resulted as the production sources developed near the existing pipeline infrastructure and producers determined that it was either infeasible or not economically attractive to extract NGLs. The volume of any one source tended to be small, approximately less than 10 Mmscfd, and pipelines were often able to take advantage of incidental blending to achieve a delivered gas that was acceptable.

7.2.11 In summary, of all the options described above, inert injection is the most widely investigated and implemented option to date for North America LNG imports. NGL separation may be a viable option in particular situations. Both of these solutions increase the cost of the natural gas supply because of the additional costs of conditioning the LNG stream. .

7.3 Management at the Point of End Use

7.3.1 Some gas utilities in the Rocky Mountain Region use air injection at the city gate stations. This inert gas injection serves to condition their mid-continent supply gas from a Wobbe Number of 1330 to 1200; appliances in this region were originally adjusted for high nitrogen (low Wobbe Number) natural gas, and the higher Wobbe Number supplies were shown to result in interchangeability problems. This management process is similar to that described in section 7.2 *Management Prior to Introduction Into the Transmission Pipeline System*. It should be noted that this gas quality management practice in the Rocky Mountain Region is the exception in the current national LDC infrastructure. For some large industrial natural gas customers in France, such as several glass manufacturing factories, air injection equipment has been used to stabilize the quality of their fuel gas.

7.3.2 Another option is to inspect end use equipment such as gas appliances and if necessary, to adjust improperly operating equipment for changing gas quality. To be

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 17 of 250

effective, this option requires a high percentage of installed equipment to be inspected and adjusted by trained personnel. This approach is expensive and requires multiple years for complete implementation. Although difficult when large numbers of customers are involved, this approach has been effective in different parts of the country.

7.3.3 There are also options that can provide greater clarity for equipment manufacturers and aid in development of North American interchangeability standards. The options include

- Addition of specificity to design and installation standards
- Development and implementation of a limit-gas testing regime

Each of these is described in greater detail below.

7.3.4 In general, end use equipment is designed presuming that a gas stream of an unchanging known composition will be the sole and continued fuel source. However, as described above, the composition of the domestic natural gas has evolved over time, and in addition, the composition of natural gas varies from region to region within the country. Manufacturers could adjust the design basis for particular end use applications, especially for low emission equipment. Also manufacturers could adjust combustion equipment at the factory and seal the equipment to ensure that it arrives for installation in a configuration consistent with the design basis.

7.3.5 End use equipment manufacturers do provide instructions for installing and placing equipment into service. Manufacturers and even the organizations that publish national consensus standards could develop installation and adjustment standards that ensure that the equipment is installed and placed into service according to the equipment design. The standards could also provide guidance for installers in the event that factory settings are found to be out of spec.

7.3.6 Much of the end use equipment in place today is placed into service using one test gas, usually whatever gas is delivered at the time the testing is undertaken. National consensus standards developing organizations or manufacturers working together could define a multiple test-gas testing regime. This is the approach that is used in the European Community for appliances. A benefit of this approach is that it defines the working range for end use equipment. The working range can then be factored into broader interchangeability standards.

7.3.7 In summary, the options in 7.3.3 are of value for equipment that will be manufactured, installed and placed into operation in the future. Applying these options for end use applications with large fleets in place, such as appliances will be extremely costly.

8.0 Findings

1. The heating value specification alone, as used in some tariffs today, is not an adequate measure for gas interchangeability. However, it may be an appropriate

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 18 of 250

parameter to assure interchangeability if used in conjunction with other specifications.⁸

2. Most pipeline tariffs do not contain adequate specifications to define or set interchangeability limits. Most gas distribution company tariffs do not contain them either.
3. There is a large body of work that has been conducted by the American Gas Association and other research bodies on interchangeability and interchangeability indices. In addition, a number of pipeline and distribution companies have amassed first-hand operating experience in managing interchangeability. Other parts of the world including Europe have also successfully instituted programs to manage interchangeability. However, it is not known to what extent this research and experience applies to low emissions combustion technology.
4. Gas interchangeability indices represent the best starting point for developing guidelines for natural gas interchangeability.
5. The Wobbe Number provides the most efficient and robust single index and measure of gas interchangeability. There are limitations to the applicability of the Wobbe Number, and additional specifications are required to address combustion performance, emissions and non-combustion requirements.
6. Gas interchangeability guidelines must consider historical regional gas compositional variability as well as future gas supply trends. Interchangeability is an issue for both domestic gas supply and LNG imports.
7. European experience suggests that understanding the historical range of gases distributed in the U.S. is critical in establishing future interchangeability guidelines.
8. Presently, there are limited data characterizing the changes that have occurred over time in natural gas composition on a regional basis.
9. Combustion equipment in use today is characterized by two major categories of technology, conventional and low emissions. Low emissions combustion technology, developed primarily in response to Federal and State emissions requirements, is relatively new. Current low emissions combustion technology utilizes various control systems, exhaust treatments, designs to achieve lower emissions and can vary by application. In some applications, the newer technology improves fuel efficiency and reduces cost.
10. Varying natural gas composition beyond acceptable limits can have the following effects in combustion equipment:

⁸ The Work Group agreed to standardize on a set of terms to use in defining interchangeability. "Indices" are defined in AGA Bulletin 36 and Weaver (e.g. - incomplete combustion index, yellow tipping, etc.). "Parameters" are used to define ranges or limits for components expressed as composition. "Specifications" encompass both indices and parameters.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 19 of 250

- a. In appliances, it can result in soot formation, elevated levels of carbon monoxide and pollutant emissions, and yellow tipping. It can also shorten heat exchanger life, and cause nuisance shutdowns from extinguished pilots or tripping of safety switches.
 - b. In reciprocating engines, it can result in engine knock, negative changes in engine performance, and decreased parts life.
 - c. In combustion turbines, it can result in increased emissions, reduced reliability/availability, and decreased parts life.
 - d. In industrial boilers, furnaces and heaters, it can result in degraded performance, damage to heat transfer equipment and noncompliance with emission requirements.
 - e. In all end use equipment, it can result in flame instability, including lifting and blowout in appliances.
11. For traditional end use equipment, evaluation of interchangeability begins with the concept of adjustment gas. The adjustment gas may be specified as the average of a consistent historical supply or as target values established by the utility. In cases where the historical supply has varied and there is no established target, the adjustment gas concept is more difficult to develop and quantify.
12. Varying gas composition beyond acceptable limits can be problematic in non-combustion-related applications where natural gas is used as a manufacturing feedstock or in peak shaving liquefaction plants, because historical gas compositions were used as the basis for process design and optimization of operating units. More specifically, domestic LNG peak shaving liquefaction plants will most likely require retrofits to continue operations with regasified LNG as feedstock. Propane-air peak shaving operations will also likely require retrofits and/or additional controls to continue operations.
13. Gas interchangeability guidelines must consider the full range of requirements for all end use equipment.
14. Fluctuations in composition beyond the limits equipment is tuned to receive, particularly if it occurs over a short period of time, is likely to reduce the ability of some equipment to perform as intended by the manufacturer.
15. Combustion turbine operation with fuel gas supplies near or above 1400 Wobbe occurs at world-wide locations; however proper operation, including meeting emission limits, of some existing equipment may require installation of additional equipment and control systems, including fuel pre-heat requirements. Additional constituent limits may be necessary (such as butanes+, propane etc) to address

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 20 of 250

manufacturer concerns until research/data are available to better understand the impact on operability of this equipment.

16. The time rate of change of fuel composition changes is problematic for some end use applications, including combustion turbines. As a practical matter, in general, the work group found that gas composition variability rate of change should not be a significant issue and should meet existing turbine manufacturers' requirements.
17. Modern gas internal combustion engines can operate safely and efficiently over a reasonable range of Wobbe and Heating Value numbers with closed loop controls. However, as indicated earlier in the paper, excessive concentrations of higher hydrocarbon constituents such as propane and ethane results in low Methane Numbers and damaging engine knock. Limits on these constituent limits in addition to Wobbe and Heating Value ranges may be necessary to satisfy manufacturer' fuel specifications.
18. Presently, there are limited publicly and readily available data for the full range of end use equipment and gas supplies.
19. Historical interchangeability indices have been widely used for conventional combustion appliances and are recognized default specifications when actual operating data are unavailable.
20. Limited testing and research conducted by distribution companies, equipment manufacturers and researchers indicate that historical indices may not adequately account for the full range of effects with low emissions technology.
21. The European experience in gas interchangeability highlights important issues for establishing U. S. interchangeability guidelines and demonstrates significant differences from the U. S. situation.
22. Interchangeability specifications can be used to define an operating regime that addresses end use effects, such as auto-ignition, stability, incomplete combustion and pollutant formation among others. The Work Group found that based on current and projected available gas supply, at least two interchangeability specifications are required to adequately address the end use effects.
22. Gas system infrastructure impacts must be considered when supply compositions change for extended periods of time. The impacts when shifting to a dry, leaner supply source may include failure of certain gas transmission and distribution piping component seals and gaskets in valves, pipe clamps, joint sealants and other mechanical components. Additional infrastructure issues include impacts to custody transfer gas measurement techniques (thermal vs. volumetric billing) and related gas accounting issues.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 21 of 250

23. In the majority of cases, interchangeability is best managed at two key points along the value chain, at the origin of supply or prior to delivery into the existing pipeline infrastructure.
24. Overly broad limits in the interchangeability specifications may result in reduced reliability, increased emissions, and decreased safety on end use equipment, and consequently higher costs to consumers. On the other hand, unduly conservative restrictions on the interchangeability specifications due to lack of data may result in both limited supply options and higher costs to the consumers.
25. Interstate transmission pipelines transport 80 percent of the natural gas. Approximately, 20 percent of the natural gas consumed is produced and consumed within the same state. The FERC has jurisdiction over interstate transmission pipelines while State agencies have jurisdiction over intrastate transmission.
26. Gas supply compositions within the US vary by region depending on demand, available supply, the degree of processing and pipeline blending. The 1992 GRI survey of gas supplies included gas composition data for over 6,800 samples from 26 cities in the United States. The absolute minimum and maximum Wobbe numbers in the data were 1201 and 1418, respectively. Most of the data showed a narrower range of Wobbe numbers, with tenth and ninetieth percentile levels of 1331 and 1357, respectively. The team found that the historical range of gas compositions reported in the 1992 survey has been successfully utilized; more recent gas composition data is currently being collected. However, it is critical to recognize that not all gases within the absolute range are interchangeable with each other. The range of interchangeability for a given region is considerably tighter than the variation between regions of the country.
27. Complete management of gas interchangeability requires specification of both minimum and maximum limits for Wobbe numbers. The issue of supplies with increasing Wobbe numbers is currently more widespread than the issue of supplies with decreasing Wobbe numbers. Furthermore, a number of utilities with low Wobbe supplies have implemented interchangeability management practices in the past, while many utilities already receiving or anticipating receipts of higher Wobbe number supplies have little to no experience in interchangeability management. The Team's focus was therefore evaluation of maximum Wobbe limits. The Team recognized the equal importance of a minimum Wobbe limit and the need for inclusion in the proposed research program.
28. It has become apparent through the work of the NGC+ Interchangeability Technical Team that significant data gaps exist that inhibit non-traditional supplies from entering the North American market. There is general recognition that a collaborative effort will be necessary to conduct research and obtain essential information necessary to maximize supplies into the marketplace including D.O.E., equipment manufacturers, suppliers, pipelines, LDC's and other industry trade groups. As a result, to meet the recommendations of the NPC Report, it is proposed that the abovementioned research be accomplished within a two-year time frame

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 22 of 250

beginning in 2005. This aggressive schedule is necessary to minimize risks associated with any interim guidelines adopted while awaiting the additional information needed to allow LNG imports and additional domestic supplies maximum penetration into the North American market.

9.0 Recommendations

1. The Work Group recommends the completion of work started by this group to gather and analyze historical composition data that will better characterize the change in natural gas supply on a region-by-region and market-by-market basis. This data gathering process must be standardized so that on-going data collection can be used to develop a better understanding of shifts to the historical compositions.
2. The Work Group recommends the completion of work started by this group on the effects of changing supply on particular end use equipment.
3. The Work Group recommends that appliance manufacturers and equipment certifying organizations for gas burning equipment consider adopting limit gases testing that is representative of current and future supplies. Such testing as part of the design certification process will help ensure that new appliances and equipment can deliver safe and reliable performance under varying and changing gas supply conditions. In addition, an education process is recommended promoting appliance inspections and adjustment during a period of transition to new gas supplies.
4. Additional research must be conducted to define the compositional limits of natural gas to support development of longer-term interchangeability guidelines for low emission and high efficiency combustion designs.
5. The Work Group recognized the value in adopting a national range for key parameters such as the Wobbe Number to provide certainty for producers and suppliers. This specification is equally important for domestic supply and for imported LNG. However, the Work Group also recognized the need for flexibility since certain areas may be able to utilize a wider range of gas compositions than other areas.
6. While adopting a wide national range for key specifications such as the Wobbe Number is important for supply flexibility, acceptable interchangeability ranges for specific regions or market areas may be more restrictive as a consequence of historical compositions and corresponding end use settings.
7. The Work Group supports the use of processes for development of interchangeability specifications based on the Wobbe Number and supplemental parameters that can be applied regionally, locally, and nationally. These processes have been used in a number of local and regional interchangeability studies over the past three decades. Appropriate processes incorporate the following elements:

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 23 of 250

- a. Historical gas supply characteristics to accommodate current end users and equipment requirements,
 - b. End use equipment gas interchangeability requirements based on published end use equipment test data and to the extent required, additional testing over the range of gases representative of current and future supplies,
 - c. Consideration of interchangeability management options and costs, and
 - d. Development of numerical specifications.
8. The NGC+ Interchangeability Work Group has identified several "information gaps" that must be addressed to better understand the overall impacts of gas interchangeability in North America. These gaps must be addressed to provide the maximum level of supply flexibility considering current global LNG import composition profiles as well as evolving domestic supply compositions. More importantly, reaching consensus among major stakeholders in the gas supply, transportation and end use value chain is predicated on filling these gaps in a timely fashion. Consensus on interim guidelines relies upon establishing a process and timeframe for filling the technical gaps based on sound scientific analysis and testing.
9. The Work Group recommends that a transition plan be adopted given the lack of readily available historical data to characterize both the change in natural gas supply and in end use equipment. The transition plan is based on adoption of recommendations described above and adoption of interim interchangeability guidelines given below. The purpose of the transition period is to maximize supply while gaining additional experience and knowledge.
10. The work group recognizes that compositional limits for specific gas constituents may be needed (in addition to the proposed Interim Guidelines to address non-combustion feedstock issues including but not limited to domestic LNG peak shaving liquefaction plants. The work group also recognizes that imposing general constituent limits would be inappropriate because the design bases for these facilities vary with the historical supplies delivered at the time of the facilities' construction. These constituents include:

Non-methane Hydrocarbons

- Ethane
- Propane
- Butane(s)
- Pentane(s)
- Hexanes+

Inerts

- Nitrogen
- Carbon Dioxide

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 24 of 250

Furthermore, the work group recommends that each facility/process impacted by changing supply composition be evaluated on an individual basis. Facilities that will receive supplies exceeding design feedstock constituent limits will require retrofit to maintain design capacity and efficiency of operation. Retrofits will likely vary from facility to facility and will incur new and unplanned operating and capital expenditures. Evaluation of these retrofits and associated cost burdens must be considered during the Regulatory approval process.

11. The Work Group recommends that interim interchangeability guidelines be applied during a transition period of no more than three years so that the data gaps can be closed and interchangeability guidelines/standards can be formally developed. Alternative language was suggested as well, and long-term guidelines will be developed within a timeframe to be defined.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 25 of 250

Recommendations for Interim Guidelines for Gas Interchangeability

Background

The Work Group recognizes that there is a need to maximize the available supply and at the same time meet the specifications of end use equipment. As stated above, the Work Group found that there are gaps in the data regarding regional characteristics as well as the specific limitations and tolerances for end use equipment. The Work Group recommended the adoption of a transition period to gather and analyze additional data and conduct more testing to provide a basis for establishing more definitive guidelines. Specific gaps that must be addressed during this transition period form an integral part of this recommendation. Ultimately, the desire is to create as much flexibility in supply with which end use equipment can operate, in a manner that does not materially change operational safety, efficiency, performance or materially increase air pollutant emissions.

The Work Group discussed at length development of numerical guidelines for gas interchangeability. At this time, the Work Group recommends interim guidelines for gas interchangeability based on: (1) extensive data and analysis for traditional gas appliances and combustion behavior in appliances, and (2) the lack of data on gas interchangeability for a broad range of other end use applications. The interim period for use of these guidelines depends upon the filling of major data gaps for end uses (see Table 1 and Table 2) and consensus needed for interchangeability requirements of these end uses, which is forecasted to require 2 to 3 years. After that time period, it is envisioned that development of more complete and longer-term guidelines can be pursued.

The interim guidelines are for gases delivered to points in the gas transportation system most closely associated with end users: gases delivered to local distribution companies (LDCs). The guidelines do not necessarily apply directly to points upstream in the transportation system where blending, gas processing, and other factors may suggest that gases outside the ranges of the guidelines will still satisfy the guidelines at LDC city gates. The Work Group is continuing to investigate development of guidelines for points upstream.

Field installation and adjustment represent a set of initial conditions under which interchangeability must be considered. Therefore, the interim guidelines focus on consistency with historical gases (also referred to as "adjustment gases") since locally, historical gases represent the basis for field installation and adjustment of appliances. The Work Group used the 1992 GRI report on natural gas composition in 26 major US cities⁹ as the historical baseline for gases nationally and regionally. The use of these data is the basis for establishing interim guidelines for the ranges of interchangeability. At this time, it is conservative to limit the boundaries for interchangeability ranges to gases seen historically in the U. S. gas system.

⁹ "Variability of Natural Gas Composition in Select Major Metropolitan Areas of the United States," Gas Research Institute, March 1992, GRI-92/0123.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 26 of 250

The interim guideline limits proposed in this document have been developed for new gas supplies to those market areas without extended experience with gas supplies characterized by Wobbe Numbers higher than 1,400 or gross heating values higher than 1,110 Btu/scf.¹⁰ The limiting values were developed using conventional interchangeability index calculations based on an adjustment gas corresponding to the mean of the annual average composition data in the 1992 GRI composition report.¹¹ The 1992 "average" gas was characterized by a Wobbe Number of 1345 and gross Heating Value of 1035 Btu/scf. This "average" gas is assumed to be a reasonable estimate for an average adjustment gas in the US. It is important to note that the limiting values in the interim guidelines simply serve to establish boundaries for market areas that have received historical gas supplies with gas quality close to the 1992 reported national mean and that have experienced successful end use with these gas supplies. These boundaries should be applicable until additional research and/or experience has clearly demonstrated that supplies above the caps do not negatively impact end users in these market areas.

¹⁰ Based on gross or higher heating value (HHV) at standard conditions of 14.73 psia, 60°F, dry, real basis.

¹¹ Details of these calculations are given in Appendix G.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 27 of 250

Interim Guidelines

- A. A range of plus and minus 4% Wobbe Number Variation from Local Historical Average Gas or, alternatively, Established Adjustment or Target Gas for the service territory.¹

Subject to:

Maximum Wobbe Number Limit: 1,400²

Maximum Heating Value Limit: 1,110 Btu/scf²

- B. Additional Composition maximum limits:¹

Maximum Butanes+: 1.5 mole percent

Maximum Total Inerts: 4 mole percent

- C. EXCEPTION: Service territories with demonstrated experience³ with supplies exceeding these Wobbe, Heating Value and/or Composition Limits may continue to use supplies conforming to this experience as long as it does not unduly contribute to safety and utilization problems of end use equipment.

Notes:

¹ Experience has shown that using this plus/minus four percent formula in combination with the compositional limits will result in a local Wobbe range that is above 1,200.

² Based on gross or higher heating value (HHV) at standard conditions of 14.73 psia, 60°F, dry, real basis.

³ Demonstrated experience refers to actual end use experience established by end-use testing and monitoring programs.

Table 1 Data Gaps -Combustion Applications

COMMON REQUIREMENTS				
ADDITIONAL REQUIREMENTS/NOTES				
END-USE EQUIPMENT	Appliances	Turbines & Micro-turbines & Power Boilers	Industrial & Commercial Burners	Stationary & Vehicle Engines
A. Review and Classification of Equipment <ul style="list-style-type: none"> Types of equipment, burners. List of manufacturers. Rank by sensitivity to fuel composition. Emissions issues and mitigation strategies. 	<ul style="list-style-type: none"> Review existing interchangeability project results. Work with GAMA and others to identify new appliance types. 	<ul style="list-style-type: none"> All major types and manufacturers can be identified. 	<ul style="list-style-type: none"> Classify burners and combustion systems by types. Must consider legacy, operating burners and new types under development. 	<ul style="list-style-type: none"> Survey of manufacturers and equipment models. Review operations and emissions measurements and requirements.
B. Collection of Available Data <ul style="list-style-type: none"> Previous US and International studies (GTI, TIAX, SoCalGas, etc). Manufacturers' data on <ul style="list-style-type: none"> Emissions, Efficiency, Service life, Combustion changes, Mitigation alternatives and costs. Impacts of slow and rapid fuel gas changes. Determination of major data gaps. 	<ul style="list-style-type: none"> Standardizing results of previous interchange-ability studies. Identify common conclusions Previous data for interchangeability parameters (Wobbe, Weaver, AGA Bulletin #36, etc). CO production. 	<ul style="list-style-type: none"> Most data is proprietary and in the hands of manufacturers. Collect published data and performance data from users. 	<ul style="list-style-type: none"> Data may not currently be available. Performance data from different manufacturers is not on a consistent basis. 	<ul style="list-style-type: none"> Collect as much manufacturer data as possible. Collect data from publications and users.
C. Determination of Testing Needs and Standardized Testing Protocols <ul style="list-style-type: none"> Documentation of test methods. Repeatability of testing. Selection and measurement of all pertinent parameters. Develop test gas strategies: <ul style="list-style-type: none"> Define acceptability criteria (Btu, Wobbe, Methane Number, other), Define range of acceptability, Testing at limits of acceptability range, Compositional issues (C₁, C₂, C₃, C₄, etc). Specification of clocking and tuning strategies. Fundamental combustion properties of natural gas mixtures 	<ul style="list-style-type: none"> Evaluation of current standards for appliance testing and emissions limits. Long-term testing of sensitive appliances. Statistical analysis may replace some testing. 	<ul style="list-style-type: none"> Testing and resulting data may be proprietary Measurement methods must be established Method development may be required. C₄+ issues Significance of Methane Number. Fundamental property evaluation, combustion stability etc. 	<ul style="list-style-type: none"> Method development may be necessary. Selected testing methods to be based on combustion practice and made public. 	
D. Equipment Testing <ul style="list-style-type: none"> Possible field and/or laboratory testing. Examine interchangeability parameters under controlled conditions. Fill data gaps. 	<ul style="list-style-type: none"> Statistically relevant group of appliances with a range of types and ages. Statistical evaluation of appliance "mal-adjustment" over time. 	<ul style="list-style-type: none"> Test stand studies preferred whenever possible. Testing with working power turbines, only if necessary. 	<ul style="list-style-type: none"> Representative examples of the most sensitive types of burners and combustion systems to be tested in the laboratory. Most sensitive burners to be field tested. 	<ul style="list-style-type: none"> Test engines in lab setting. Test existing and older engines in place.
E. Data Analysis and Expected Results <ul style="list-style-type: none"> Identify relationships between performance and fuel composition, if these exist. Establish/confirm applicable interchangeability parameters. Predictive tools for effect of changing fuel composition on performance. 	<ul style="list-style-type: none"> Determine if limit gas testing is recommended to enhance equipment flexibility with varying fuel supply compositions. 	<ul style="list-style-type: none"> Recommended equipment. Retrofits and additional long-term testing if required. 	<ul style="list-style-type: none"> Recommended equipment Retrofits and additional long-term testing is required. New types of indices may be developed. 	<ul style="list-style-type: none"> Recommended controls and equipment retrofits. Additional long term testing if required.

COMMON REQUIREMENTS				
Table 1 Data Gaps - Combustion Applications				
ADDITIONAL REQUIREMENTS/NOTES				
END-USE EQUIPMENT		Appliances	Turbines & Micro-turbines & Power Boilers	Industrial & Commercial Burners
F. Review and Classification of Equipment	<ul style="list-style-type: none"> • Review existing interchangeability project results. • Work with GAHA and others to identify new appliance types. 	<ul style="list-style-type: none"> • All major types and manufacturers can be identified. 	<ul style="list-style-type: none"> • Classify burners and combustion systems by types. • Must consider legacy, operating burners and new types under development. 	<ul style="list-style-type: none"> • Survey of manufacturers and equipment models. • Review operations and emissions measurements and requirements.
	<ul style="list-style-type: none"> • Emissions issues and mitigation strategies. • Rank by sensitivity to fuel composition. • List of manufacturers. • Types of equipment, burners. 	<ul style="list-style-type: none"> • Interchangeability project results. • Previous US and international studies (GTI, TMAX, SocatGas, etc). • Manufacturers' data on Emissions, Efficiency, Service life, Combustion changes, Mitigation alternatives and costs. • Impacts of slow and rapid fuel gas changes. • Determination of major data gaps. 	<ul style="list-style-type: none"> • Collection of Available Data • Previous US and international studies (GTI, TMAX, SocatGas, etc). • Manufacturers' data on Emissions, Efficiency, Service life, Combustion changes, Mitigation alternatives and costs. • Impacts of slow and rapid fuel gas changes. • Determination of major data gaps. 	<ul style="list-style-type: none"> • G. Collection of Available Data • Previous US and international studies (GTI, TMAX, SocatGas, etc). • Manufacturers' data on Emissions, Efficiency, Service life, Combustion changes, Mitigation alternatives and costs. • Impacts of slow and rapid fuel gas changes. • Determination of major data gaps.
H. Determination of Testing Needs and Standardized Testing Protocols	<ul style="list-style-type: none"> • Documentation of test methods. • Repeatability of testing. • Selection and measurement of all pertinent parameters. • Develop test gas strategies: – Define acceptability criteria (Bu, Wobbe, Methane Number, other). – Define range of acceptability. – Testing at limits of acceptability range. – Compositional issues (C₁, C₂, C₃, etc). • Specification of docking and tuning strategies. • Fundamental combustion properties of natural gas mixtures 	<ul style="list-style-type: none"> • Evaluation of current standards for appliance testing and emissions limits. • Long-term testing of sensitive appliances. • Statistical analysis may replace some testing. 	<ul style="list-style-type: none"> • Testing and resulting data may be proprietary • Measurement methods must be established • Method development may be required. • C₁+ issues • Significance of Methane Number. • Fundamental property evaluation, combustion stability etc. 	<ul style="list-style-type: none"> • Method development may be based on combustion practice and made public. • Selected testing methods to be necessary.

White Paper on Natural Gas Interchangeability And Non-Combustion End Use

Exhibit No. FGT-4
Page 30 of 260

Table 1 Data Gaps - Combustion Applications					
COMMON REQUIREMENTS		ADDITIONAL REQUIREMENTS/NOTES			
END-USE EQUIPMENT		Appliances	Micro-turbines & Power Boilers	Industrial & Commercial Burners	Stationary & Vehicle Engines
<p>I. Review and Classification of Equipment</p> <ul style="list-style-type: none"> Types of equipment, burners. List of manufacturers. Rank by sensitivity to fuel composition. Emissions issues and mitigation strategies. 	<p>J. Collection of Available Data</p> <ul style="list-style-type: none"> Previous US and International studies (GTI, TIA, SoCalGas, etc). Manufacturers' data on <ul style="list-style-type: none"> Emissions, Efficiency, Service life, Combustion changes, Mitigation alternatives and costs. Impacts of slow and rapid fuel gas changes. Determination of major data gaps. 	<ul style="list-style-type: none"> Review existing interchangeability project results. Work with GAMA and others to identify new appliance types. 	<ul style="list-style-type: none"> All major types and manufacturers can be identified. 	<ul style="list-style-type: none"> Classify burners and combustion systems by types. Must consider legacy, operating burners and new types under development. 	<ul style="list-style-type: none"> Survey of manufacturers and equipment models. Review operations and emissions measurements and requirements.
		<ul style="list-style-type: none"> Standardizing results of previous interchangeability studies. Identify common conclusions Previous data for interchangeability parameters (Wobbe, Weaver, AGA Bulletin #36, etc). CO production. 	<ul style="list-style-type: none"> Most data is proprietary and in the hands of manufacturers. Collect published data and performance data from users. 	<ul style="list-style-type: none"> Data may not currently be available. Performance data from different manufacturers is not on a consistent basis. 	<ul style="list-style-type: none"> Collect as much manufacturer data as possible. Collect data from publications and users.
		<ul style="list-style-type: none"> Evaluation of current standards for appliance testing and emissions limits. Long-term testing of sensitive appliances. Statistical analysis may replace some testing. 	<ul style="list-style-type: none"> Testing and resulting data may be proprietary Measurement methods must be established Method development may be required. -C₄-+ issues Significance of Methane Number. Fundamental property evaluation, combustion stability etc. 	<ul style="list-style-type: none"> Method development may be necessary. Selected testing methods to be based on combustion practice and made public. 	
<p>K. Determination of Testing Needs and Standardized Testing Protocols</p> <ul style="list-style-type: none"> Documentation of test methods. Repeatability of testing. Selection and measurement of all pertinent parameters. Develop test gas strategies: <ul style="list-style-type: none"> Define acceptability criteria (Btu, Wobbe, Methane Number, other). Define range of acceptability. Testing at limits of acceptability range. Compositional issues (C₁, C₂, C₃, C₄, etc). Specification of clogging and tuning strategies. Fundamental combustion properties of natural gas mixtures 					

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-4
 Page 31 of 250

Table 1 Data Gaps -Combustion Applications					
COMMON REQUIREMENTS		ADDITIONAL REQUIREMENTS/NOTES			
END-USE EQUIPMENT		Appliances	Micro-turbines & Power Boilers	Industrial & Commercial Burners	Stationary & Vehicle Engines
L. Review and Classification of Equipment	<ul style="list-style-type: none"> Types of equipment, burners. List of manufacturers. Rank by sensitivity to fuel composition. Emissions issues and mitigation strategies. 	<ul style="list-style-type: none"> Review existing interchangeability project results. Work with GAMA and others to identify new appliance types. 	<ul style="list-style-type: none"> All major types and manufacturers can be identified. 	<ul style="list-style-type: none"> Classify burners and combustion systems by types. Must consider legacy, operating burners and new types under development. 	<ul style="list-style-type: none"> Survey of manufacturers and equipment models. Review operations and emissions measurements and requirements.
	<ul style="list-style-type: none"> Collection of Available Data Previous US and International studies (GTI, TIAx, SoCalGas, etc). Manufacturers' data on <ul style="list-style-type: none"> Emissions, Efficiency, Service life, Combustion changes, Mitigation alternatives and costs. Impacts of slow and rapid fuel gas changes. Determination of major data gaps. 	<ul style="list-style-type: none"> Standardizing results of previous interchangeability studies. Identify common conclusions Previous data for interchangeability parameters (Wobbe, Weaver, AGA Bulletin #35, etc), CO production. 	<ul style="list-style-type: none"> Most data is proprietary and in the hands of manufacturers. Collect published data and performance data from users. 	<ul style="list-style-type: none"> Data may not currently be available. Performance data from different manufacturers is not on a consistent basis. 	<ul style="list-style-type: none"> Collect as much manufacturer data as possible. Collect data from publications and users.
N. Determination of Testing Needs and Standardized Testing Protocols		<ul style="list-style-type: none"> Documentation of test methods. Repeatability of testing. Selection and measurement of all pertinent parameters. Develop test gas strategies: <ul style="list-style-type: none"> Define acceptability criteria (Btu, Wobbe, Methane Number, other). Define range of acceptability. Testing at limits of acceptability range. Compositional issues (C₁, C₂, C₃, C₄, etc). Specification of clocking and tuning strategies. Fundamental combustion properties of natural gas mixtures 	<ul style="list-style-type: none"> Evaluation of current standards for appliance testing and emissions limits. Long-term testing of sensitive appliances. Statistical analysis may replace some testing. 	<ul style="list-style-type: none"> Testing and resulting data may be proprietary Measurement methods must be established Method development may be required. C₄+ issues Significance of Methane Number. Fundamental property evaluation, combustion stability etc. 	<ul style="list-style-type: none"> Method development may be necessary. Selected testing methods to be based on combustion practice and made public.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 33 of 250

Table 2
Data Gaps Non-Combustion & Feedstock Applications
<ul style="list-style-type: none">• Categories:<ul style="list-style-type: none">○ Chemical feedstock (ammonia, fertilizer, reforming, LNG peak shaving liquefaction, etc)○ Fuel cells.• Identify and survey users/developers.• Determine sensitivity to changes in fuel composition.• Summaries of ranges of acceptable fuel composition and impact of changes• Document necessary process retrofits (if any) & estimate cost impacts.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 34 of 250

**Natural Gas Council Plus
Work Group on Natural Gas Interchangeability
and Non-Combustion End Use Participation**

Ted Williams, American Gas
Association, Chair
Mark Hereth, P-PIC, Facilitator

LNG Suppliers

Edgar Kuipers, Shell
Mike Milliet, ChevronTexaco
Les Bamburg, Semptra
Ben Ho, BP
Mark Bentley, ExxonMobil
Pat Outtrim, Cheniere
Ed Lehotsky, Cheniere
Phil Redding, BG North America
Hubert Loussouarn, Total
Frank Katulak, Tractebel
John Hritcko, Shell
Randy Mills, ChevronTexaco
Al Fatica, BP
Rudy Adamiak, Tractebel
Greg Bartholomew, Semptra

Pipelines

Terry Boss, Interstate Natural Gas
Association of America
Grant McCracken Panhandle Energy
Todd Dustman, Questar
Hank Poellnitz, El Paso
Dennis Alters, Cross Country Energy
Scott Zersen, El Paso
Reji George, El Paso
Ian Morris, Cross Country Energy
Thanh Phan, Duke Energy
Jeryl Mohn, Panhandle Energy
David Noss, Dominion Energy
Bruce Hedman, Energy and
Environmental Analysis

Utilities (LDCs and in some instances
Power Generation)

Robert Wilson, Keyspan Energy
Larry Sasadeusz, Southern California
Gas Company

Rosemarie Halchuk, Xcel Energy
Peter Collette, Public Service Electric and Gas
John Erickson, American Public Gas
Association
Kevin Shea, Southern California Gas
Company
Lee Stewart, Southern California Gas
Company
Joe Bonner, Pacific Gas and Electric
Mark Satkamp, Louisville Gas and Electric
Robert Trumbower, Peoples Gas
Glen Schwalbach, Wisconsin Public Service
Michael Gerdes, BSH
Michael Farmer, Peoples Gas
Pieter Ouwerkerk, Exelon
Robert Kemper, Southern California Gas
Company
Frank Strauss, Consolidated Edison
Ali Quraishi, American Gas Association
Steven Zavodnick, Baltimore Gas and Electric
Lori Traweck, American Gas Association
Ed Anderson, RJRudden
Regis Klingler, CMS Energy
Jack Zerega, Public Service Electric and Gas
Richard Rudden, RJ Rudden and Associates
Joseph Santaro, Niagara Mohawk

Power Generation

Chuck Linderman, Edison Electric Institute
Jack Cashin, Electric Power Supply
Association
Bruce Rising, Siemens
Craig Chancellor, Calpine
Colin Wilkes, General Electric Power
Generation
Keith Barnett, American Electric Power
Dona Gussow, Florida Power and Light
Mike Klassen, Combustion Science &
Engineering, Inc.
Richard Roby, Combustion Science &
Engineering, Inc.
Nicole Prudencio, Calpine

**White Paper on Natural Gas Interchangeability
And Non-Combustion End Use**

**Exhibit No. FGT-8
Page 35 of 250**

Jim Downs, Calpine

Feedstock

Tom Carville, The Fertilizer Institute
George Valadez, Alcoa.
Dena Wiggins, Process Gas
Consumers
Dave Schalles, Bloom Engineering
(for Alcoa)
Kirsten Gibbs, Process Gas
Consumers

Appliances

Mark Kendall, Gas Appliance Manufacturers
Association
Frank Stanonik, Gas Appliance Manufacturers
Association
Richard Cripps, Association of Home
Appliance Manufacturers
Jack Goldman, Hearth, Patio and Barbecue
Association

Research

David Rue, GTI

State Official

Eric Orton, State of Utah

Gas Processing

Mark Sutton, Gas Processors Association

Meetings and Conference Calls of the Main Work Group

April 2 -- conference call
May 13-14 - meeting (Houston)
June 6 - conference call
July 1 - conference call
July 22-23 - meeting (Washington)
September 10 - conference call
September 13-14 - meeting (Houston)
October 18-19 - meeting (New Orleans)
October 25 - conference call
October 27 - conference call
October 29 - conference call
December 7-8 - meeting (Washington)
December 14 - conference call
December 16 - conference call
February 2-3 -- meeting (Houston)
February 11 -- conference call
February 14 -- conference call
February 23 -- conference call
February 25 -- conference call

200506305008 Received FERC OSEC 06/30/2005 10:43:00 AM Docket# PL04-3-000

**White Paper on Natural Gas Interchangeability
And Non-Combustion End Use**

**Exhibit No. FGT-6
Page 36 of 250**

**White Paper on Natural Gas Interchangeability
And Non-Combustion End Use**

**Exhibit No. FGT-6
Page 37 of 250**

**White Paper on Natural Gas Interchangeability and
Non-Combustion End Use**

Appendices¹²

- A. Overview of Natural Gas Supply and Historical Characterization Data, Mike Millet, Chevron Corporation and Bruce Hedman, EEA**
- B. Impact of Changing Supply on Natural Gas Infrastructure, Terry Boss, INGAA and Bob Wilson, Keyspan**
- C. Changing Supply Impacts on End-Use (Burner Tip Combustion Issues), Ted Williams, AGA and Bob Wilson, Keyspan, Coordinators**
 - Overview of End Use – Bruce Hedman, EEA
 - Appliances – Mark Kendall, GAMA and Ted Williams, AGA
 - Power Generation – Mike Klassen, Combustion Science and Engineering
 - Reciprocating Engines – Bruce Hedman, EEA
 - Industrial Heating – [Section not provided]
- D. Monitoring Interchangeability and Combustion Fundamentals, Edgar Kuipers, Shell Trading**
- E. Managing Interchangeability, Grant McCracken, Cheniere LNG**
- F. Changing Supply Impacts on End Use (Non-Combustion Issues) [Appendix materials not provided]**
- G. Derivation of Interim Guideline Calculations – Rosemarie Halchuk, Xcel Energy and Bob Wilson, Keyspan**
- H. Research Recommendations – Bob Wilson, Keyspan, Rosemarie Halchuk, Xcel Energy, David Rue, GTI, and Ted Williams, AGA**

¹² Appendices are the contributions of the listed authors and have not been subjected to the consensus review of the Work Group. As such, the appendices do not necessarily represent the views of the Work Group.

**White Paper on Natural Gas Interchangeability
And Non-Combustion End Use**

**Exhibit No. FGT-6
Page 38 of 250**

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 39 of 250

Appendix A

Overview of Natural Gas Supply and Historical Characterization Data

Mike Milliet
Chevron Corporation

Bruce Hedman
Energy and Environmental Analysis

A.1 Introduction - Natural Gas Supply and Demand Balance

From 1998 through 2003, gas consumption as reported by U. S. Energy Information Administration (EIA) and industry analysts has been essentially flat at 22 to 23 Tcf. Natural gas consumption in the United States for the year 2003 was 22.4 trillion cubic feet.¹ Over this period, natural gas supplies available to the United States has not grown in a manner that would allow for increases in gas consumption. At the same time, the underlying drivers for gas consumption – including a rapidly increasing need for gas fired electricity generation – have continued. Extended periods of high gas prices and increases in price volatility have been a direct result of the lack of development of new sources of gas supply sufficient to meet the market's desire for more natural gas.

A recent study conducted by Energy and Environmental Analysis, Inc for the INGAA Foundation anticipates that U.S. natural gas consumption could approach 30 Tcf by the end of the next decade if the supply of gas is developed². But if this growth in consumption is to occur, large amounts of infrastructure including pipeline capacity, storage capacity, and LNG terminal capacity must be built in the United States and Canada.

While gas produced in traditional basins such as the mid-continent, onshore Louisiana and the shallow waters of the Gulf of Mexico will continue to be important sources of supply, by themselves they will not be sufficient to satisfy growing demand over the next two decades. To meet a growing demand, gas from "frontier regions" will also need to be developed. These frontier supplies include the deepwater offshore in the Gulf of Mexico, unconventional gas in the U.S. and Canadian Rockies, Arctic gas, Eastern Canadian gas and large volumes

¹ EIA Natural Gas Annual

² This supply summary is based on an INGAA Foundation report developed by Energy and Environmental Analysis, Inc (EEA) entitled "An Updated Assessment of Pipeline and Storage Infrastructure for the North American Market", July 2004. EEA has updated its baseline energy supply and demand projection since the issue of this report. However, the conclusions on supply needs and potential future resource mix has not materially changed from those summarized in this section.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 40 of 250

of LNG. The development of these resources will require large capital commitments and the construction of major infrastructure projects. If the infrastructure required that is to provide growing supplies of natural gas from frontier regions is not constructed, tremendous price pressure leading to prices well above today's levels would develop in order to restrict demand growth. The EEA Base Case used for the INGAA Foundation study assumes that natural gas supply and infrastructure that is economic is developed. If, however, government policy and public opposition to the construction of the required infrastructure prevent the facilities from being built, gas supplies will be unable to grow to meet market demand. As a result, there could be tremendous pressure on gas prices that could hinder economic growth and the competitiveness of U.S. industry.

A.2 Natural Gas Supply Summary (EEA)

Natural gas supply from multiple sources will have to grow to meet the projected 30 Tcf U.S. market by the end of the next decade. Most industry analysts, including EEA, believe that U.S. and Canadian natural gas production from traditional basins is in decline. Production from Western Canada, West Texas and Oklahoma, the Onshore Gulf of Mexico, the Gulf of Mexico Shelf, and the San Juan Basin is approximately 19.3 Tcf per year and currently accounts for 80% of the production in United States and Canada. While production from these regions will still be an important part of the supply portfolio through the next decade, production is forecast to decline in both absolute terms and market share. By 2020, volumes from traditional basins are anticipated to decline over 3 Tcf per year to 16.2 Tcf per year, which will only be 61% of North American production.

Hence, much of the growth of the gas market over the next 20 years must be sustained by development of currently untapped supplies from areas that are generally more remote from the consuming markets in North America. Frontier basins in the arctic, such as Alaska and the Mackenzie Delta, new offshore regions, such as the Gulf of Mexico Slope and Offshore Eastern Canada, and underdeveloped domestic areas such as the Northern Rockies all will be needed to serve U.S. Demand by 2020.

LNG imports must also play a key role. U.S. LNG imports for 2002 totaled 229 Bcf. Imports for 2003 doubled the previous year at 475 Bcf. By 2020, U.S. LNG imports could be over 6,600 Bcf per year, nearly a thirty-fold increase from 2002. LNG is competitive with North American production at prices ranging from \$3.50 to \$4.00 per Mcf depending upon the distance that the LNG travels from the liquefaction plant to the import terminal. Imported LNG, in large part, becomes

an economically viable energy supply because of the low cost of developing and producing abundant stranded gas resource located throughout the world.

A.2.1 North American Resource Development and Production (EEA)

North American natural gas supply is diverse, with gas originating from many different sources and areas. Historically, North America has been self-reliant, and most of its gas supply has come from the U.S. Gulf Coast producing area and from the Western Canadian Sedimentary Basin. Recently, both areas have shown signs of resource depletion, shifting the focus of gas producers to different formations (generally deeper sediments) and to other areas. For example, there has been increased focus on developing gas resource located in the deeper waters of the Gulf of Mexico³, with less emphasis on developing shallow water gas resource where most historical activity has been concentrated. LNG imports are also high on the list of potential new gas supplies for the North American gas market. In short, gas suppliers are looking to new frontiers for future supplies. Given the maturity of the North American gas resource, it is expected that this new focus will continue well into the future.

To date, over 1,300 trillion cubic feet (Tcf) of gas resource has been developed in North America (Table A.1). Cumulative historical production currently stands at almost 1,100 Tcf, or over 80 percent of the total gas resource developed to date. The remainder of developed gas resource that has not yet been produced (otherwise known as proven reserves) is currently 244 Tcf.

The Gulf Coast producing area (both onshore and offshore), the Western Canadian Sedimentary Basin, and the Rockies (Figure A.1) are all net exporters of natural gas within North America. Collectively, these areas account for 71 percent of the proven gas reserves and 77 percent of the current gas production in North America.

The Gulf Coast producing area (both onshore and offshore) accounts for almost 70 Tcf, or about 25 percent of the proven gas reserves in North America. Not surprisingly, the area is also the most prolific production area in North America, accounting for almost 10 Tcf or 40 percent of the current gas production.

The Western Canadian Sedimentary Basin has almost 60 Tcf of proven gas reserves, accounting for slightly over 20 percent of the proven gas reserves in North America. The Western Canadian Sedimentary Basin also accounts for about one-quarter of current North American gas production.

³ Activity has shifted out to water depths greater than 200 meters.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 42 of 250

The Rocky Mountain producing area, which includes many different producing formations and basins, has almost 50 Tcf of proven gas reserves, accounting for just under 20 percent of the proven gas reserves in North America. However, at present, the Rocky Mountains only account for 13 percent of the North American gas production. A significant amount of gas resource developed in the Rocky Mountains has been unconventional⁴ gas that is produced at relatively high R/P ratios⁵. Conversely, Gulf Coast gas resource is mostly conventional gas with much lower R/P ratios and higher decline rates.

In contrast to the areas discussed above, the Eastern Interior is a net importer of gas within North America. The Eastern Interior accounts for only 14 Tcf of gas reserves or 5 percent of the proven reserves in North America. In addition, the region only accounts for just over 3 percent of the current North American gas production. We expect that the Eastern Interior gas markets will continue to rely on gas from other North American regions, primarily the Gulf Coast and Eastern Canada, or LNG imports for future gas supply.

Table A.1 indicates that a significant and widespread resource remains to be developed. In total, the remaining resource could sustain today's level of North American gas production for almost 70 years. However, only the cost-effective portion of this resource base is likely to be developed in the foreseeable future. EEA supply analysis indicates about 700 Tcf of gas⁶ that is economic to develop at Henry Hub gas prices below \$5 per MMBtu⁷. This would indicate that there is an additional 600 Tcf of non-Arctic gas that is uneconomic to develop at sustained gas prices of \$5 per MMBtu.

⁴ Includes coalbed methane, very low permeability formations, and shales.

⁵ R/P ratio – Natural gas reserves / annual production. The average R/P ratio for all North American gas production is just under 10. In contrast, the R/P ratio for Rocky Mountain gas is about 15. The U.S. Energy Information Administration is currently investigating why the R/P ratio for Rocky Mountain gas production is so high. The number may reflect pre-booking of resource that is thought to exist but has not yet been developed, for example, pre-booking of the extensive coalbed methane resource located in Powder River Basin.

⁶ Does not include Canada Arctic and Alaska gas resource.

⁷ The supply curves indicate the amount of gas resource that is economic to develop through 2020 at different gas prices. In reality, it is unlikely that total amounts indicated will be developed because of constraints on drilling activity and capital constraints, among other factors. Hence, the supply curves indicate the maximum amount of resource that is likely to be developed at different gas prices.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 43 of 250

Table A.1
Natural Gas Resource, Reserves, and Production (Tcf)⁸


Source: Energy and Environmental Analysis, Inc.

<i>Region</i>	<i>Cumulative Historical Production</i>	<i>(Plus) Proven Reserves</i>	<i>(Equals) Developed Resource</i>	<i>(Plus) Estimated Remaining Resource</i>	<i>(Equals) Total Resource</i>	<i>Estimated Production in 2002</i>
Alaska	10.8	8.8	19.6	321.8	341.4	0.4
West Coast Onshore	31.9	2.6	34.5	32.6	67.1	0.3
Great Basin	1.4	1.0	2.4	4.0	6.4	0.1
Rockies	67.1	49.7	116.8	213.3	330.2	3.4
West Texas	105.4	16.4	121.8	54.2	176.0	1.7
Gulf Coast Onshore	321.5	37.5	359.0	176.5	535.5	4.9
Mid-continent	179.9	24.0	203.9	72.6	276.5	2.2
Eastern Interior	54.9	13.7	68.6	122.1	190.7	0.9
Gulf of Mexico	163.1	29.2	192.3	316.0	508.3	4.9
U.S. Pacific Offshore	2.6	0.6	3.2	1.2	4.4	0.0
WCSB	126.0	57.5	183.5	206.5	390.0	6.4
Arctic Canada	0.1	0.0	0.1	73.9	74.0	0.0
Eastern Canada Onshore	1.1	0.4	1.5	7.2	8.7	0.0
Eastern Canada Offshore	0.3	2.2	2.5	96.1	98.6	0.2
Western British Columbia	0.0	0.0	0.0	11.5	11.5	0.0
North America Total	1,066.0	243.5	1,309.7	1,709.5	3,019.1	25.4

⁸ Unless otherwise stated, values are dry gas at the end of 2001. Resource values represent accessible and technically recoverable resource through 2020 with advancement of E&P technologies consistent with recent improvements. Does not include an estimated 180 Tcf of resource not currently accessible.

Figure A.1
North American Production Areas

Source: U.S. National Petroleum Council

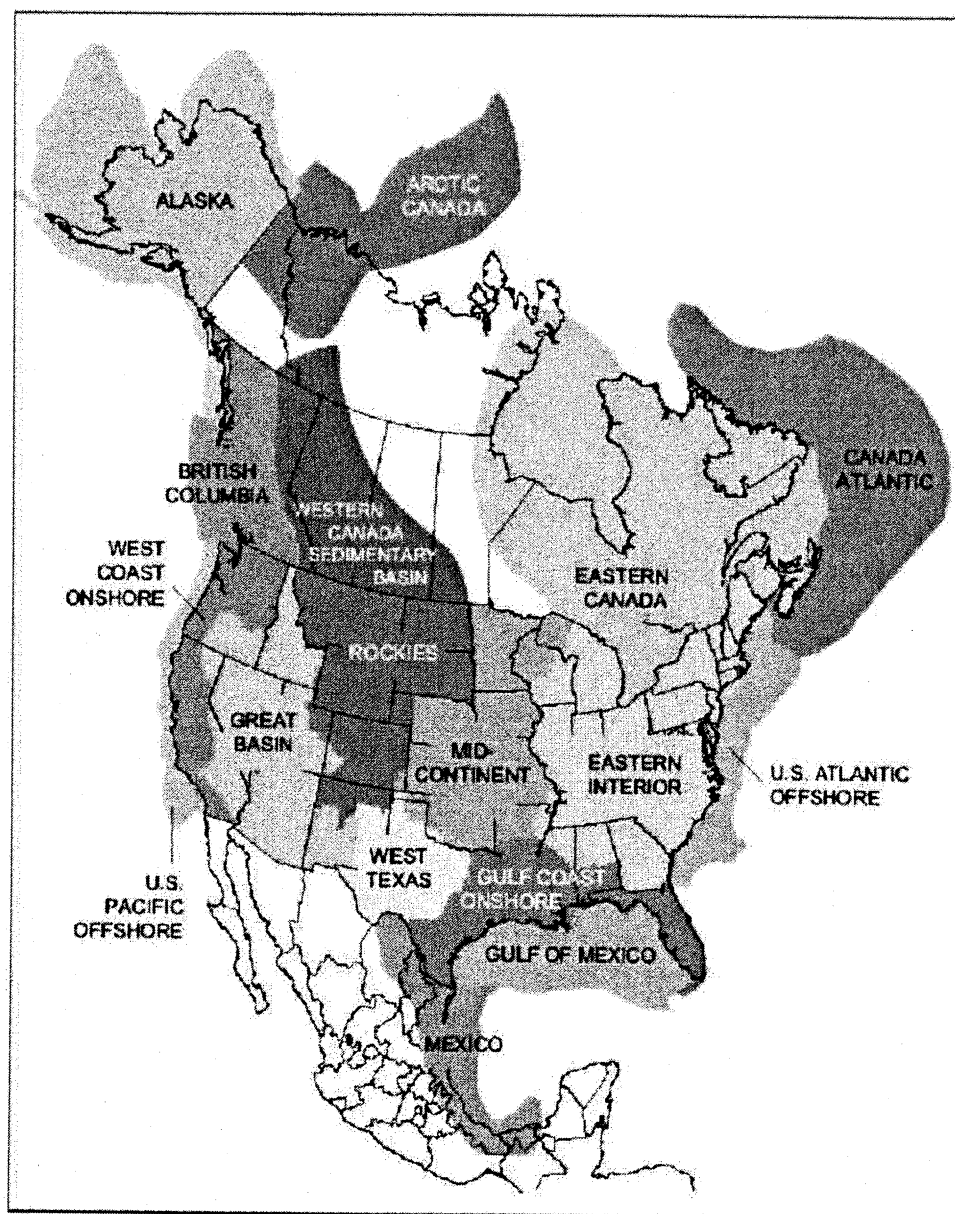

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 45 of 250


Natural gas supply from multiple sources will have to grow to meet the projected 30 Tcf U.S. market by the end of the next decade. Most industry analysts, including EEA, believe that U.S. and Canadian natural gas production from traditional basins is in decline (Figure A.2). Production from Western Canada, West Texas and Oklahoma, the Onshore Gulf of Mexico, the Gulf of Mexico Shelf, and the San Juan Basin is approximately 19.7 Tcf per year and currently accounts for 80% of the production in North America (Figure A.3). While production from these regions will still be an important part of the supply portfolio through the next decade, production is forecasted to decline in both absolute terms and market share. By 2020, volumes from traditional basins are anticipated to decline over 3 Tcf per year to 16.2 Tcf per year, which will only be 61% of North American production (Figure A.4).

The declines in production from traditional supply sources are mainly due to the lack of high quality drilling prospects in the areas. Already, the North American gas market is experiencing declines in some basins. Gas producers have had to work harder to develop additional deliverability. Producers are working harder in mature areas, but are developing less productive gas resources. Whether it is due to increased decline rates, lower reserves, or a higher percentage of nonconventional wells (tight sands, coal bed methane, or shale), it appears that more wells are needed just to maintain the current rate of production.

In order for production to be maintained as fields naturally deplete, more expensive formations must be completed. The wells may be in deeper formations that have higher temperatures and pressures or the gas may be sour (containing sulfur) and more corrosive, requiring additional processing. Less permeable formations may be drilled. Such wells need to be fractured downhole⁹ in order to be produced economically. In general, most of the large natural gas reservoirs have been found. Future fields will be smaller and need to be more numerous to maintain the same amount of production.


⁹ "Fracturing down hole" is the process of breaking the rock in the producing reservoir of the well in order to increase the rate of production.

Figure A.2
North American Natural Gas Production by Region

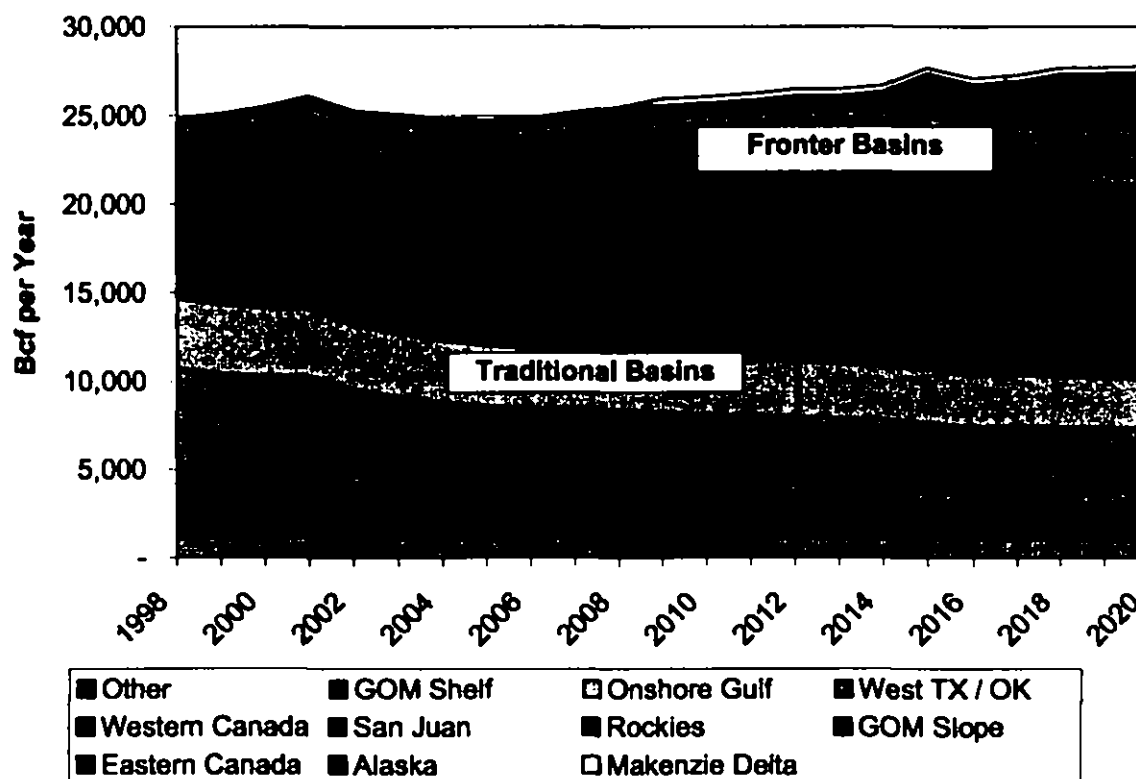


North American production including gas produced and consumed in Canada but excludes Mexico

Figure A.3
2003 North American
Natural Gas Production by Region

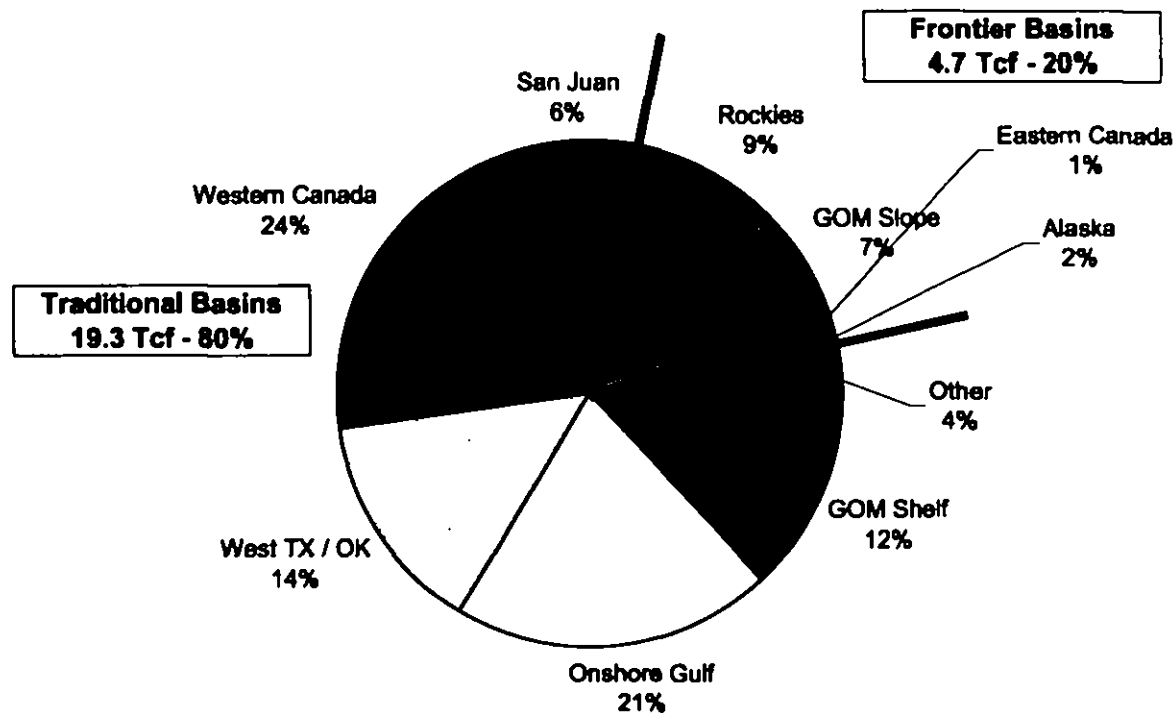

Hence, much of the growth of the gas market over the next 20 years must be sustained by development of currently untapped supplies from areas that are generally more remote from the consuming markets in North America. LNG imports will also play a key role (see next section). Frontier basins in the arctic, such as Alaska and the Mackenzie Delta, new offshore regions, such as the Gulf of Mexico Slope and Offshore Eastern Canada, and underdeveloped domestic areas such as the Northern Rockies all will be needed to serve U.S. Demand by 2020. To bring gas from the new supply regions, pipeline infrastructure will have to be built.

Figure A.4
2020 North American
Natural Gas Production by Region

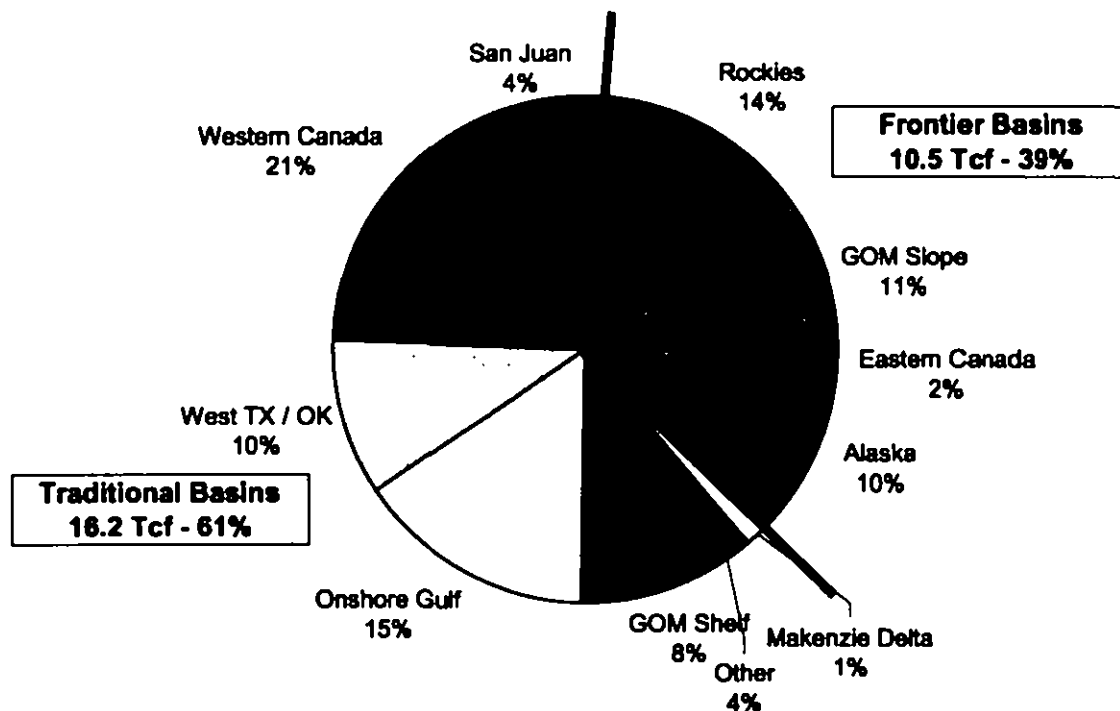

Current supplies from "frontier" basins are 4.7 Tcf per year and account for 20% of North American natural gas production (Figure A.3). By 2020 the volumes could more than double to 10.5 Tcf per year and account for nearly 40% of North American production. (Figure A.4). The 2004 EEA Base Case specifically includes:

- 3.1 Tcf per year of gas production from the deeper waters¹⁰ in the Gulf of Mexico. Deepwater gas production will grow to 11 percent of North American gas production by 2020.
- 3.9 Tcf per year of gas production from the Rocky Mountains (excluding the San Juan Basin). Rocky Mountain gas production will grow to over 14 percent of North American gas production by 2020. Much of the increase in production is driven by development of unconventional sources such as coal bed methane.

¹⁰ Production from water depths exceeding 200 meters.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 49 of 250

- 2.7 Tcf per year of Alaska gas production, 2.2 Tcf of which flows south to Canada and the Lower-48. Alaska gas production will account for 10 percent of North American gas supply by 2020.
- 0.4 Tcf per year of MacKenzie Delta gas production, most of which may remain in Western Canada for oil shales development.
- 0.5 Tcf per year of Eastern Canada offshore gas production, most of which will satisfy growth in gas demand in the Northeast U.S. Eastern Canada offshore production will grow to almost 2 percent of North American gas supply by 2020.


Although actual amounts and timing of production from frontier basins will vary from the EEA Base case, most analysts agree that supplies from such regions will be significant by the end of the next decade.

A.2.2 LNG Imports (EEA)

In addition to the need for gas production from more remote locations, the EEA base projection relies on an order-of-magnitude increase in LNG imports to meet the requirements of the U.S. market. U.S. LNG imports for 2002 totaled 229 Bcf. Imports for 2003 doubled the previous year at 475 Bcf. By 2020, U.S. LNG imports could be over 6,600 Bcf per year, nearly a thirty-fold increase from 2002. Figure A.5 presents the forecast of the amount and location of imports and exports of LNG assumed in the study. Currently, there are four operating LNG import terminals in North America.¹¹ In order to attain the level of LNG imports assumed in the EEA Base Case, approximately 10 additional terminals will need to be constructed.

¹¹ In addition to the four import terminals, there are more than 100 LNG peak shaving facilities that are used principally by local distribution companies to meet peak day demand.

Figure A.1
U.S. LNG Imports (Bcf / Year)

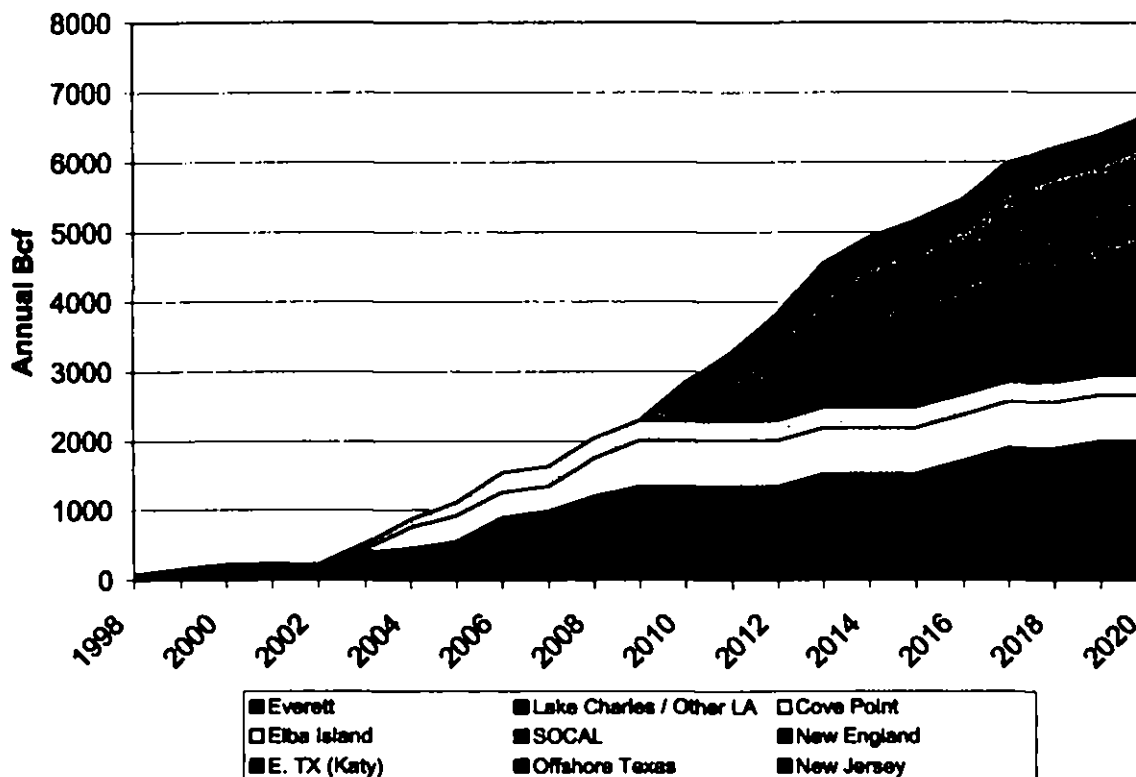

LNG deliveries compete with wellhead production. LNG is competitive with North American production at prices ranging from \$3.50 to \$4.00 per Mcf depending upon the distance that the LNG travels from the liquefaction plant to the import terminal. Imported LNG, in large part, becomes an economically viable energy supply because of the low cost of developing and producing abundant stranded gas resource located throughout the world. Most of the gas may be developed and produced at costs under \$1 per MMBtu at the wellhead, but the additional costs of liquefaction, tankering, and regasification are significant. Hence, the delivered cost of LNG imports are high, making LNG one of the most expensive Sources of new supply on a unit basis. Unlike domestic or Canadian supplies, the U.S. must compete with the rest of the world for LNG. World market conditions influence LNG prices.

In addition to expansion plans at the existing four import terminals, there are nearly 40 new LNG terminals proposed for North America. Obviously not all of them will be built. Actual locations for new terminals will not only be based on economic factors such as proximity to consuming markets but also political factors of permitting and siting. There is significant value in siting LNG terminal

facilities in "market area" locations that are downstream of pipeline constraints such as the Northeast U.S. However such locations may have limited pipeline access or face additional hurdles in permitting. Terminals along the Gulf of Mexico will have access to a more extensive pipeline network but may receive a lower price for their natural gas supplies. In the end, a mix of supply area and market area terminals will most likely be built. Of the four existing terminals, 3 are on the East Coast, Everett, Cove Point, and Elba Island; While Lake Charles is located along the Gulf of Mexico. The EEA Base case assumes 2 additional East Coast terminals, 7 Gulf Coast terminals and 1 terminal on the West Coast.

A.2.3 Imports and Exports from Mexico (EEA)

Exports to Mexico have increased from a little over 100 MMcfd in 1998 to over 1 bcfd in 2003. Growth in gas demand in Mexico, driven substantially by increased gas requirements for power generation, has exceeded growth in supply. Consequently, Mexico has needed to import increasing quantities of gas from the United States over the past five years.

Mexico has a significant gas resource base of its own. However, much of the resource base is in Southern Mexico and would require the development of pipeline infrastructure to bring the gas to the market regions just south of the U.S. border. A considerable amount of gas is contained in the Burgos region across the Texas border. The EEA forecast used in the INGAA Foundation analysis assumes that development of the Indigenous gas resource in North Mexico is used to stabilize the level of required imports from the North by the end of the decade.

In addition, the projection anticipates the construction of two LNG terminals, one on the East Coast in Altimira, and one on the West Coast in Baja California. Both would supplement Mexico's domestic production reducing the need for imports by 585 Bcf per year after 2006. Excess imports of LNG on the West Coast of Mexico provides for net exports to the U.S. on the order of 185 Bcf per year.

A.3 LNG Supply Sources and Characteristics

Global LNG supply comes from a variety of sources, is not homogeneous, and has heating value contents that vary widely. The interchangeability of LNG is an important issue to consider, as the composition of imported LNG can be different from that of current domestic pipeline gas. That difference is not because the composition of the gas produced in North America differs from natural gas in other parts of the world, but is more of a result of the rise of the ethane-based petrochemical industry. As the petrochemical and natural gas liquids (NGL)

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 52 of 250

industries developed in the United States, the typical heating values of the "natural gas" being delivered to the interstate pipeline and end-use markets decreased markedly due to increased recovery of ethane, propane and butane, that were then sold as separate products. As the U.S. gas infrastructure developed and matured, the system delivered leaner pipeline gas (gas with less heavy hydrocarbon constituents and lower heating value). In most other regions of the world, natural gas is not subjected to such high levels of ethane and propane extraction, resulting in higher heating values for pipeline gas.

LNG production plants are usually located in remote areas with limited or no local ethane markets. Thus few LNG production plants extract ethane from its feed. Propane and butane, on the other hand, are extracted at varying levels based on the economic value of those products at the specific LNG plants. As a consequence, most LNG contains more ethane, propane, and butane than U.S. domestic pipeline gas. Furthermore, LNG contains virtually no carbon dioxide and little or no nitrogen, both of which are commonly present in domestic natural gas.

The presence of hydrocarbons heavier than methane (ethane and propane) and low levels of non-hydrocarbons result in most LNG supplies having a gross heating value between 1,100 and 1,150 Btu per cubic foot or about 10% higher than that of typical U.S. domestic pipeline gas.

Many of the U.S. gas pipelines have heating value specifications that serve to protect the pipelines and the markets they supplied from the presence of liquid hydrocarbons in a distribution system designed to handle a gas-only stream. It should be understood and appreciated that LNG contains negligible quantities of pentanes and heavier, which are the natural gas components most likely to create a liquid phase in a pipeline. LNG has generally no more than 0.1% of pentane-plus because, if present in greater quantities, these compounds will freeze in the liquefaction process and plug the heat transfer equipment in the coldest parts of the plant.

Technically it is possible to produce lean LNG with a lower heating value, but at a cost. Those costs will vary at each production plant. Costs will be high for LNG plants with significant existing production capacity that have historically been targeted for markets requiring high heating value LNG. These facilities will require separate fractionation, liquefaction, and LNG storage to be built to be able to produce lean LNG as well as rich LNG. Costs may also increase if the gas supply contains a significant amount of ethane. If the ethane cannot be left in the LNG or blended into the rich LNG product, then, due to lack of a local ethane market, it will have to be sold as a waste product. Those costs can be significant, making supply of a lean LNG economically unattractive for most of

the existing LNG producers. Tight specifications on maximum heating value for the U.S. market may significantly limit the LNG supply options.

Some liquefaction facilities, such as Atlantic LNG in Trinidad and Tobago and Nigeria LNG, have installed liquifiable extraction facilities that remove significant portions of ethane and heavier components as part of the production process. The resulting LNG is similar in heating value to U.S. pipeline gas.

A.3.1 Atlantic Basin Sources

Atlantic Basin exporters produced 1.5 Tcf (32 million tons) in 2002, about 29 percent of total world LNG production. As of late 2003, Atlantic Basin LNG producers had 2.1 Tcf (43 million tons) of annual capacity. Expansions in Nigeria and Trinidad and Tobago, as well as new facilities in Egypt and Norway, would increase annual Atlantic Basin liquefaction capacity to 3.3 Tcf (73 million tons) by 2007.

Algeria was the second largest LNG exporter in 2002, shipping 935 Bcf (19.6 million tons) mainly to Europe (France, Belgium, Spain, and Turkey) and the United States. A major renovation in 1999 raised the country's LNG production capacity to more than 1.1 Tcf (23.1 million tons) per year. Algeria also exports more than 1.0 Tcf of natural gas per year to Europe by pipeline. The Algerian State-owned oil and gas company Sonatrach owns and operates four liquefaction complexes, the first of which started up in 1964, making Algeria the world's first LNG exporter. Algeria has no new liquefaction capacity planned before 2008 but in the long term is planning to add another train. Nigeria exported 394 Bcf (8.2 million tons) of LNG in 2002, mainly to Turkey, Italy, France, Portugal, and Spain.

Nigeria has also delivered more than 20 cargos under short-term contracts to the United States over the past three years. The total annual capacity of Nigeria's Bonny Island LNG plant is 463 Bcf (9.5 million tons), and Nigeria LNG has begun construction of two additional 200-Bcf-per-year (4.1-million-tpy) trains that are scheduled to begin operation in 2005. Additional trains are under discussion as are three new projects that have been considered in the West Niger Delta (by ExxonMobil, ChevronTexaco, and ConocoPhillips), Brass River (by the Italian company ENI and ConocoPhillips), and a floating offshore project (by Statoil and Total).

Trinidad and Tobago exported 189 Bcf (4.0 million tons) of LNG in 2002. Trinidad and Tobago's LNG facility at Point Fortin has three trains and an annual capacity of 482 Bcf (9.9 million tons). In June 2003, the Government of Trinidad and Tobago approved the construction of a fourth train that could produce an

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 54 of 250

additional 253 Bcf (5.2 million tons) per year. Trinidad and Tobago exports LNG to the continental United States, Puerto Rico, Spain, and the Dominican Republic.

Libya exported 21 Bcf (0.4 million tons) of LNG in 2002. The plant at Marsa El Brega has an annual capacity of about 131 Bcf (2.7 million tons). Only about 25 percent of the total capacity, or 29 Bcf (0.6 million tons) per year, is available for export due to maintenance issues.

Two LNG export projects are being built in **Egypt**: a one-train liquefaction facility at Damietta, which will start operations in 2004 with an annual capacity of 244 Bcf (5.0 million tons), and a two-train project at Idku with a 2005 startup date and a projected annual capacity of 175 Bcf (3.6 million tons). All of the Idku LNG is contracted to Gaz de France. Commitment to a second 175-Bcf-per-year (3.6-million-tpy) train was announced in September 2003. British Gas (BG) has agreed to buy the entire output for U.S. and Italian markets.

Beginning in 2006, **Norway** plans to export LNG from a 200-Bcf-per-year (4.1-million-tpy) liquefaction terminal now being built on Melkøye Island in the Norwegian Sea. Exports are targeting markets in Spain, France, and the United States.

A.3.2 Middle Eastern Sources

Exporters from the Middle East produced 1.2 Tcf (25 million tons) in 2002, about 23 percent of total world LNG production. As of late 2003, the three Middle Eastern exporters had 1.4 Tcf (29 million tons) of annual capacity. Expansions to facilities in Qatar and Oman will add 619 Bcf (13 million tons) of annual liquefaction capacity, increasing Middle East capacity to 2.0 Tcf (42 million tons) per year by 2007.

Qatar ranks fourth in world LNG exports and has an annual capacity of 726 Bcf (14.9 million tons) from two liquefaction plants owned by the Qatargas and Ras Laffan LNG (RasGas) consortia. The Qatargas plant is being debottlenecked, and two more trains are being added to the RasGas facility, which would add 458 Bcf (9.4 million tons) of annual capacity by 2005. Most of Qatar's exports go to customers in Japan and South Korea, but short-term cargos have also been shipped to the United States and Europe. Its enormous natural gas reserves and low upstream production costs give Qatar the potential to significantly expand its LNG exports to a targeted annual capacity of 2.9 Tcf (60 million tons) by 2015.

Oman has one LNG export terminal, which began operation in 2000 with two liquefaction trains and an annual capacity of 356 Bcf (7.3 million tons). Most of the LNG is sold to South Korea's Kogas. Smaller volumes are shipped to

customers in Japan, the United States, and Europe. A planned third train would add 161 Bcf (3.3 million tons) per year in 2006. Further expansion potential for LNG exports from Oman is limited by the modest size of the country's reserves.

The United Arab Emirates (UAE) has the world's fifth largest natural gas reserves and ranks ninth in LNG exports. Abu Dhabi Gas Liquefaction Co. operates the nation's only export facility with a capacity of 278 Bcf (5.7 million tons). Roughly 90 percent of UAE LNG production is exported to Japan. Despite its large reserves, the UAE is unlikely to expand its production of LNG since it uses much of the gas for domestic purposes.

A.3.3 Pacific Basin Sources

Pacific Basin LNG exporters produced 2.6 Tcf (55 million tons) in 2002, about 49 percent of total world LNG production. As of late 2003, five Pacific Basin exporters had 3.1 Tcf (63 million tons) of annual liquefaction capacity. Liquefaction capacity in the Pacific Basin is expected to increase by 780 billion cubic feet (Bcf) or 16 million tons of annual capacity over the next few years to more than 3.8 Tcf (80 million tons) per year by 2007.

Indonesia is the world's largest LNG producer and exporter. In 2002, Indonesia exported 1.1 Tcf (23 million tons) of LNG or 21 percent of the world's total LNG exports. Most of Indonesia's LNG is imported by Japan with smaller volumes going to Taiwan and South Korea. Indonesia's annual liquefaction capacity is 1.4 Tcf (30 million tons) from the two exporting complexes at Bontang and Arun. An additional train at Bontang is under consideration but has yet to contract for the capacity. BP is leading development of a two-train, 341-Bcf-per-year (7.0-million-tpy) project at Tangguh scheduled to start up in 2007. The Tangguh LNG is destined for China, other Asian markets, and potentially the United States.

Malaysia, the world's third largest LNG exporter after Indonesia and Algeria, exported 741 Bcf (15.6 million tons) in 2002. These exports went primarily to Japan, with smaller volumes to Taiwan and South Korea. Three liquefaction terminals have been developed at the Bintulu LNG complex in Sarawak, Malaysia Satu, Dua, and Malaysia Tiga, the first train of which went on-stream in mid-2003. A second train will come online in November 2003, raising the total capacity of the Bintulu complex to an annual 1.1 Tcf (22.7 million tons).

Australia exported 367 Bcf (7.7 million tons) of LNG from the Northwest Shelf project in 2002, primarily to Japanese utilities. The project owners have started construction on an additional 205-Bcf-per-year (4.2-million-tpy) train scheduled to come online in 2004. An additional train is under consideration. Three new projects are also in various stages of development. Conoco Phillips has begun

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 56 of 250

construction on a 175-Bcf-per-year (3.6-million-tpy) Darwin LNG project, to monetize reserves in the Timor Sea shared by Australia and East Timor. ConocoPhillips is also working with Shell, Osaka Gas, and Woodside Petroleum to develop the 258-Bcf-per-year (5.3-million-tpy) Greater Sunrise project via a floating LNG facility. ChevronTexaco, in partnership with ExxonMobil and Shell, is spearheading a two-train Gorgon project with an annual capacity of 487 Bcf (10.0 million tons) to monetize reserves discovered offshore Northwest Australia.

Brunei Darussalam has a two-train liquefaction terminal at Lumut with an annual capacity of 351 Bcf (7.2 million tons). About 90 percent of its output goes to customers in Japan and the remaining 10 percent to South Korea.

The **United States** has a 68-Bcf-per-year (1.4-million-tpy) liquefaction terminal at **Kenai, Alaska**, that has been exporting LNG to Japan for more than 30 years. There are currently no plans to expand this facility.

Russia's first LNG plant is under construction on Sakhalin Island off Russia's east coast. The two-train facility will have an annual capacity of 466 Bcf (9.6 million tons), with exports of 234 Bcf (4.8 million tons) per year from the first train scheduled to begin in 2007. The partners have already secured sales contracts with three Japanese utilities for 136 Bcf (2.8 million tons) per year over 20 years. There are reports that Russian officials have also expressed interest in exporting LNG from the giant Shtokman field in the Barents Sea to the United States and elsewhere.

A.3.4 New Sources of LNG

At least seven additional countries are exploring their potential as LNG exporters.

Pacific Basin. A project is proposed for exporting natural gas from Peru's Camisea field to a terminal in Mexico. Several European and U.S. companies are proposing a project to pipe gas from Bolivia to either Peru or Chile on the Pacific Coast where it could be liquefied and shipped to a terminal on the West Coast of North America.

Middle East. With the world's second largest proved gas reserves, Iran has great potential to export gas to markets in Europe, Asia, and India by pipeline and as LNG. The Iranian government is considering at least four projects, each of 390 to 490 Bcf (8 to 10 million tons) per year, to process reserves in the South ParsNorth field in partnership with companies in Europe and Asia.

An LNG project has been proposed in Yemen for more than a decade but to date has not made significant progress.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 57 of 250

Atlantic Basin. In Venezuela, an LNG project has been discussed since the early 1970s. Shell and Mitsubishi have signed preliminary agreements to develop a 229-Bcf-per-year (4.7-million-tpy) project called Marisal Sucre based on offshore reserves. Discussions have been held with neighboring Trinidad and Tobago to bring Venezuelan gas to their Atlantic LNG plant for processing until a Venezuelan LNG plant can be built.

In Angola, ChevronTexaco, ExxonMobil, BP, Total, and Sonangol are proposing to build a plant based on offshore associated gas for export to North American and European markets. The plant would initially have a single 195-Bcf-per-year (4.0-million-tpy) train with the option for development of additional trains later.

Equatorial Guinea is looking to export LNG from its offshore Alba field. In May 2003, U.S.-based firm Marathon Oil signed a 17-year draft agreement to supply British Gas with 166 Bcf (3.4 million tons) per year of LNG to be delivered to the Lake Charles regasification facility in the United States. The project is currently undergoing advanced engineering feasibility studies, and a final investment decision is due in the first quarter of 2004.

A.4 U. S. Domestic Supply Characteristics

A.4.1 1992 GRI Study

U. S. domestic supply gas quality characteristics were reported on in an GRI study in 1992 entitled "Variability of Natural Gas Composition in Select Major Metropolitan Areas of the United States". Gas supply compositions within the U. S. vary by region depending on demand, available supply, the degree of processing and pipeline blending. The 1992 GRI survey of gas supplies included gas composition data for over 6,800 samples from 26 cities in the United States. The absolute minimum and maximum Wobbe numbers in the data were 1201 and 1418, respectively. Most of the data showed a narrow range of Wobbe numbers, with tenth and ninetieth percentile levels of 1331 and 1357, respectively. The team found that the historical range of gas compositions reported in the 1992 survey has been successfully utilized; more recent gas composition data is currently being collected. However, it is critical to recognize that not all gases within the absolute range are interchangeable with each other. The range of interchangeability for a given region is generally tighter than the variation between regions of the country. Other Work Group findings from this study include:

- The 1990-91 data in the 1992 study, absent of other data of similar breadth, represents a reasonable snapshot of U. S. historical gas supply

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 58 of 250

to LDC city gates over relevant historical period for interchangeability considerations.

- Such historical data represents gas supply under which the current stock of appliances and other end use equipment were installed and adjusted for combustion characteristics.
- Deviations in gas supply from these historical characteristics must be, themselves, considered in the context of interchangeability compared with this historical baseline or "adjustment gases" for the stock of appliances and end use equipment installed at the time.

Given this historical perspective, the Work Group found a need to describe more recent gas compositions in the U. S. gas system in order to:

- Characterize current supplies in light of historical conditions, and
- Identify interchangeability issues suggested by any trends away from historical supply compositions.

A.4.2 2004 Analysis by the NGC Work Groups

The NGC Work Groups initiated work in September 2004 to gather gas quality information from AGA member companies and pipeline companies for the periods 1995/1996 and 2002/2003 in order to allow the Work Group to base its interchangeability recommendations on contemporary domestic gas quality data. Data was generally provided for the periods September 1995 through August 1996 and September 2002 through August 2003. Since parallel work was being done by the NGC Liquid Dropout Work Group, data was collected that would benefit both work groups.

Data collected contained the following types of information:

- Company
- Location
- State
- Date
- Gas Volume (mcf)
- Gas Temperature (F),

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 59 of 250

- BTU content
- Specific Gravity
- Wobbe
- C1 to C6, C6+, Nitrogen, and CO2 mole percent composition

Twenty-three (23) companies supplied data sets. Not all data sets submitted contained gas composition. Those without gas composition were only used to for Wobbe and related interchangeability purposes. Figures A.6 and A.7 at the end of this section show the number of records used in the liquid dropout and interchangeability analyses by State and time period.

Total records available by time period and application are summarized in this table:

Application	0203 Period	9596 Period	Total
Interchangeability	705810	870	706680
Liquid dropout	17335	629	17964
Total by Period	723145	1499	724644

After receipt of the data, the following procedure was used to prepare the data for further analysis by the appropriate work groups:

- Load the data into an Access database.
- Review data and eliminate/correct data that was obviously incorrect.
- Calculate SG, Wobbe, C4+ and other parameters of interest for interchangeability for all records if not already supplied with the data. Verify the values for these parameters if they were supplied in the data set.
- Extend C6+ to C6, C7, C8 using a 0.47/0.36/0.17 split for all data records supplied with composition data.
- Extract the maximum/minimum liquid dropout data for any location by time period (95/96 or 02/03) by taking the record with the maximum/minimum C6+ value for that location and time period for cricondenthem determination.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 60 of 250

- Maximum and minimum values for Wobbe were determined based on the Wobbe values in the data.
- Calculate and extract the average value data by location and time period (95/96 or 02/03) by taking the volume weighted (if volume available) or arithmetic average (if volume unavailable) of the record data elements (e.g. C1, C2, Wobbe, etc.) for each location and time period.
- Return the average, maximum, and minimum results by location and time period to an Excel spreadsheet for review by the appropriate work group. Use composition data to calculate a phase envelope using a Peng-Robinson equation of state simulator to determine the cricondentherm.

Figures A.6 to A.12 below show the results of the analysis as used by the Interchangeability Work Group. Figures A.8 and A.9 show Wobbe data by state for the 0203 and 9596 time periods. These figures show the weighted average, median, and range of data (maximum and minimum as indicated by the blue bars) for the respective time periods by state. Figure A.8 also contains the 9596 median data for comparison purposes. Figure A.10 is a histogram of the 0203 data and shows the percent and cumulative percent of total by Wobbe range for the data. Figures A.11 and A.12 show the data segregated into subgroups representing LDCs and pipelines, respectively. These figures show the data in the same format as Figures A.8 and A.9.

Review of the figures and underlying data indicates the following:

- The Work Group collected data from the 1995-96 and 2002-03 time periods in an attempt to discover any trends in domestic gas quality during those periods. However, it appears the industry does not now systemically retain historical gas quality data so almost all data obtained is for the 2002-03 time period.
- The complete Wobbe dataset for 2002-03 shows similar average, maximum, and minimum values whether taken as a whole or separated into LDC and Pipeline groups. The table below shows this data as well as similar data from the 1992 GRI study:

Group	Average	Maximum	Minimum
All data	1336	1432	1206
LDC data	1337	1408	1210
Pipeline data	1336	1432	1206
1992 GRI Study	1345	1418	1201

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 61 of 250

- Figures A.6, A.7, A.8, and A.9 clearly show variability among states in the range of Wobbe number. This is particularly true in producing states where the average range (difference between maximum and minimum) in Wobbe in 2002-03 was 127 compared to non-producing states with an average range in Wobbe of 61.
- Review of Figure A.10 shows that 90% of the 0203 data has a Wobbe less than 1349 and 99.7% of the data has a Wobbe less than 1400.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 62 of 250

Figure A.6


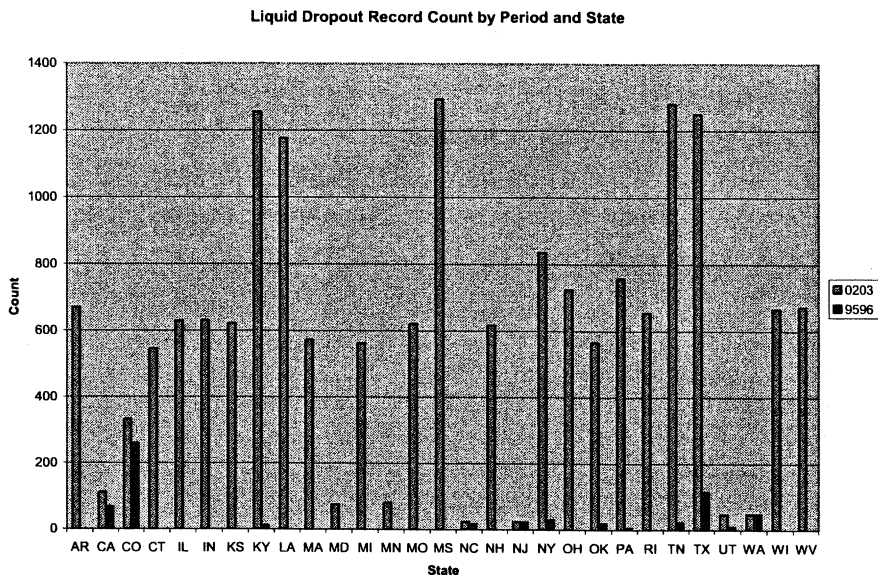


Figure A.7

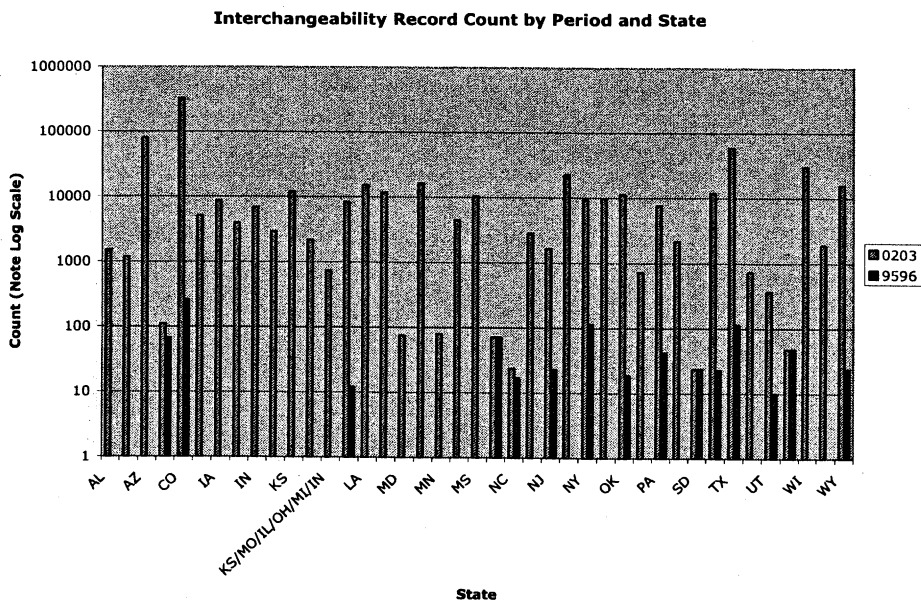

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 63 of 250

Figure A.8


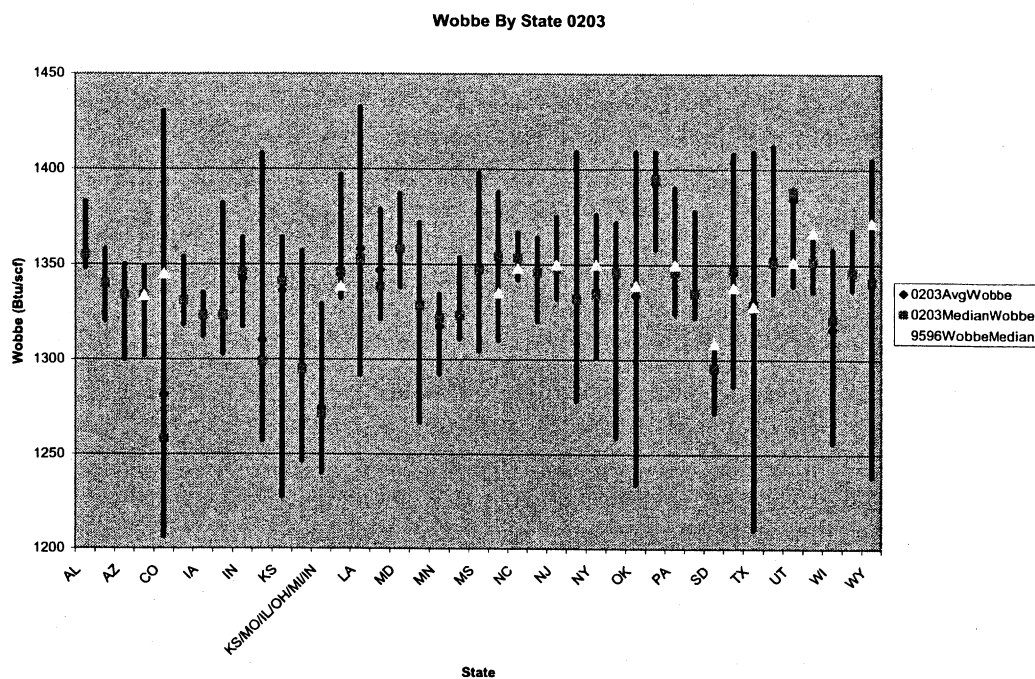


Figure A.9

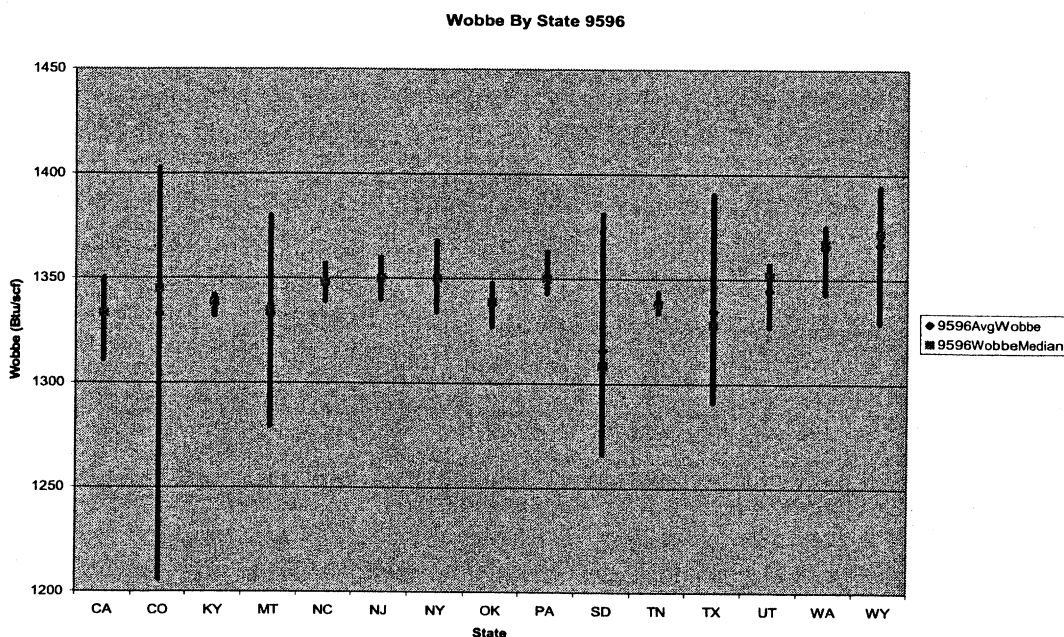

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 64 of 250

Figure A.10


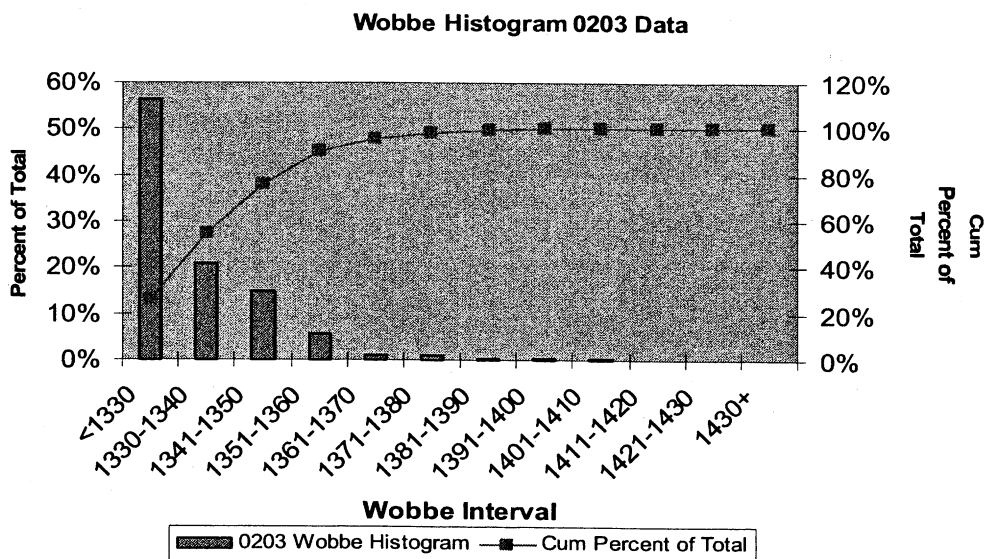



Figure A.11

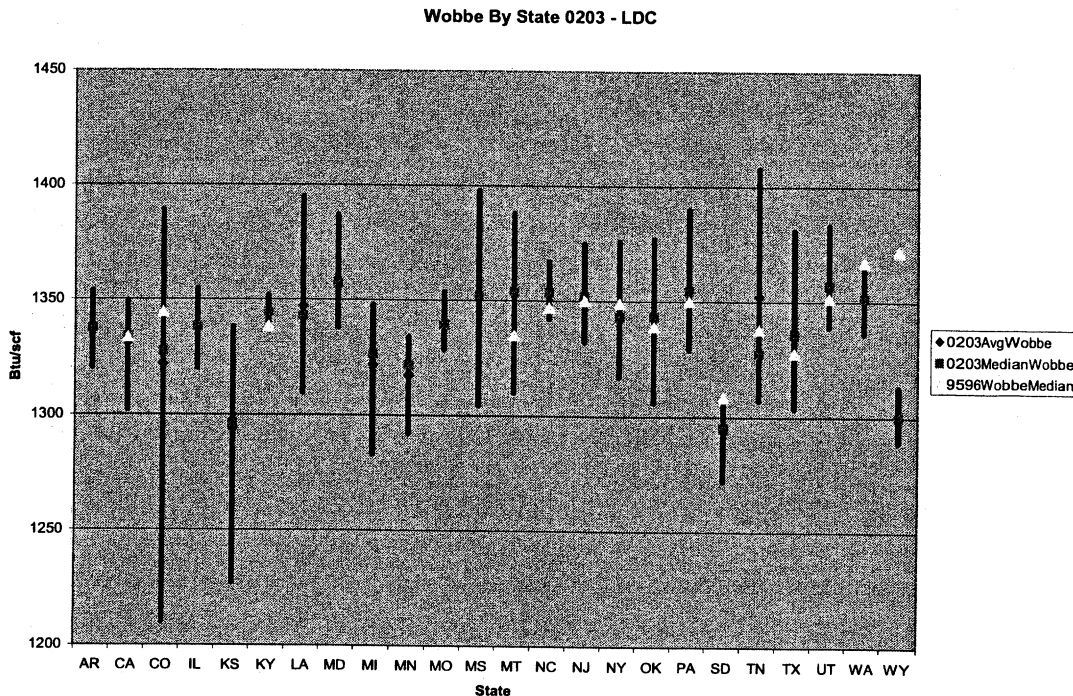

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 65 of 250

Figure A.12

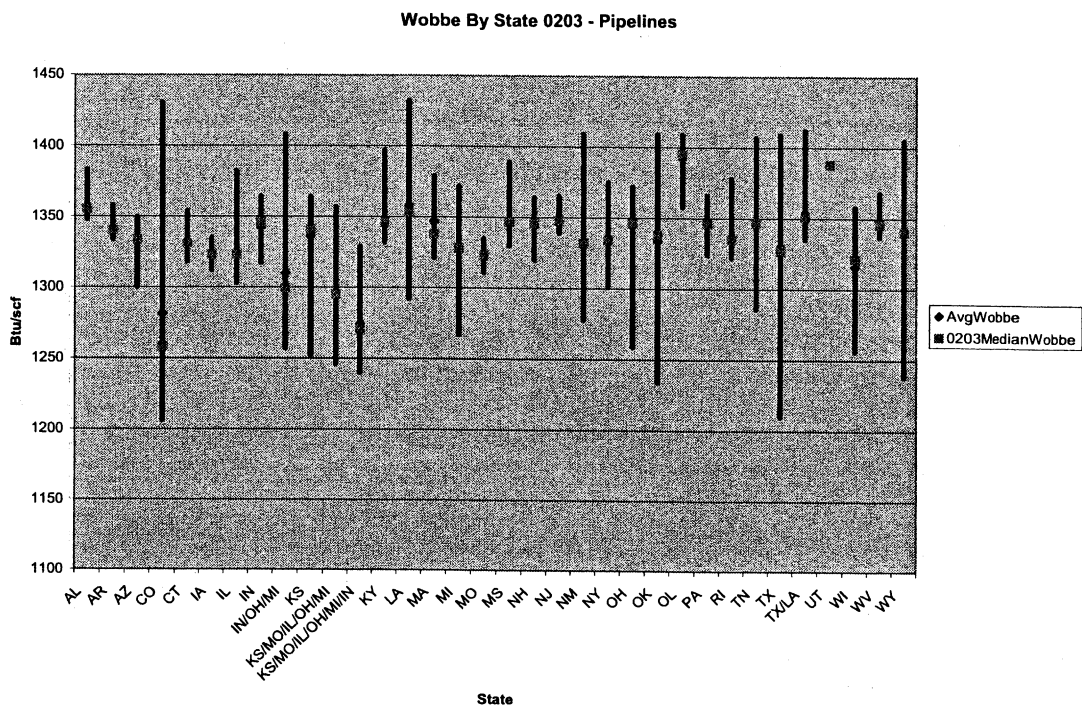

200506305008 Received FERC OSEC 06/30/2005 10:43:00 AM Docket# PL04-3-000

**White Paper on Natural Gas Interchangeability
And Non-Combustion End Use**

**Exhibit No. FGT-6
Page 66 of 250**

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 67 of 250

Appendix B

Impact of Changing Supply on Natural Gas Infrastructure

Terry Boss, INGAA
Bob Wilson, Keyspan

B.1 Chronology of the Development of the Natural Gas Transportation System

The original natural gas pipeline infrastructure was individual "town gas" systems that utilized gas made from coal with low heating values (≈ 600 -700 BTU). This manufactured gas usually had larger quantities of carbon monoxide and carbon dioxide than natural gas produced from production wells. The initial building of long distance transmission pipelines from wellheads in producing states to market regions in the late 1920s permitted the gradual switchover in market areas previously served by town gas facilities to produced natural gas (≈ 970 - 1050 BTU). The particular mixture of produced natural gas transported in these pipelines was a function of the supply coming from the regional basins that served that particular market. As the natural gas market grew, additional supplies were needed and in some cases, additional pipelines were built to connect these growing markets to other supply regions resulting in a more diverse supply mix. To satisfy additional market peaking needs, storage fields were developed where gas was stored seasonally. In other cases, indigenous gas was liquefied (LNG) at market locations and subsequently re-gasified. Propane-air injection facilities were also installed at these market locations to handle peak usage periods. In rare circumstances, new sources of gas were provided by processing naphtha and coal. In some areas, gas was derived from biological digestion techniques (i.e. landfills, manure) and these sources were connected to the pipeline grid in the 1970's and later.

Almost all natural gas delivered to the interstate natural gas market was purchased at the wholesale level by natural gas pipeline companies during the mid 30's to the mid 80's and those companies controlled the quality and interchangeability of the gas delivered to the market through gas purchase contracts. These gas purchase contracts contained specifications that defined the acceptable range of inert gases, hydrocarbon liquids, water vapor and other contaminants in purchased natural gas. In some cases, these gas purchase contract specifications varied because of the particular characteristics of the supply basin that the natural gas was purchased and the competitive market. In other cases, during high market growth periods, pipeline companies would build and operate processing facilities in order to attract new supplies. Regulatory

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 68 of 250

policy encouraged the purchase of sufficient gas supplies to build up reserves; hence there was a lot of flexibility on what gas to schedule for particular market conditions. The overall mixture of gas supply that was scheduled and hence the quality that was delivered to the market place was controlled by the pipeline, since they controlled the gas contracts and the scheduling of different sources of supply. This mixing of gas was described by the term "blending".

In the 1980's the Federal Energy Commission began a restructuring of the interstate natural gas pipeline companies. Under Order 436 and 636 pipeline were instructed to abrogate gas purchase contracts and concentrate on the transportation of gas. In many cases, pipeline companies divested many of the gathering systems and processing systems that they had accumulated during the period that they were wholesalers. The responsibility for gas purchases was transferred to shippers¹. As a result of restructuring of the interstate pipeline industry in the 1980s, the shippers of the gas became responsible for the quantity and quality of the gas. These shippers were required to purchase natural gas at the wellhead and then obtain transportation through pipeline systems to deliver the gas to the market.

During this regulatory restructuring process, the pipeline companies were instructed by FERC to incorporate their aggregate gas purchase quality specifications into their new gas transportation tariffs. The transportation quality specifications incorporated in pipeline tariffs reflected generalized (i.e. ranges, limits) gas purchase specifications in place at that time of restructuring. As such, the limits or ranges did not reflect the average quality of gas delivered to the market, but more, the minimum or maximum limits that would be accepted into the system. The term "pipeline quality gas" is used to describe the quality of natural gas that is accepted to be transported into the interstate pipeline system and is defined via the pipeline tariff. Since the interstate pipeline companies had originally developed their gas purchase specifications based on the particular supply basin characteristics that the pipelines connected to and processing and liquid handling equipment in place, the tariff specifications varied from pipeline to pipeline.

During the late 1970's the importation of liquefied natural gas (LNG) began, but as prices for domestic gas moderated delivery, of this imported LNG focused on the Northeast U.S. LNG was introduced at the market end of the natural gas transportation system. In many other cases, domestic gas was liquefied locally and then vaporized during peak usage periods. During the decades of the 80s and 90s this LNG was primarily used in the market areas through the use of demand peak shaving facilities during winter periods. In some market areas, these LNG sources can supply up to 40% of the market needs for short term supply.

¹ Local distribution companies, marketers, producers, industrial users and electric generators

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 89 of 230

Presently, a small percentage of the market is served by alternative gas sources such as synthetic natural gas (SNG), or propane-air injection systems that are operated by LDCs, although the percentage of synthetic gas that a particular customer will see can vary significantly due to the market peak shaving characteristics of these sources of gas supply.

B.2 Characteristics of the Gas Transmission System and the Effects of Interchangeability of Gas

The principal natural gas infrastructure consists of gathering systems, transmission systems and distribution systems. In general, the pipeline system accepts a wide range of natural gas. Gathering systems are designed and operated to accept natural gas with some liquid hydrocarbons and impurities. Gas transmission and distribution pipelines are designed and operated to accept natural gas with the impurities and hydrocarbon liquids removed from the system. The following sections will describe in detail the effects of interchangeability of natural gas on particular components of the natural gas transmission and distribution infrastructure.

B.2.1 Operational Characteristics

In general, there are no major differences in the operation of a pipeline system for the range of natural gas compositions being discussed in this paper. It is assumed for this range of natural gases that the temperature and pressure of the pipeline transportation system is operated normally to prevent liquid dropout, rather than operating in liquid phase². In the case of LNG, it is assumed that the LNG is re-vaporized and heated to "normal" pipeline temperatures before being put into the pipeline, so that it does not affect the fracture characteristics³ of the steel.

There are efficiency advantages⁴ with natural gas with a higher heating value (e.g. LNG), because every volume of cubic ft of natural gas transported in a pipeline has more energy per cubic foot. The efficiency gain is a ratio of the higher heating values of the two products being compared. This will result in more "real" pipeline capacity during peak periods and some savings in fuel efficiency of compressors.

² PR-3-42 Materials of Construction for Use in An LNG Pipeline; Battelle, 1968

³ PR-3-9113 Fracture Control Technology For Natural Gas Pipelines; Battelle, 1993

⁴ NB 13 Steady Flow in Gas Pipelines (IGT #10); IGT; 1970

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 70 of 250

B.2.2 Pipe

Most natural gas transmission pipelines are made of steel and pipeline steel is sensitive to higher levels of hydrogen in natural gas⁵, which can cause blisters or cracks in the pipe. Depending on the metallurgy of the pipe, some steel⁶ is more sensitive than others. The range of hydrocarbon constituents being discussed in this paper does not cause deterioration in the steel material.

The injection of inert⁷ gases (combustion inerts) into the gasified LNG in order to lower the Wobbe number (i.e. improve the interchangeability) has been utilized (nitrogen and air) in the past and is anticipated to be used in the future. There are tradeoffs on the performance of steel pipe depending on the inert gas used:

- Nitrogen (N₂) does not appear to have any affect on pipelines and it is a common constituent of domestic natural gas.
- Oxygen (O₂) has aggressive internal corrosion characteristics when paired with water. The few cases where oxygen has been injected into the system to lower the Wobbe number, it is injected after locations where water may be inadvertently present in the piping systems (i.e. storage fields).
- Carbon dioxide (CO₂) can be an aggressive corrosion agent⁸ when combined with water. The presence of CO₂ in natural gas has been identified as a key contributor⁹ to several major pipeline safety accidents in natural gas storage fields.

Also, pipeline steel is sensitive to corrosion due to the presence of CO₂ and O₂ in the presence of water. This can occur in storage field piping or during conditions where dehydration equipment fails to operate.

Some older transmission pipes are connected with mechanical couplings which have elastomers¹⁰ which are sensitive to liquid hydrocarbon content. Presence of liquid hydrocarbons in some cases cause swelling of the some elastomers.

⁵ PR-140-105 Composition Characterization of Hydrogen Cracking in Line Pipe Materials; Welding Institute of Canada, 1980

⁶ PR-252-9605 Recommended Practice for Sour-Service Piping Components; Metallurgical Consultants, Inc., 1997

⁷ The term Inert refers to its combustion characteristics, rather than its corrosion characteristics

⁸ PR-15-9916 Interdependent Effects of Bacteria, Gas Composition, and Water Chemistry on Internal Corrosion of Steel Pipelines; Southwest Research Institute, 2002

⁹ PR-15-9712 Effects of Water Chemistry on Internal Corrosion of Steel Pipelines; Southwest Research Institute, 2000

¹⁰ Oil and Gas Industry Seals and Sealing - Success and Failure; Daniel L. Hertz, Jr., Seals Eastern, Inc., 1996,

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 71 of 250

Distribution piping is made of steel, cast iron, various types of plastic and copper. Performance of the steel is the same as transmission piping. Heavier hydrocarbon constituents in gaseous phase as discussed in this paper (components up to and including C6) do not materially affect plastic pipe. Cast iron has the same characteristics as steel as discussed above. Much like plastic components, copper should not be materially impacted considering the nature of the hydrocarbon constituents discussed in this paper. However, while the materials of construction of pipe itself should not be impacted by gas composition variations discussed in this paper, compositional changes and related impacts to pipe joint seals, gasket materials and couplings are somewhat less known. More specifically, there has been some evidence that compositional changes associated with switching to a leaner gas supply over time may induce small dimensional changes in some gasketing and seal materials when compared to original installation. Additional research in this area will be necessary to better understand this potential phenomenon.

B.2.3 Valves

In general valves are constructed of the same material as the pipe mentioned above and would exhibit similar behavior. Seals utilized in this equipment are similar to what is used in controls and instrumentation. Generally, there are two types of elastomers, butyl rubber and viton type materials. The performance of these materials is not expected to vary substantially based on the interchangeability range discussed here, however additional research will be needed to confirm this conclusion and to better understand the long term effects of leaner supply compositions on gasket and seal materials that have been traditionally exposed to compositions with hydrocarbon constituents greater than C4.

B.2.4 Controls and Instrumentation

Many controls used in transmission and distribution systems are made of the same materials as pipe and valves. In some cases "pot metal" and aluminum is used. No issues are expected with the range of interchangeability is expected. Certain type of instrumentation is affected by different constituents such moisture and sulfur analyzers but these fall outside the ranges that are being discussed in this paper. Of course, the change in constituents will cause a change in some basic properties and if used in a calculation (i.e. heating value) it must be accounted.

There does not appear to be any significant issues with the type of equipment that is used to determine the heating value (i.e. calorimeter, chromatograph) of

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 72 of 250

natural gas with the range of expected values. However, calibration gas associated with these instruments may need to be adjusted to better account for compositions actually being measured. As with the potential abovementioned issues with seal and gasket materials, additional research is needed to better understand the long term impact of "hydrocarbon lean" supplies will have on gaskets and seals that have been "conditioned" by richer hydrocarbon supplies through C6+.

B.2.5 Measurement

Generally, measurement devices for the purpose of determining the commercial value of gas by measuring the volume of gas and calibrating it with the heat content of the gas moved. Orifice meters and turbine meters that are used in transmission and distribution systems do not seem to be affected by the range of gases that are discussed in this paper. Positive displacement meters used in distribution service are not affected either by the constituents being discussed. The main measurement issue is the level of accuracy needed in correlating the measurement of the constituents of the gas (i.e. heating value) with the quantity of gas measured (mcf). This can be done on a continuous basis, resulting in high accuracy, or averaged by using frequency based gas samples (sampling bottles).

Finally, periodic spot samples (based on location and timing) of heating value can be used to approximate the heating value for a wide geographic distribution area. However the issue of measurement may have significant impacts on LDC's and end users. Most custody transfer locations ("delivery points") utilize energy measurement techniques (chromatography) for accounting purposes. LDC's that have multiple pipeline feeds into their systems establish "therm zones" or calculated energy flow factors to properly bill customers. As a result of compositional changes associated with the interchangeability process, these therm zones may shift requiring additional hardware and operating costs (additional chromatography measurement instrumentation) to properly establish real time shifts for billing purposes. If measure compensation is not fully understood and adequately measured, increases in lost and unaccounted for gas (LUF) may occur.

In addition, residential meters may also be impacted by hydrocarbon lean supplies relative to historically acceptable hydrocarbon rich supplies. Materials of construction of gas meters, specifically residential diaphragm meters may be impacted similar to the potential effects discussed with seals and gaskets.

B.2.6 Gas Heaters

Natural gas Heaters either water bath or air to air heat exchangers are prominent in both the transmission and distribution systems. These units are typically atmospheric burners and do not have emission controls. In certain states emission controls are needed due to permitting requirements. The issues with air emissions should be in the same category as the "atmospheric burners" discussed later in this report. However, as with commercial and industrial combustion applications, additional research is needed to better understand the effects of varying compositions have on these burner control systems, combustion chambers and other hardware associated with this equipment.

B.2.7 Dehydration Facilities

Natural gas transmission and distribution companies utilize natural gas dehydration at storage facilities when natural gas is withdrawn from those fields. These facilities are typically either glycol dehydration or sorbent bead technology. Neither of these technologies is affected by the range of constituents that are discussed in this paper.

B.2.8 Gas Processing

In some cases, additional gas processing to remove CO₂ is conducted by transmission companies. There appears to be no problems with those processes by the range of constituents being discussed in this paper.

B.2.9 Gas Compressors

Reciprocating and centrifugal compressors are designed to compress certain ranges natural gas. The ranges of constituents of natural gas being discussed in this paper appear to not materially affect the capability of these units; however these effects must be evaluated on an individual basis to establish operability and efficiency impacts due to potential changes in the physical properties of the gas being compressed. While the higher range of heating values of gas with higher ethane and propane content will increases the overall amount of heat content transported, the higher molecular weight of the gas will reduce the volumetric efficiency compressor. Gasket and seal materials may also exhibit long term impacts associated with the transition to leaner supplies relative to historically acceptable richer supplies.

B.2.9.1 Reciprocating Gas Compressor Drivers – Environmental Impacts

Reciprocating compressors utilize natural gas powered reciprocating engines. These units are more typically two-cycle engines (as compared to four-cycle engines). These units can be naturally aspirated or utilize super or turbo charging. Typically the larger units utilize fuel injection rather than carburetion.

Recently, state and federal permitting requirements have put limitations on the amount of carbon monoxide (CO) and nitrogen oxides (NOx). In some cases, catalytic converters are utilized on four-cycle units to reduce CO. Catalytic converters or ammonia slip injection are rarely used to reduce NOx reductions on 2 cycle engines. The concentration of CO is a function of the air/fuel ratio and it does not appear the range of constituent values being discussed in this paper will have a material effect on CO emissions.

NOx emissions are a function of combustion temperatures. Higher combustion temperatures can occur if the heating content of the fuel increases and there is not a coincident increase in the quantity of combustion air. Present engine control technology does not compensate for the change in the amount of combustion air as a result in the heating value of natural gas. This can be important if the constituents of the gas change on a periodic basis causing the heating value to change. This can cause an increase in combustion temperature resulting in higher NOx emissions. Research is being conducted at this time to determine the effects on NOx emissions of changing the fuel compositions. Present permits allow the testing of the individual units under controlled conditions. As of yet, these units are not subject to continuous emission monitoring which would detect changes in NOx emissions due to fuel composition changes.

The introduction of higher amounts of ethane and propane may cause increases in detonation under high load conditions, since the ignition temperature of these constituents is lower than methane, the primary constituents in natural gas. New combustion head designs are based on modified ignition and compression ignition designs that may show different characteristics.

B.2.9.2 Turbine Gas Generator Drivers for Centrifugal Compressors

The performance of these units should be very similar to the turbines that are used to power electric generation, except gas compressor operation usually entails operating at varied speed ranges as compared to units attached to electric generators. Permitting for natural gas compressors at this time does not require the use of continuous emission monitoring and therefore emission

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 75 of 250

transients due fuel changes has not been monitored. A research program has been initiated to determine the effects.

The introduction of higher amounts of ethane and propane will not cause detonation conditions as in reciprocating engines due to the continuous burning characteristics of gas turbines.

B.2.10 Odorization

Odorization involves the injection of trace amounts of mercaptan compounds into the gas stream. While there has been reports of masking of the odor due to higher levels of hydrocarbons in the natural gas stream, the level of constituents being discussed in this paper do not appear to present a problem. However, each odorization system needs to be evaluated individually to assess potential local impacts on current odorization practices.

B.3 Safety Issues

Ethane and propane have different physical characteristics than methane. Both of these gases are heavier than air and equipment and procedures designed for systems with natural gas composed primarily of methane may vary. Equipment such as gas detectors located in the ceilings of compressor stations will probably not be affected since there will be a significant amount of methane in any leak that occurs. However, the lower and upper flammability limits of a gas mixture are dependent on composition and the effects of compositional changes will need to be evaluated locally.

Blowdowns (exhausting gas to the atmosphere) from the pipeline may be partially affected if there is stratification of the methane, ethane and propane constituents. The change to incorporate these constituents will probably require the modification of the operating and emergency procedures.

B.4 SNG

A limited number of SNG Plants are currently in operation in the U.S. Impacts to these facilities are feedstock related and directly impact the production of hydrogen if hydroreforming is included in the particular process, typically utilized for hydrodesulfurization processes. Each facility will need to be evaluated on an individual basis to assess specific impacts.

B.5 Impacts on Local Peakshaving Facilities

North America has a large base of residential and commercial customers that use more gas in the winter than summer, although this load curve is flattening due to increased gas-fired power generation. Local peakshaving facilities are used throughout the country to augment pipeline supplies during temporary peak demand periods. These facilities are typically located closer to large demand centers (major urban areas) or areas of a distribution system that have limited pipeline supplies. These facilities consist of LNG liquefaction plants & associated storage, LNG satellite distribution plants and propane-air plants. The objective of this section is to address the impacts regasified Btu stabilized LNG imports and unprocessed domestic supplies may have on liquefaction plant operations and the interchangeability issues associated with propane-air when combined with regasified LNG Btu adjusted gas.

The majority of local peakshaving supply is provided by LNG liquefaction plants which generally consist of between one and four billion cubic feet (Bcf) of storage. Pipeline supplies are liquefied during warmer months (about 200 days per year) and revaporized for delivery into local pipelines and distribution systems during the coldest days (usually no more than 20-40 days a year). A recent survey identified 77 active peakshaving liquefaction plants, most of which (62) are located in the United States making the U.S. by far the world leader in natural gas peakshaving liquefaction. From a regional perspective, it is not surprising that over 25% of the plants are concentrated in the Northeast. Table B.1 shows the location of peakshaving liquefaction plants by state.

Table B.1 Peakshaving Liquefaction Plants by U.S. State¹¹

State	Number of Plants
Massachusetts	6
Indiana, Tennessee	10
Georgia, Iowa, North Carolina	12
Alabama, Connecticut, Minnesota, New York, Pennsylvania	15
Maryland, Oregon, Virginia, Wisconsin	8
Alaska, Arizona, Arkansas, Delaware, Idaho, Illinois, Nebraska, Nevada, New Jersey, South Carolina, Washington	11
Total	62

More than half the plants with roughly half the liquefaction capacity were built in the five year period from 1971 – 1975. This was a period of rapidly expanding natural gas demand with resulting capacity limitations on U.S. pipelines. The drop in construction was primarily due to gas supply curtailments and the development of other peakshaving alternatives including underground storage. Construction was revived in the mid to late 1990's and as a result, most plants were designed and constructed with a feedstock composition consistent with processed pipeline supplies during these periods.

LNG peakshaving makes economic sense when the cost to deliver gas from storage is less than the cost to lease pipeline capacity to deliver the same amount of gas. The value of peakshaving is the avoided cost of pipeline transportation required to deliver the peak day gas. This benefit does not include the obvious supply security and reliability associated local supply control. As a result, distribution companies have installed over 9 Bcf/day of LNG vaporization capacity to help deal with this highly seasonal, weather sensitive load.

B.5.1 Feedstock Implications on Peakshaving Liquefaction Operations

LNG peakshaving plants consist of four process components including feedstock purification, liquefaction, storage and vaporization. A brief description of each component process is described below.

Purification

¹¹ LNG Source Book 2001

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 78 of 250

Feedstock purification is a critical first step in the liquefaction process. Traditional feedstock impurities are removed by a variety of processes such as mole sieve adsorption and solvent absorption such as Rectisol and amine systems. These impurities include sulfur, water and carbon dioxide which may freeze at process temperatures.

Liquefaction

Most commercial liquefaction processes generate "heat sinks" by flashing condensed refrigerants across an expansion valve with process heat exchanges housed in a "cold box". These processes include the Cascade Process utilizing propane, ethylene and methane in discrete "cooling circuits" as refrigerants, the SMR (single mixed refrigerant) process using multicomponent refrigerants and the PPMR (propane pre-cooled mixed refrigerant) process utilizing mixed refrigerants and a propane pre-chiller to cool the natural gas stream prior to the liquefaction process. Another important process is the open loop expansion cycle where compressed natural gas is expanded across a turboexpander which in turn drives the compressor. Low pressure expander exhaust is sent to the distribution system. In this process, approximately 80% of the feed gas is utilized in the refrigeration circuit while the remaining 20% is converted into liquid.

Finally, the closed loop nitrogen recycle process where high pressure nitrogen is expanded to supply cooling similar to the turboexpander process described above.

In most cases, the process gas stream is cooled down to approximately -110 to -120°F before liquefaction. Heavy hydrocarbon components are condensed out of the gas stream in this step and are reheated and removed. Otherwise, these components would precipitate out and freeze later in the process resulting in blockages in the cold box heat exchangers.

Storage

Liquefied natural gas is stored in insulated tanks that maintain the LNG at approximately -260°F. This liquid is constantly "boiling", or generating vapor, due to heat leaks. The cold vapor or "boiloff gas" is either utilized in the liquefaction process when running, or delivered into the local distribution after warming.

Vaporization

Liquid natural gas is pumped from the tank and re-vaporized for delivery into the local distribution system.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 79 of 250

Each peak shaving liquefaction process has individual design criteria and the effectiveness of the process is highly dependent on the constituents of the feedstock. Plants are designed to handle moderate swings in feedstock composition including varying concentrations of carbon dioxide, nitrogen, water, non-methane hydrocarbons and to some degree, heavy hydrocarbons (C6+). Liquefaction process feedstock compositions that exceed original design criteria could have significant operational consequences ranging from efficiency and reliability issues through rendering a plant completely inoperable. More specifically, feedstock *interchangeability* of unprocessed pipeline natural gas and Btu adjusted regasified LNG imports presents a real concern for existing peak shaving liquefaction units throughout North America. The potential impacts are discussed below.

B.5.2 Impacts of Unprocessed Pipeline Natural Gas Feedstock

Unprocessed natural gas feedstock is typically rich in higher hydrocarbons beyond C6+. Although not typically analyzed by pipelines or LDC's, other trace constituents in the C6+ fractions can have significant impacts on both purification and liquefaction processes. When gas is not processed to historically acceptable levels in which the vast majority of C6+ components have been reduced to low concentrations, these trace constituents increase in concentration along with the measured heavy hydrocarbons found in the C6+ fraction. Examples of these trace constituents of concern are:

Cycloparaffins & Aromatics

Cyclohexane	Benzene(s)
Methylcyclohexane	Toluene
Cyclopentane	Xylene(s)


In most cases, feedstock composition is monitored utilizing gas chromatography out to C6+. Increasing heating values and specific gravity associated with an increase in C6+ components is an indicator that unprocessed gas is present and it is likely that trace constituents concentrations are also increasing. As the temperature of the process gas flowing through the cold box decreases, these trace constituents have a tendency to freeze and "plate" out on the interior surfaces of the heat exchangers in the cold box. Heat exchangers will continue to operate but with decreased efficiency and greater pressure drops. Eventually the exchangers will become completely plugged resulting in plant shutdown. Existing plant designs accounted for the potential of historical processed gas hexane concentrations in the feedstock and engineered removal strategies at temperatures between -100°F to -120°F to avoid freezing. When domestic gas is

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 80 of 250

unprocessed, heavy hydrocarbons remain in the feedstock to LNG plants and plant operations suffer. This phenomenon is best illustrated in Figure B.1 below. The gas quality trend graphically demonstrates the overwhelming impact of increases in heavy hydrocarbon concentrations and associated trace constituents on the efficiency of the liquefaction process. As the heating value of feedstock trended up, the measured values of total aromatic and cycloparaffins was found to be over five times that of historically received processed gas (from 100 parts per million (ppm) to over 500 ppm) resulting in premature exchanger fouling, inefficient operation and ultimately, plant shut down. As the trend lines in Figure B.1 show, as the heating value trends up, plant make falls off due to partial exchanger fouling. In four instances, fouling was evidently extreme and the make fell off precipitously. This clearly demonstrates the significant impact

Figure 1
LNG Liquefaction
Oct '02 thru Sept '03

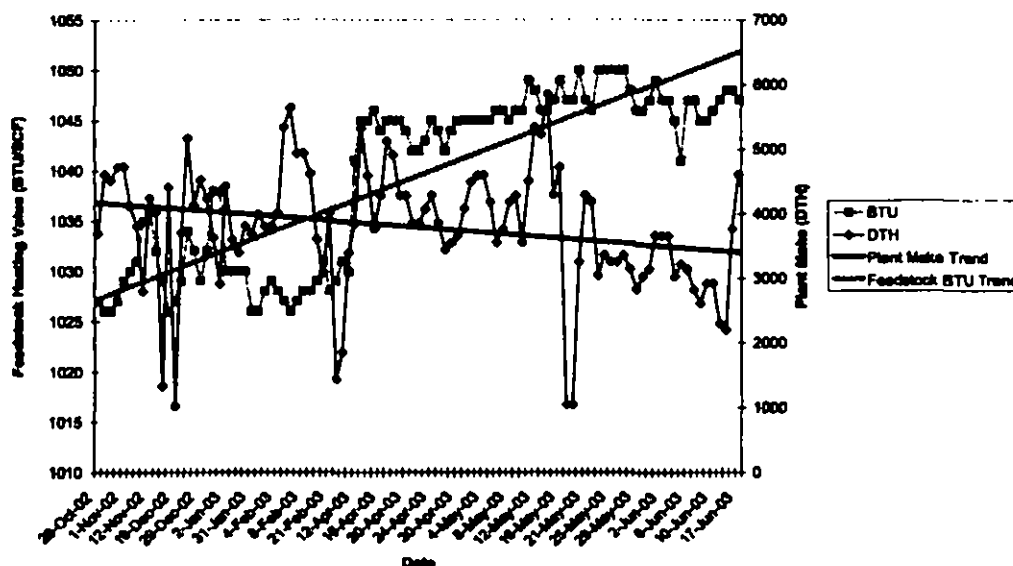

unprocessed pipeline gas could have on peakshaving liquefaction and that pipeline gas quality and interchangeability is a major consideration for LDC's that operate LNG peakshaving liquefaction plants.

B.5.3 Impacts of Regasified Btu Adjusted LNG Feedstock

In some cases, LNG imports contain relatively high concentrations of ethane (C2) and propane(C3). To ensure that interchangeability criteria related to combustion are achieved, the LNG Terminal output is diluted with an inert gas such as nitrogen. While this output gas does not contain heavy hydrocarbons such as C6+ or carbon dioxide and thus does not impact the purification section of

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 81 of 250


existing plants, it does present other challenges in both the liquefaction and storage areas of the plant. The greatest single impact is on efficiency, or "net" LNG produced. Secondary effects include the handling and disposal of excessive C2 and C3 hydrocarbon liquids that will condense out at various stages of the liquefaction process. Another serious concern is the handling of excessive nitrogen rich boiloff that will flash off in the storage systems leading to potential excess boil-off beyond original design capacity .

A computer simulation was performed to quantify the overall impact of liquefying Btu stabilized LNG import feedstock. Figure B.2 highlights the simulation process. It should be noted that this simulation is not process specific and in general applies to most liquefaction processes previously cited (the open expander process is somewhat different) This simulation looks at the fundamental thermodynamic conditions across a typical LNG peakshaving liquefaction process¹². The circles represent process steps including heat exchange, vapor/liquid separation and flash. Squares represent stream identification including pressure, temperature flow etc.

¹² Simulation by Kryos Energy Inc.

Figure B.2

Liquefaction Process Computer Simulation Model

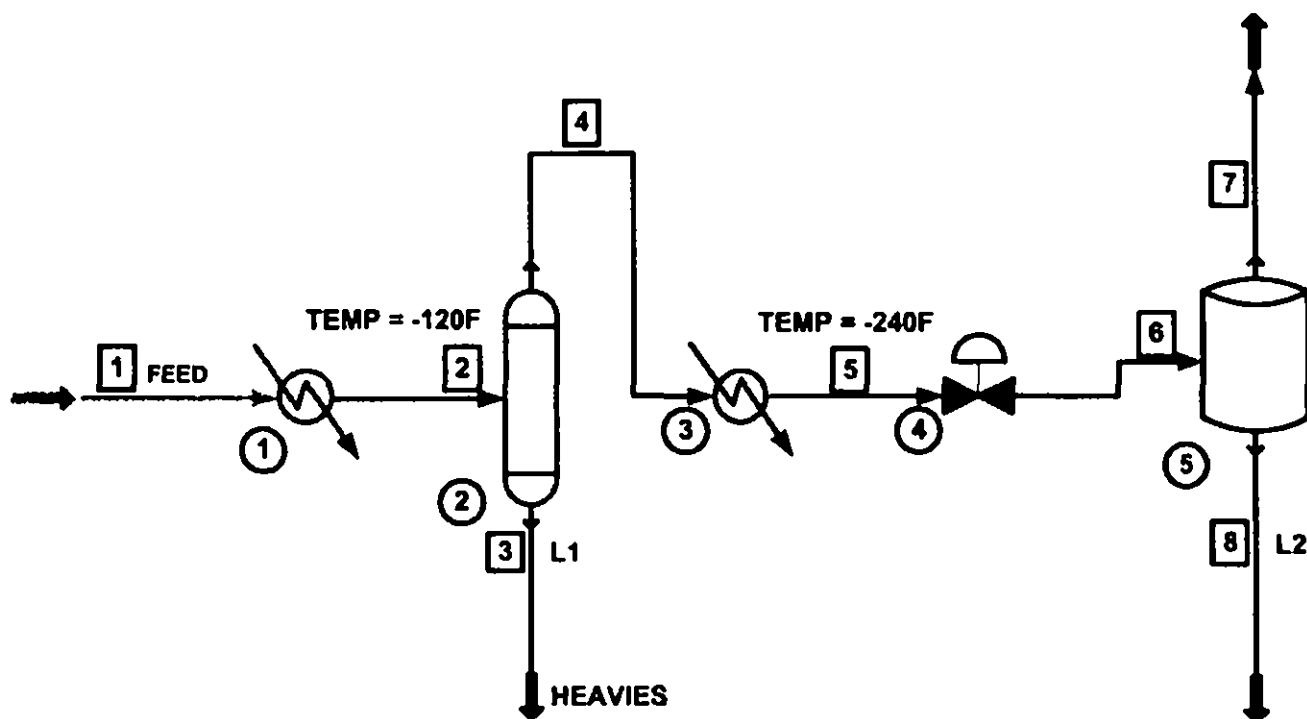

Nine feed gas compositions were analyzed and are shown in Table B.2. The simulation model input was based on one hundred units of inlet feed gas for each case to demonstrate the *relative* net production of:

- LNG
- Tank Flash Vapors
- C2+ Hydrocarbon Removal.

This simulator does not require actual flows for a specific plant or process as it relies on the *relative* flows in evaluating results. The first feed gas composition (A) represents a typical processed pipeline gas. The remaining eight feed gas compositions were used to determine the values of critical outputs which effect thermodynamic performance.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 83 of 250

Table B.2 Liquefaction Simulation Model
Feed Gas Compositions

Feed Gas Composition Volume %	N2	C1	C2	C3	C4
A	1.0	95.4	3.0	0.5	0.1
B	1.0	94.4	4.0	0.5	0.1
C	1.0	91.9	3.0	4.0	0.1
D	4.0	92.4	3.0	0.5	0.1
E	3.0	93.4	3.0	0.5	0.1
F	2.0	94.4	3.0	0.5	0.1
G	1.0	89.9	6.0	3.0	0.1
H	1.0	87.9	8.0	3.0	0.1
I	1.0	92.9	4.0	2.0	0.1

Each feed gas composition tabulated in Table B.2 was modeled at four different operating pressures to account for varying inlet pressures typical for the most common liquefaction technologies¹³. These pressures include 200, 300, 400 and 500 psig respectively. The data confirms suspected impacts identified earlier and suggests the following:

- In all cases lower Net LNG Production
- Increased C2+ in feedstock results in hydrocarbon dropout
- Increased Nitrogen in Feedstock Results in Increased Tank Flash.

For all cases considered in the model, C2+ dropout was fixed to occur at -120°F and the LNG product sub cooled to -240°F prior to delivery to LNG storage. Tank bolloff consists of vapors from LNG flash and does not include tank heat leak due to variations in tank design, capacity and inventory. This model concentrates on feed gas composition impacts in LNG processing.

The simulation clearly demonstrates the sensitivity of gas composition to the overall liquefaction process. The majority of plants designed and constructed to meet historical gas composition feedstock criteria will not be able to make process adjustments to accommodate either unprocessed pipeline gas or Btu stabilized LNG imports as feedstock. Plants would require extensive redesign and substantial capital investment (with little or no direct benefit to LNG production) to address the following common issues:

¹³ Flash Simulation using ChemCad & Peng Robinson EOS

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 84 of 250

- Increased removal and collection of condensed C2+ components
- Removal of increased concentrations of aromatics and cycloparaffins
- Increased storage system boil off handling including handling/blending of low Btu nitrogen enriched boil off gases.

Further compounding the problem is the possibility of receiving intermittent "slugs" of Btu stabilized LNG imports as feedstock. Significant variations in feedstock composition may result in varying the density of the LNG product. If storage systems are not equipped for recirculation of liquids, density stratification may evolve over time resulting in potential "roll over" of the LNG product in the tank which could cause significant damage to the tank and storage systems. This is especially true if the storage system only allows liquid to enter the bottom of the tank and the tank is nearly full with minimal ullage.

B.6 Impacts on Propane-Air Peakshaving Operations


Liquid Propane-Air (LPA) Plants for peakshaving operations have been in use since the mid-1930's. These Plants use liquefied petroleum gas (LPG), a mixture of C₃ and C₄ hydrocarbons, as the feedstock. A typical Plant consists of liquid receiving, storage, transfer and vaporization, air compression and propane-air mixing. This process involves blending a mixture of approximately 55% by volume propane with 45% by volume air into the natural gas distribution system. Blending is a primary concern with this type of peak shaving operation making the pipeline natural gas composition receiving this peaking supply a critical variable in assuring interchangeability. Due to significant differences in the chemical properties and combustion characteristics of LPA from natural gas, accurate and reliable blending becomes an important function for achieving satisfactory gas interchangeability. Depending on local distribution company requirements and pipeline natural gas quality, LPA having 50%-60% propane blended with 40%-70% natural gas could provide satisfactory gas interchangeability.

Operating experience, equipment testing and classical interchangeability criteria such as Wobbe, Knoy, Weaver and AGA Indices, have been used to develop guidelines for determining gas interchangeability. Figure B.3 highlights the general interchangeability guidelines used by many companies, however, it should be noted that the criteria is subject to change based on specific pipeline gas composition.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 85 of 250

Figure B.3

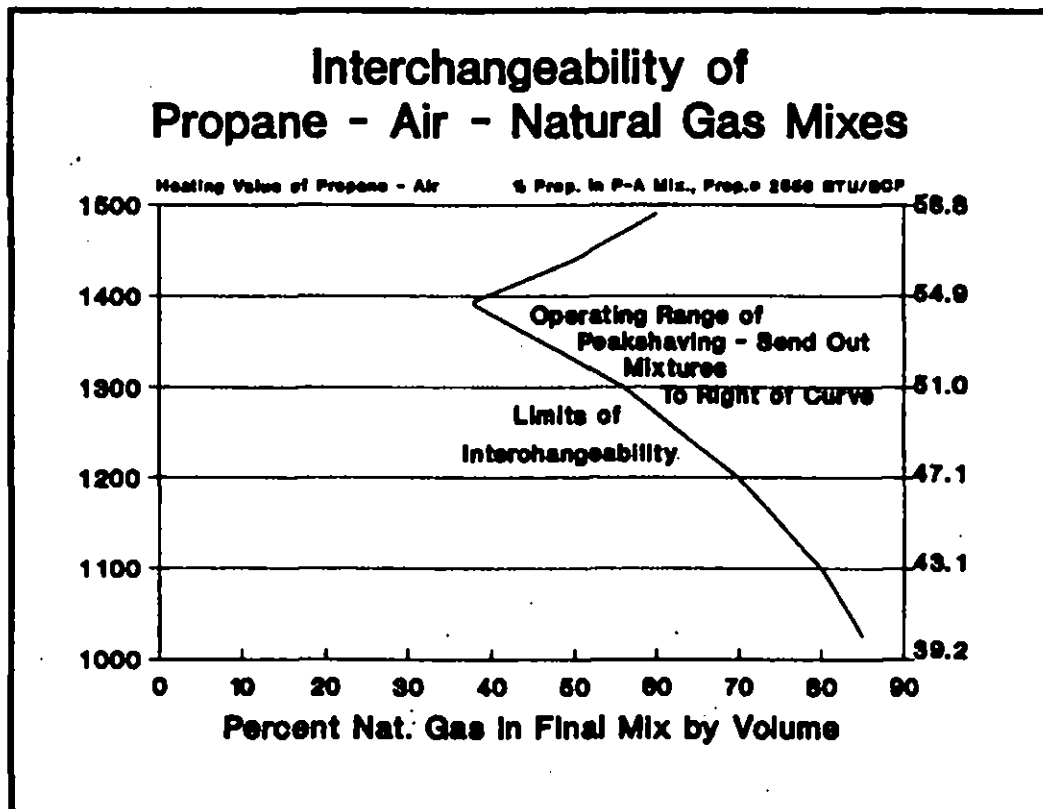

The potential impacts associated with propane-air peakshaving and Btu stabilized LNG are directly related to blending. In summary, the increased ethane and propane concentrations found in some LNG imports compound the blending and mixing problem and in some cases, can result in blends beyond the operating range of interchangeability existing blending equipment is designed to handle. This can result in significant "yellow tipping" as compared to blending with more traditional pipeline supplies.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 86 of 250

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 87 of 250

Appendix C

Changing Supply Impacts on End-Use (Burner Tip Combustion Issues)

Ted Willams, AGA and
Bob Wilson, Keyspan, Coordinators

While the issues associated with gas interchangeability are broad, including gas supply and transportation issues, gas interchangeability is by definition a fundamentally technical issue of end use. Traditionally and in most applications, gas interchangeability is associated with combustion applications. The challenge faced in considering broad aspects of interchangeability is identification of common requirements of end use combustion and identifying, based on these commonalities and potential unique requirements, efficient and equitable means of addressing end use requirements without imposing constraints on gas supply.

This appendix summarizes combustion end use considerations discussed by the Work Group and captured by Work Group stakeholders bringing expertise and unique perspectives to the discussion of gas interchangeability. This discussion is limited to the range of stakeholders actively participating in the Work Group and the drafting of the Gas Interchangeability White Paper. Therefore, not all end user interests are covered by this appendix.


C.1 Overview of End Use

Bruce Hedman, EEA

C.1.1 Introduction

Natural gas consumption in the United States in 2003 was 21.8 trillion cubic feet (Tcf). The industrial sector was the largest user, accounting for 7.2 Tcf or 34 percent of total gas consumption. The residential sector was the second largest user of natural gas, consuming 5.0 Tcf or 23 percent of total U. S. consumption. The power generation sector, which consumed 4.4 Tcf, was the third largest gas user, accounting for 20 percent of total gas demand. The commercial sector consumed 3.1 Tcf or 14 percent of total gas demand. The gas transmission sector, which uses pipeline, lease and plant fuel for compressors and process heating, consumed 2.0 Tcf or 9 percent of total gas used in the U. S. Natural gas use in the transportation sector (natural gas vehicles) was relatively small (0.02 Tcf). Figure C.1.1 shows the breakdown of gas use by sector.

Figure C.1.1 Natural Gas Consumption by Sector, 2003

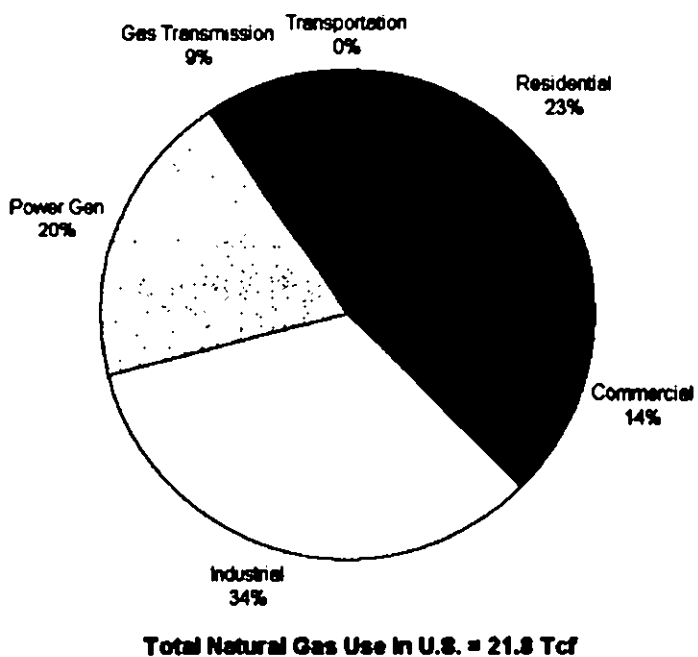


White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 89 of 250

Energy and Environmental Analysis, Inc. (EEA) projects that U.S natural gas consumption will exceed 31 Tcf by the end of the next decade. The current EEA Base Case¹ forecasts U. S. natural gas consumption to grow to 31.4 Tcf by 2020, an increase of 45 percent or 2.2 percent per year. All sectors of the economy, residential, commercial, industrial, and power generation, contribute to this growth, driven by the general pace of economic activity and growth, the price and availability of alternative fuels, the growing demand for electricity, and environmental regulations that affect might affect fuel competition, particularly in the power generation market. The fastest growth is expected from the power generation sector which contributes to well over half of the total increment. Figure C.1.2 shows the projections of natural gas consumption by sector from 2003 to 2020.

Figure C.1.2 Natural Gas Consumption Projections by Sector

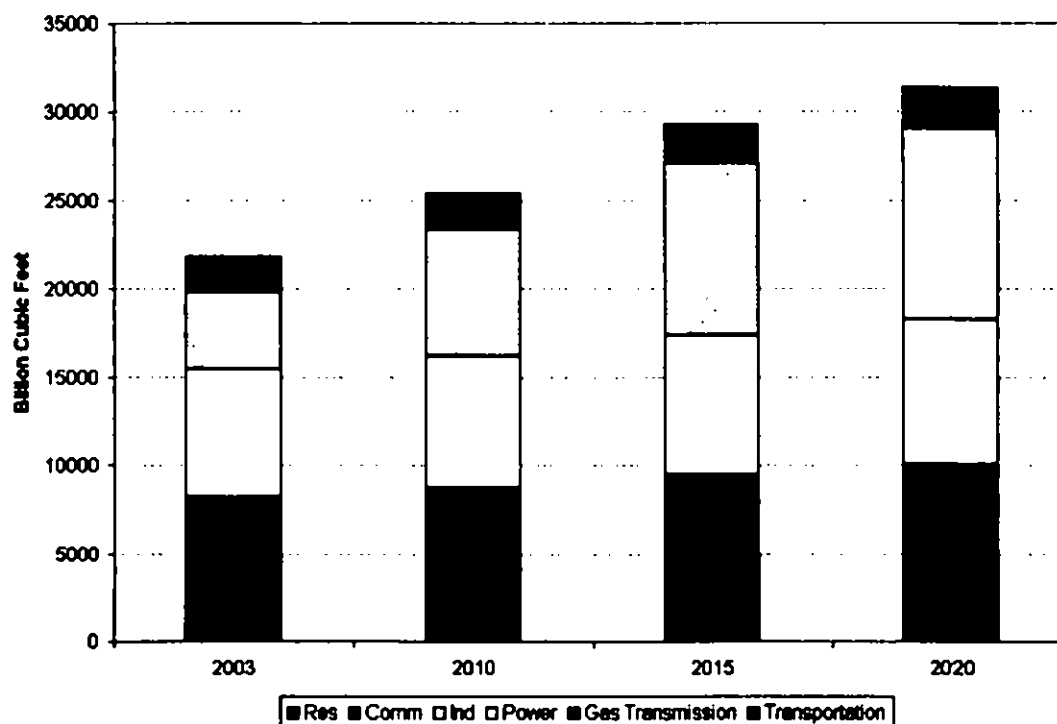

C.1.2 Residential Sector

The United States has an estimated 119 million housing units of which over 61 million use natural gas for at least one energy service. The total natural gas consumption by these households equaled almost 5.0 TCF in 2003 representing

¹ The September 2004 EEA Base Case is an update to the spring base case that formed the basis for the INGAA Foundation natural gas infrastructure study.


White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 90 of 250

23 percent of total natural gas consumption in the country. Despite the increasing size (in terms of square footage) of newer houses, average gas use per household is declining because of improved insulation and more energy efficient equipment.

The primary uses of natural gas in the residential sector are space heating, water heating, cooking, clothes drying, and other uses (that include space cooling, and hearth products) (Figure C.1.3.). The largest use of natural gas is space heating, accounting for 64 percent of total natural gas use in the sector. Natural gas dominates the space heating market in the U. S. residential sector. In recent years gas has captured more than 60 percent of the space heating market for new single family homes and will continue to dominate this market in the future. In addition, the percentage of natural gas heating in new multi-family construction increased slightly in recent years.

Figure C.1.3 Residential Natural Gas Consumption by End-Use, 2003

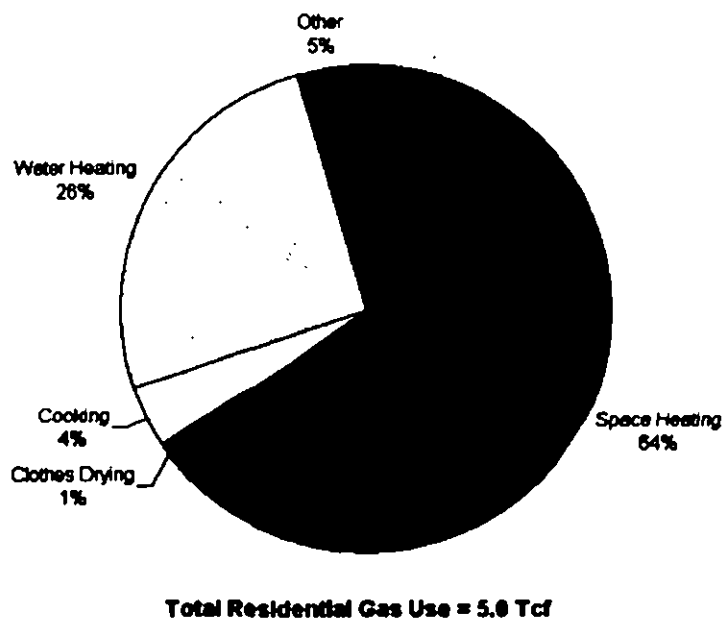

Water heating is the second most important residential use of natural gas, accounting for 26 percent of total gas use in the residential sector. Unlike space heating, water heating is generally not weather-sensitive. Nevertheless, the market penetration of natural gas water heating is similar to that of space heat-

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use


Exhibit No. FGT-6
Page 91 of 250

ing; natural gas is currently used for over two-thirds of all residential water heating requirements.

Cooking is the third largest residential use of natural gas, accounting for 4 percent of total natural gas consumption in the residential sector. However, market shares of both ovens and ranges are dominated by electric appliances. Natural gas is also used for clothes drying; this end-use represents one percent of total residential gas use. Other end-use, which includes space cooling and hearth products, account for the remaining consumption (5 percent).

Figure C.1.4 shows the regional breakdown of residential natural gas use in the U. S. The East North Central (ENC) region consumes the largest amount of natural gas, representing about 26 percent of total residential natural gas consumption. The second largest consuming region is the Middle Atlantic (MATL), accounting for 19 percent. The third largest consuming region West North Central (WNC) accounted for 14 percent.

Figure C.1.4 Residential Natural Gas Consumption by Region, 2003

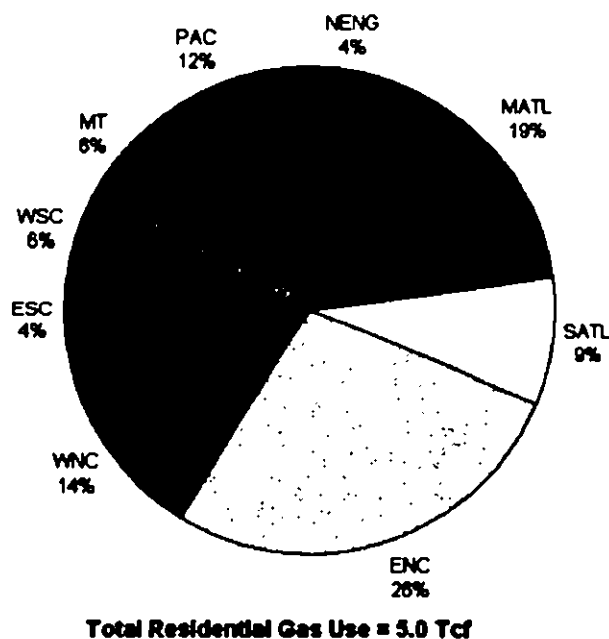

Population growth and housing construction will largely determine the long-term growth in residential gas consumption, tempered by contributing factors such as conservation, efficiency and technology changes. Natural gas consumption and

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 92 of 250

expenditures are also positively correlated with household income: the higher the household income, the more energy the household consumes energy. The higher use and related expenditures is reflected in the typically larger homes owned by higher-income families, requiring more heating and additional uses for natural gas.

Figure C.1.5 shows the projected use of natural gas in the residential sector by end-use, from 2003 to 2020. Overall residential natural gas consumption is projected to grow at a modest rate of 1.3 percent per year. Gas use for space heating is expected to grow by 0.7 percent per year, while gas use for water heating is projected to increase annually by 1.7 percent. Natural gas consumption projections for clothes drying and cooking are projected to grow by 1.8 percent and 1.5 percent per year, respectively. The fastest growth is expected for "other use", growing annually at a rate of 4.3 percent. This is driven by the continued popularity of hearth products in residential units.

Figure C.1.6 shows residential natural gas use projections by region. The region with the largest projected growth in residential gas use is the West South Central (WSC) region, which is estimated to grow annually by 1.8 percent. The Mountain (MT) region reports the second largest growth, at 1.7 percent per year. The East North Central (ENC) region, which currently consumes the largest amount of residential natural gas, is expected to grow at 1.1 percent per year.

Figure C.1.5 Residential Natural Gas Consumption Projections by End-Use

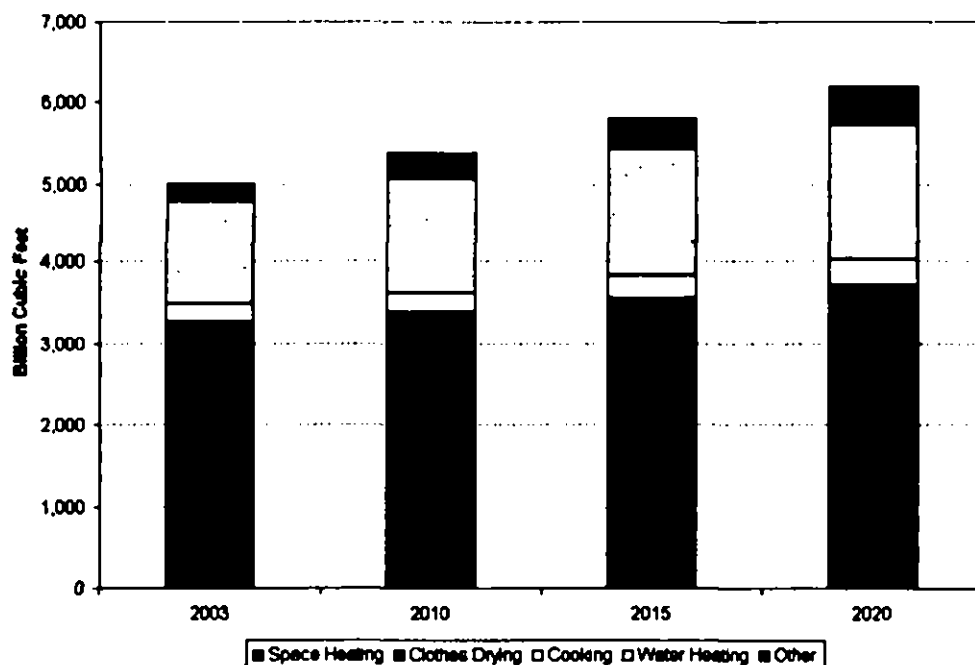


Figure C.1.6 Residential Natural Gas Consumption Projections by Region



C.1.3 Commercial Sector

The commercial sector accounted for about 14 percent of total U. S. gas consumption in 2003, consuming over 3.1 Tcf of natural gas. This sector is more diverse than the residential market, consisting of business establishments, and service organizations such as retail and wholesale facilities, hotels and motels, restaurants, and hospitals. The commercial sector also includes public and private schools, correctional institutions, and religious and fraternal organizations. In all, over 5 million commercial customers consume natural gas for at least one energy service.

The uses of natural gas in the commercial sector are less seasonal than in the residential sector. Commercial customers consume about 7.5 times more gas, on a per customer basis, than customers in the residential sector.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 94 of 250

Figure C.1.7 Commercial Natural Gas Consumption by End-Use, 2003

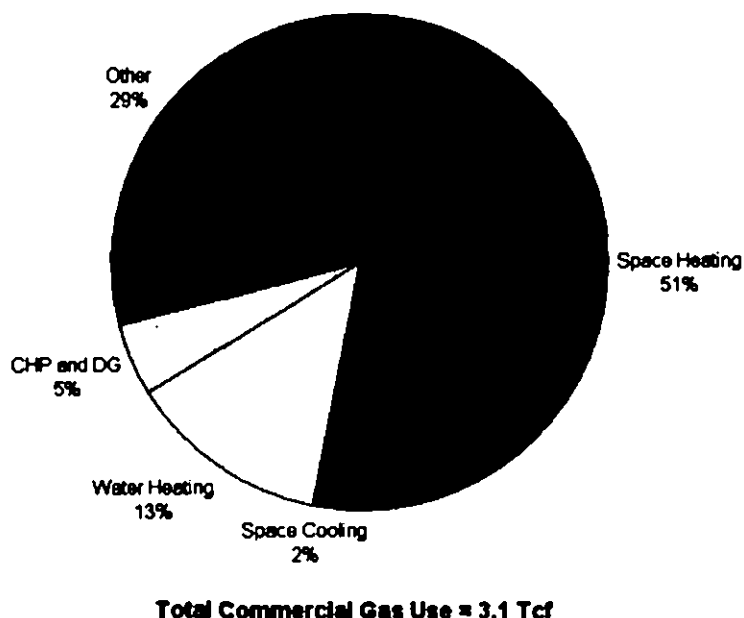


Figure C.1.7 shows natural gas consumption by end-use in the commercial sector. As shown, most of the natural gas consumed by the commercial sector is used for space heating and water heating, and there has been a strong trend for customers to choose gas for these applications where gas is available. Currently, space heating accounts for over half of total gas use in the sector, while water heating accounts for 13 percent. Other uses such as cooling, cooking, drying, desiccant dehumidification, and combined heat and power (CHP), or cogeneration, comprise smaller shares of natural gas use. In recent years natural gas has been losing market share among commercial customers to electricity in most end-uses except cooking. The loss has been the greatest in cooling and space heating.


One promising growth area for natural gas in commercial applications is on-site power generation. In order to provide backup capability and to minimize power purchases during peak periods, commercial customers are expected to increasingly turn to small, on-site generators to support their electrical needs. In certain capacity constrained regions, customers with on-site generation can receive capacity payments. Natural gas powered reciprocating engines, turbines, and fuel cells are projected to be used in many commercial settings to increase their

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 95 of 250

independence from the utility grid, and reduce the possibility of power disruption and inconsistent power quality. CHP is already penetrating certain commercial markets. Hospitals, universities, airports and other establishments with appropriate thermal and electrical load, including those that cannot afford power failure, are becoming major users of CHP.

Figure C.1.8 – Commercial Natural Gas Consumption by Region, 2003

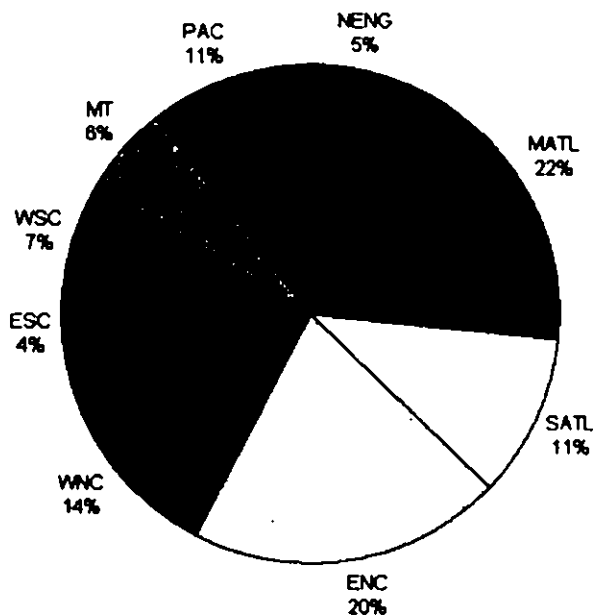

Total Commercial Gas Use = 3.1 Tcf

Figure C.1.8 shows the regional representation of commercial gas use in the U. S. The figure shows that the largest consumption levels are in the Middle Atlantic (MATL) and East North Central (ENC) regions. These two regions account for 42 percent of total commercial gas use. Other major consuming regions are the West North Central (WNC) and South Atlantic (SATL) regions. These two regions represent 25 percent of total commercial gas use.

Driven by general economic activity and population growth, , commercial sector gas consumption in the U. S. is projected to grow from 3.1 Tcf to 3.9 Tcf between 2003 and 2020, or 1.3 percent per year. Figure 9 shows the projected increase by end-use. Space heating and water heating are expected to grow at a relatively modest rate of 0.9 and 1.2 percent per year, respectively. Space cooling and other uses are projected to grow at annual rates of 1.6 percent and 1.5 percent, respectively. The fastest growing end-use is CHP and other forms of distributed generation, which are projected to grow at a robust rate of 3.3 percent annually.

Figure C.1.9 Commercial Natural Gas Consumption Projections by End-Use


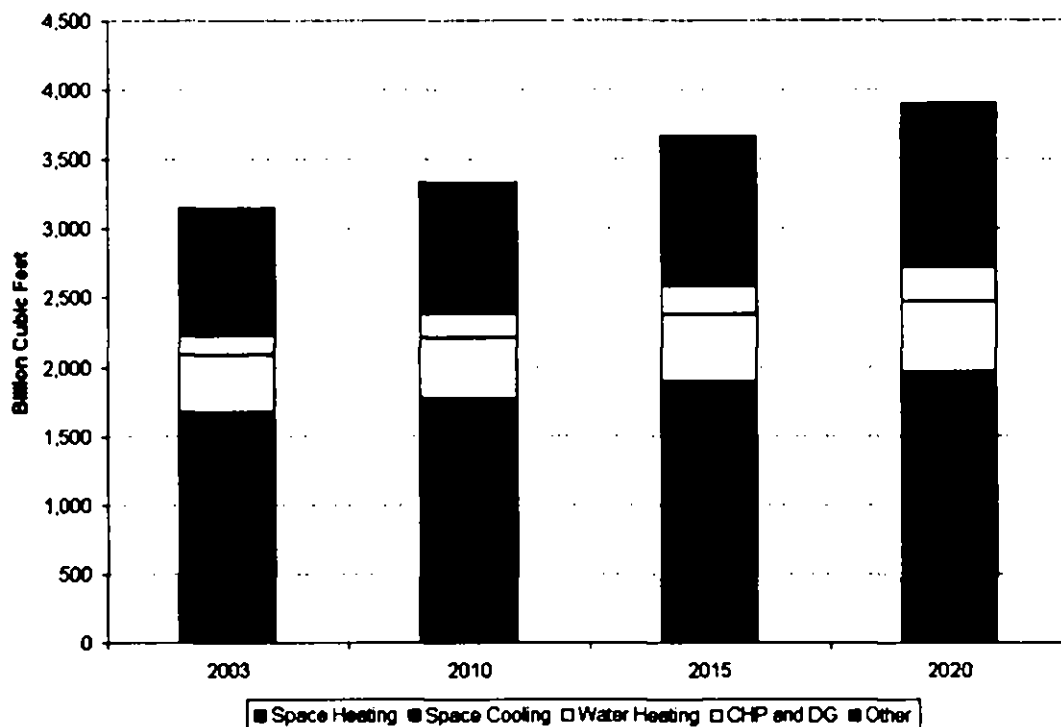


Figure C.1.10 presents the growth in commercial sector gas consumption by region. The region expected to experience the largest growth in commercial gas use is the Mountain (MT) region, followed by the New England (NENG) region. These two regions are projected to grow at an annual rate of 2.3 percent and 2.0 percent, respectively. The current largest consuming regions are expected to have slower growth over this time period, with MATL projected to grow at a rate of 1.2 percent annually and ENC projected to grow by 0.9 percent.

Figure C.1.10 – Commercial Natural Gas Consumption Projections by Region

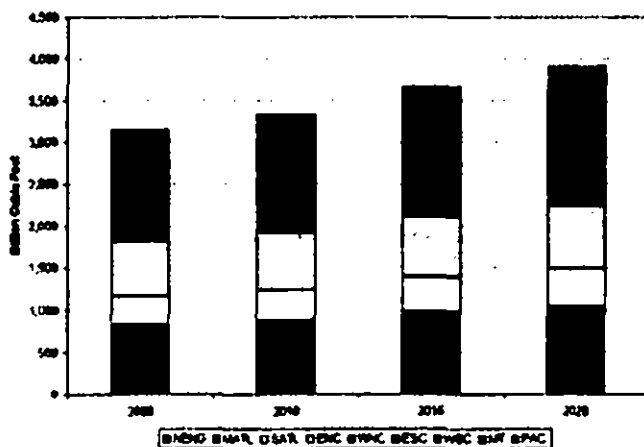


C.1.3 Industrial Sector

Over 210,000 industrial gas users consumed 7.2 Tcf of natural gas in 2003, representing one-third of total U. S. gas consumption. Industrial gas use is comprised of five basic end-use components: 1) boilers used to generate process steam, 2) direct fired process heaters and furnaces, 3) CHP or cogeneration systems producing both electricity and steam, 4) feedstock to manufacture commodity chemicals such as ammonia, methanol, and hydrogen, and 5) other uses comprised of direct space heating and non-CHP power generation.

Figure C.1.11 presents the breakdown of industrial natural gas demand by end-use category. As shown in the figure, the primary use of natural gas in industry is to fuel steam generating equipment including standalone boilers and CHP systems. Almost half (49 percent) of natural gas used in industry is for this purpose: 34 percent through boilers and another 15 percent through non-boiler CHP. Despite fuel oil and coal maintaining their competitiveness and despite increased use of byproduct fuels, natural gas has expanded its role as the dominant fuel source for both boilers and CHP equipment.

Natural gas is also the primary energy source for direct process heating in the sector, accounting for over half of total process heat requirements. Natural gas used for process heating represents over one-third (34 percent) of total industrial gas demand. Although electrotechnologies have slowly gained some ground in certain applications, natural gas has maintained its position as the preferred fuel for most clean, direct thermal heating applications.

Figure C.1.11 – Industrial Natural Gas Consumption by End-Use, 2003

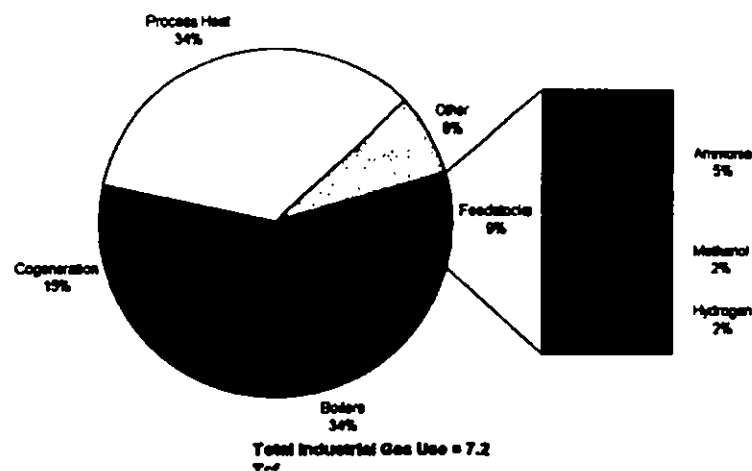

Note: Cogeneration gas consumption includes only non-boiler industrial cogeneration facilities built on or before 1980.
 Boiler gas consumption includes fuel used in standalone boilers and steam-boiler cogeneration.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 98 of 250

As a feedstock, natural gas is predominately used in the production of ammonia, methanol and hydrogen. Feedstock use represents 9 percent of total industrial natural gas consumption. Over half of the feedstock demand is to manufacture ammonia, with the remainder split between methanol and hydrogen.

The other uses of natural gas include direct space heating and on-site (non-CHP) electricity generation. These combined account for 8 percent of total industrial gas use.

Industrial gas consumption is highly concentrated, with only six industries accounting for over 80 percent of industrial gas use. The gas-intensive industries consists of the food, paper, chemical, petroleum refining, stone, clay and glass, and primary metals industries. These industries account for 81 percent of total industrial natural gas consumption. As shown in Figure C.1.12, the chemical industry alone consumes over one-third, 34 percent, of total industrial gas use. The second largest gas consumer is petroleum refining, representing 18 percent of total industrial gas use. The paper, food, and primary metals industries account for 8 percent each, while the stone, clay and glass industry accounts for 5 percent.

Figure C.1.12 – Industrial Natural Gas Consumption by Industry Group, 2003

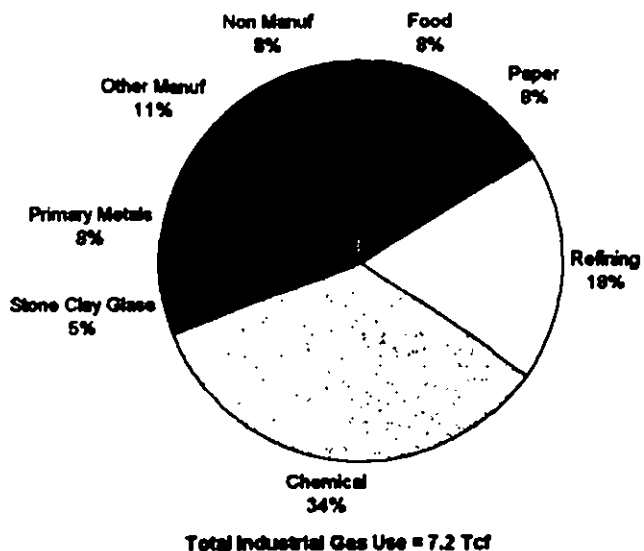



Figure C.1.13 shows the breakdown of gas use in each industry by end-use category. As depicted in the figure, the largest user of natural gas, the chemical industry, consumes most of its gas to produce steam using boilers and CHP equipment. Boilers and CHP end-uses account for over half of the chemical in-

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 99 of 250

dustry's gas consumption. Feedstocks represent a substantial amount of gas use in the chemicals industry as well, accounting for 25 percent. In the refining industry, a majority of gas consumption is to fuel direct process heaters; about 57 percent of the refining industry's use of natural gas is for this purpose. The remainder is used mostly for steam generation through boilers and CHP. For the primary metals industry, its largest end-use is direct process heat, representing almost 70 percent of this industry's total gas consumption. In the food industry, over half the gas consumption is for the production of steam through boilers and CHP. Direct process heating accounts for 39 percent of this industry's gas demand. The paper industry has a substantial steam load; 87 percent of total gas use in paper is for the production of steam through boiler and CHP. The largest use of natural gas in the stone, clay and glass industry is for direct process heating (glassmaking furnaces and cement kilns), accounting for 83 percent of total gas use by that industry.

Figure C.1.13 – Industrial Natural Gas Consumption by Industry and End-Use, 1998

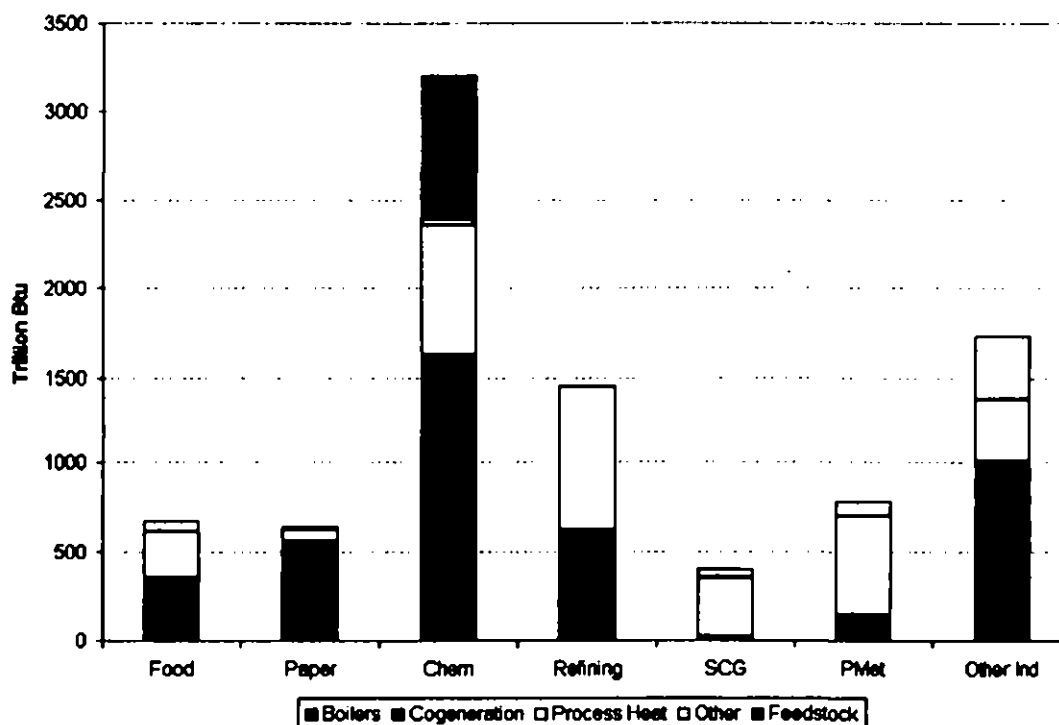

Two regions together account for 54 percent of total industrial natural gas consumption in the U.S (Figure C.1.14). The West South Central (WSC) region represents the largest portion of industrial gas consumption, 2.7 Tcf or 37 per-


White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 100 of 250

cent of total U. S. industrial gas use. Much of this consumption is centered in petrochemical industries which prospered from the availability of abundant and inexpensive local natural gas resources. The East North Central (ENC) region represents the second largest industrial natural gas consuming region, accounting for 1.2 Tcf or 17 percent of total industrial gas consumption. This region is comprised of the food, chemicals, and metals industries, which prefer natural gas not only for its historically competitive pricing, but also because of these industries' use of specific gas applications such as cooking, baking (in the food industry), ammonia production (in the chemical industry), and metal melting and heating (in the metals industry). The third largest consuming region is the Pacific (PAC) region, accounting for 14 percent of total industrial gas use. The presence of a large refining industry as well as gas use in enhanced oil recovery drive industrial gas consumption in this region.

Gas consumption in the industrial sector is primarily driven by the level of industrial production. Energy efficiency improvements are introduced through process changes or evolutionary technical improvements. Energy prices affect energy demand, especially, where the equipment is switchable from one fuel form to another. For example, a large number of boilers and process heaters can switch from gas to oil and vice versa.

Figure C.1.14 – Industrial Natural Gas Consumption by Region, 2003

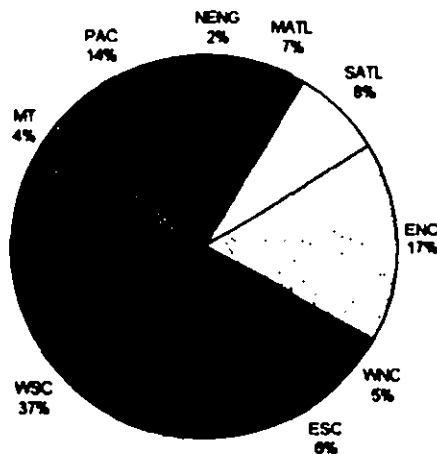


Total Industrial Gas Use = 7.2 Tcf

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use


Exhibit No. FGT-6
 Page 181 of 250

Figure C.1.15 – Industrial Natural Gas Consumption Projections by End-Use

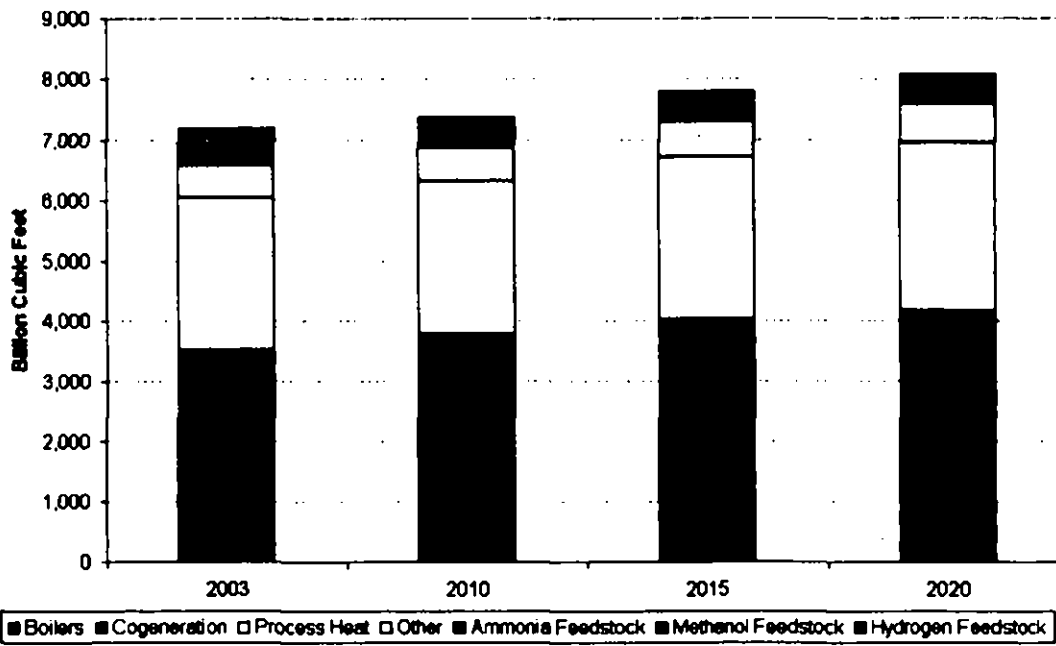

Cogeneration projections do not include new cogeneration capacity installed after 1999. New cogeneration capacity installed after 1999 are included in the power sector projections.

Industrial gas demand is projected to grow to 8.1 Tcf (Figure C.115) by 2020. This represents relatively slow growth, at 0.7 percent annually. It is important to note that this projection does not include new capacity growth of CHP after 1999, since new cogeneration capacity is included in the power generation projections. The largest end-uses of natural gas, boilers and CHP, are projected to grow at a modest rate, with 1.0 percent per year and 0.6 percent per year, respectively. Consumption of gas for process heating is also projected to grow gradually, at about the same rate as industrial CHP consumption. Natural gas

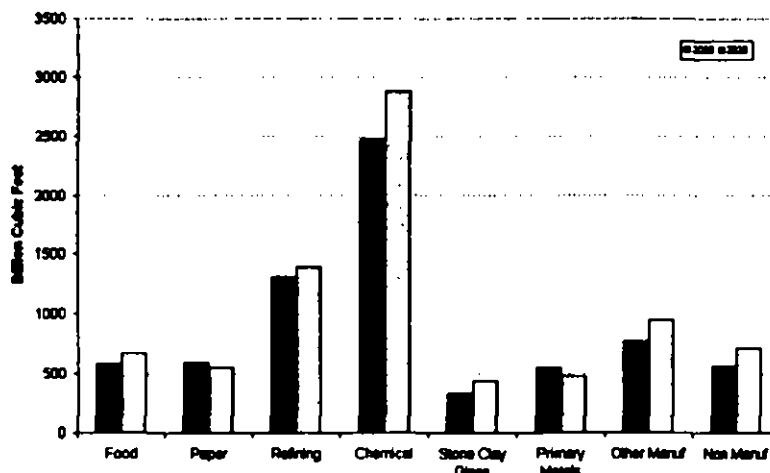

feedstock consumption for ammonia and methanol is projected


Figure C.1.16 – Industrial Natural Gas Consumption Projections by Industry Group

to decline, while feedstock consumption for hydrogen is expected to grow at a fairly rapid rate of 3.0 percent per year.

Figure C.1.16 shows natural gas use over the projection period by industry group. The largest consumer of natural gas, the chemical industry, is expected to increase its gas consumption annually at a rate of 0.9 percent. The refining industry, which is the second largest user of gas, is projected to increase its gas consumption by a much slower rate of 0.4 percent per year. Gas consumption in the stone, clay and glass industry is projected to grow the fastest among the energy-intensive industries at 1.5 percent per year. The food industry is expected to increase its gas use by a rate of 0.8 percent per year. Two energy-intensive industries are reporting declines in projected gas use: paper and primary metals. The non-energy-intensive industry groups report a modest growth in gas use of about 1.3 percent per year.

Figure C.1.17 shows projected industrial gas growth from 2003 to 2020 by region. Each region is projected to grow between 0.5 percent to 0.9 percent per year. The fastest growth in industrial gas use is expected to occur in the Pacific (PAC) region at 0.9 percent per year. The two largest gas consuming regions of West South Central (WSC) and East North Central (ENC) are projected to increase their industrial gas use by 0.7 percent per year and 0.6 percent per year, respectively. The slowest growth is expected in the Mountain region (MT), with an annual rate of growth in industrial gas use of 0.5 percent.

Figure C.1.17 – Industrial Natural Gas Consumption Projections by Region

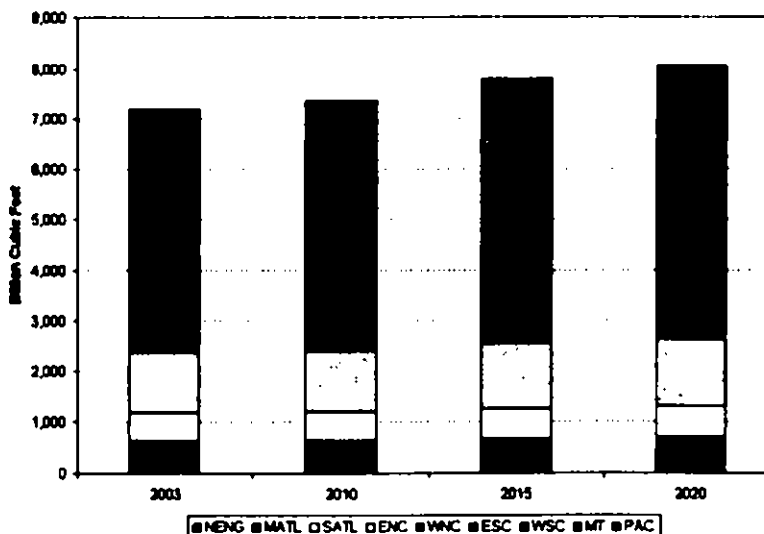

C.1.4 Power Sector

The power generation sector has been steadily increasing its consumption of natural gas over the past decade. Increasing electricity demand, the rapid buildup of gas-fired generating capacity, and more stringent environmental policies, have all contributed to this growth.

Figure C.1.18 shows electricity power generation by fuel type. Currently, the majority (55 percent) of U. S. electricity generation is fueled by coal followed by nuclear at 22 percent and natural gas at 14 percent. While coal-fired generation is expected to increase over the forecast period, its share of total generation is expected to decrease to less than 50 percent by 2020, while gas's share is expected to increase to 25 percent.

Figure C.1.18 – Power Generation Projections by Fuel Type

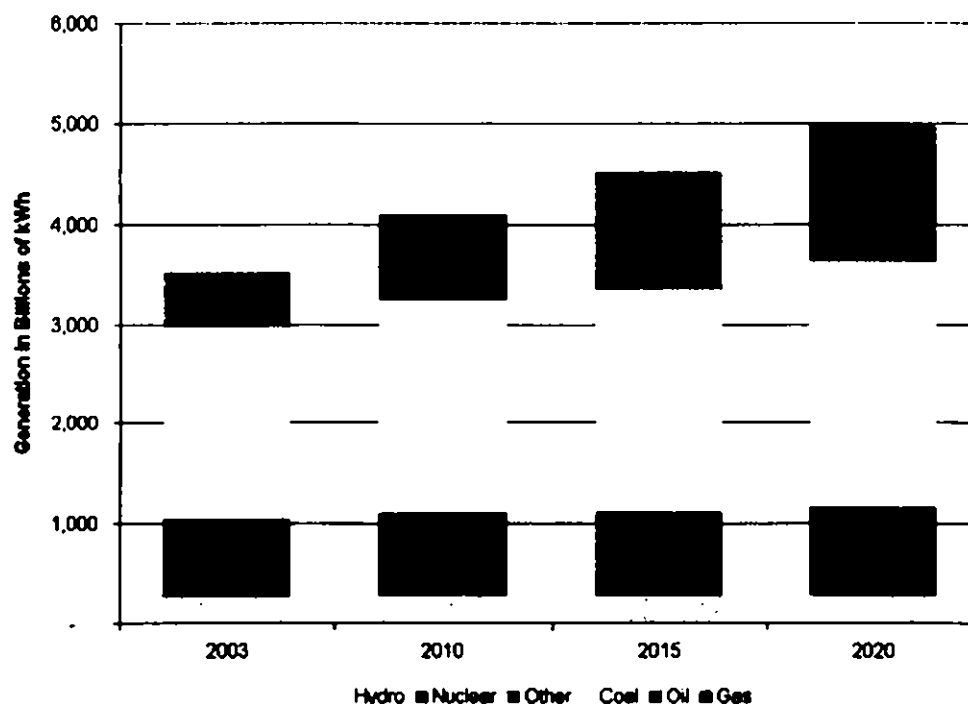


Figure C.1.19 presents the projection of electric generation capacity in terms of gigawatts. The large quantity of natural gas-fired generation capacity installed between 1998 and 2004 drives significant gas demand growth over much of the


White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 104 of 250

forecast period. Between 1998 and the end of 2004, over 210 gigawatts of new single-cycle combustion turbines (CT) and combined cycle turbines (CC) were added to the generation fleet. From 2005 to 2020 it is forecast that an additional 120 GW of CC/CT capacity will be added, bringing the total turbine capacity to nearly 360 GW.

Most of the gas turbines installed through the mid-1990s were single cycle combustion turbines (CT) added as peaking capacity (Figure C.1.20). However, since then the majority of new gas units added have been combined cycle (CC) units serving intermediate and, in some cases, base load demand. While CCs are significantly more efficient than CTs, they also operate many more hours per year, and therefore consume a higher percentage the sector's total gas consumption.

Figure C.1.19 – Electric Generating Capacity

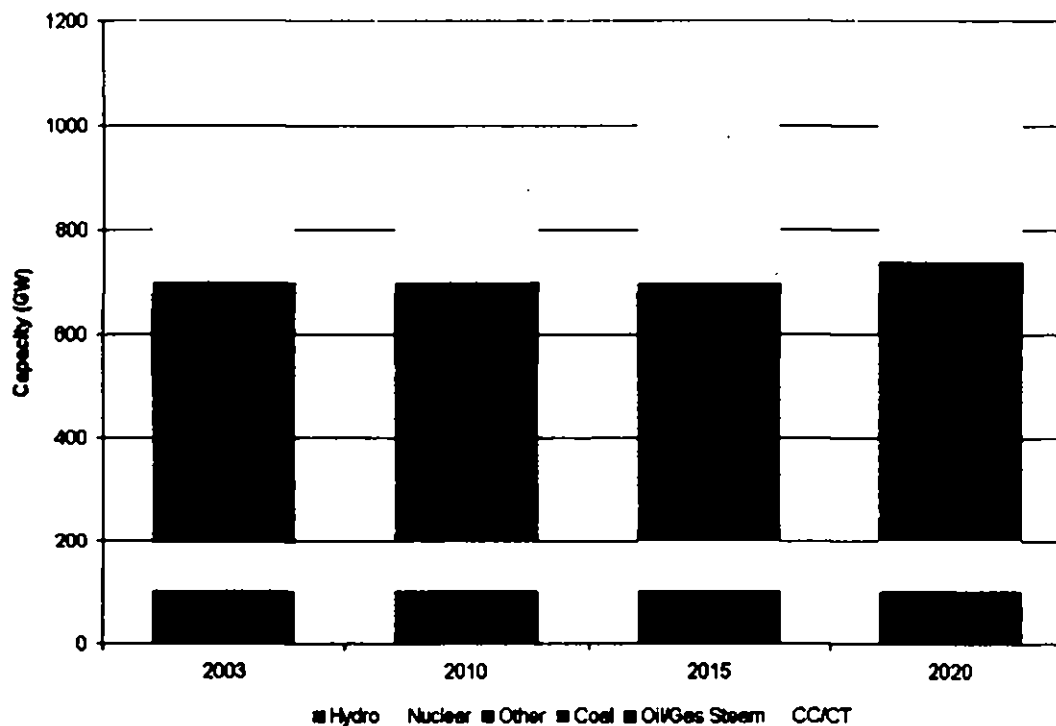

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 185 of 250

Figure C.1.20 – Simple Cycle Versus Combined Cycle Capacity


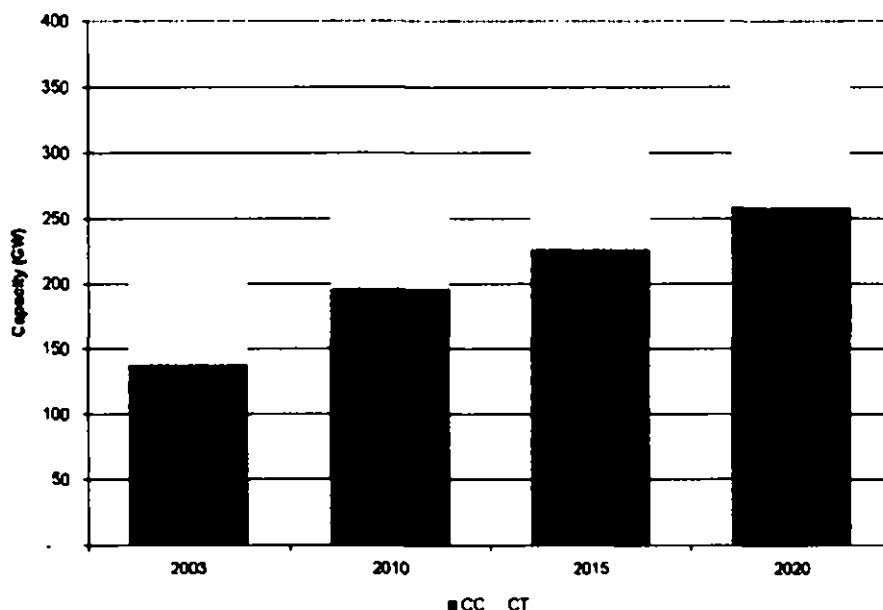


Figure C.1.21 shows the projection of the electric power sector's gas demand by technology. At the same time new gas-fired capacity is being added, older steam turbine units are being retired from the fleet. While the older steam turbines are far less efficient than the new units, a high percentage of the steam units can switch to oil at times of high gas prices, a feature that is rare in new CC and CT units. Therefore, the replacement of

Figure C.1.21 – Power Sector Natural Gas Consumption Projections by Technology steam

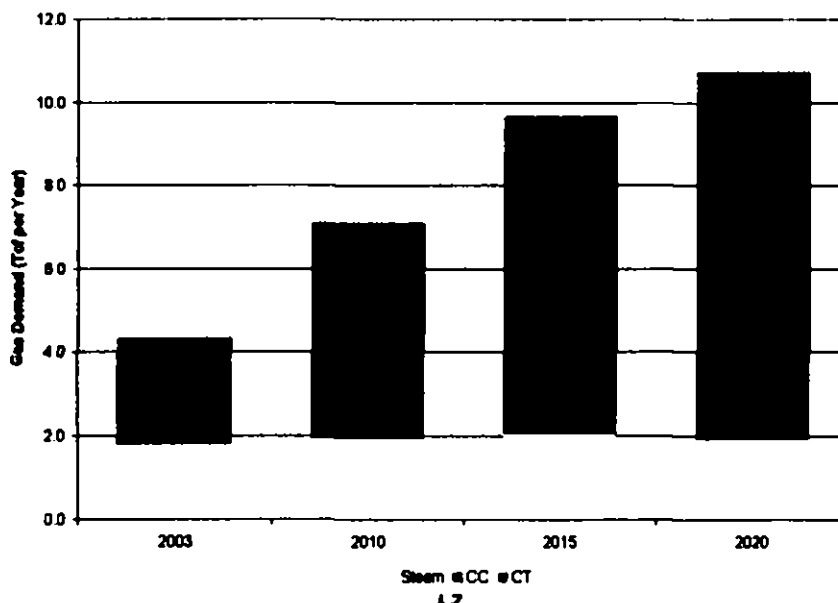


White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 108 of 250

turbines with CC and CT units tends to increase gas-fired generation at the expense of oil generation. While gas consumption at steam units remains fairly constant throughout the forecast, gas consumed by CCs increases from 1.9 Tcf in 2003 to 7.9 Tcf by 2020. Gas consumption by CTs rises at a more modest pace, increasing from 0.7 Tcf in 2003 to 1.0 Tcf by 2020.

Power generation gas consumption also varies significantly by region (Figure C.1.22). As of 2003, the Western Electricity Coordinating Council (WECC) dispatch area consumes the majority of gas used in the power sector, followed closely by ERCOT (Texas).

Figure C.1.22 – Power Sector Natural Gas Consumption by Region

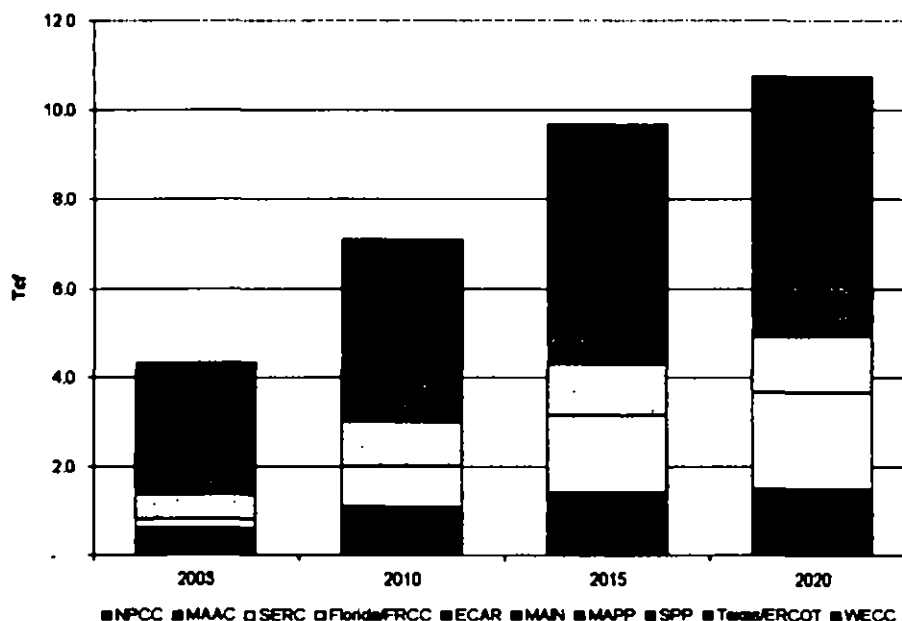


Differences in regional growth in gas consumption are largely driven by different growth rates for electricity demand. For the U. S. as a whole, demand for electricity is expected to grow at a rate of 1.9 percent per year over the forecast; however, regional growth rates vary from a high of 2.2 percent (in SERC, Florida and WECC) to a low of 1.5 percent (ECAR). (Figure 23)

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 107 of 250

Figure C.1.23- Regional Shares of Power Sector's Natural Gas Consumption, 2003 and 2020

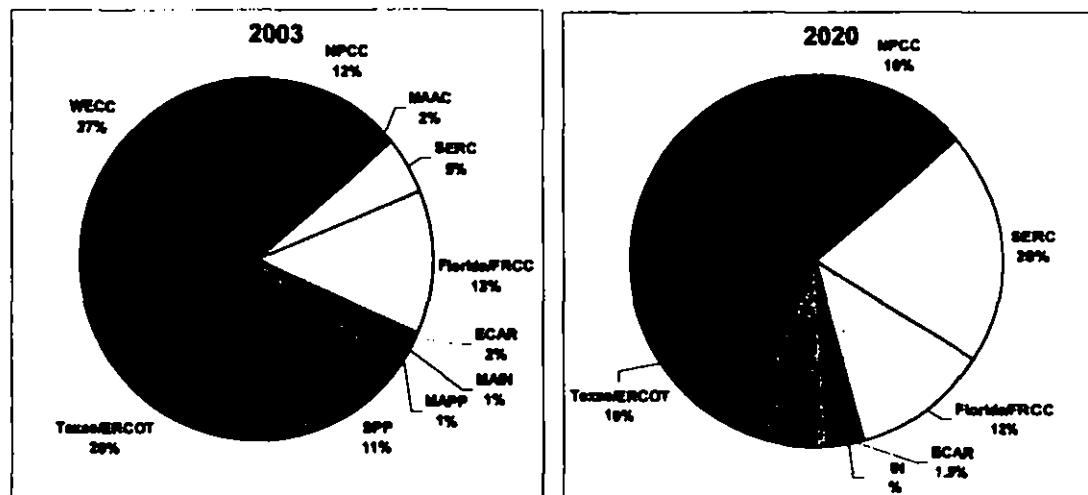

While gas consumption is expected to increase in all regions, it is expected to grow most quickly in the Southeast. The Southeastern Electric Reliability Council (SERC) is forecast to increase its gas consumption by nearly 2 Tcf per year, to 2.2 Tcf by 2020. Florida/FRCC also has significant growth in consumption, increasing to 1.3 Tcf by 2020. Texas, a state that has historically been a large consumer of gas for power generation, increases its annual consumption to 2.0 Tcf by 2020. In both percentage and absolute terms, SERC is by far the fastest growing area. By 2020, SERC will consume 20 percent of total U. S. power generation gas use, up from only 5 percent in 2003.

Table C.1.1 Electricity Sales by Region, in Millions of kWh

	2003	2020	Annual Percentage Growth Rate
NPCC	263	349	1.7%
MAAC	299	393	1.6%
SERC	695	998	2.2%
Florida/FRCC	215	308	2.2%
ECAR	394	510	1.5%
MAIN	208	286	1.9%
MAPP	219	299	1.8%
SPP	258	348	1.8%
Texas/ERCOT	325	454	2.0%
WECC	619	896	2.2%
U.S. Total	3,495	4,842	1.9%

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 108 of 250

C.1.5 Transportation Sector

Natural gas vehicles (NGVs) have slowly penetrated certain fleet vehicle and urban transit bus markets in recent years. According to the Natural Gas Vehicle Coalition, there are almost 60,000 NGVs currently in operation in the U. S. The U. S. Postal Service currently operates the nation's largest fleet of natural gas vehicles and United Parcel Service (UPS) operates the largest private fleet. Furthermore, utilities, airport shuttle services, taxi companies, police departments, school districts, and ice rinks also operate large fleets of natural gas vehicles. A prominent off-road application of NGVs is forklifts in warehouse operations.

There were approximately 6,200 natural gas transit buses operating in the U. S. at the end of 2001. Natural gas buses represented approximately 11 percent of total transit buses and 97 percent of all alternatively fueled transit buses. At the beginning of 2002, an additional 1,313 natural gas transit buses were on order. Almost 21 percent of all transit buses on order are natural gas powered.

The Energy Information Administration (EIA) reports that natural gas consumption (compressed natural gas) in the transportation sector was around 21 Bcf in 2003. This is significantly smaller relative to the consumption of natural gas in the other sectors. EIA projects that compressed natural gas consumption in the transportation sector will reach 96 bcf by 2020, or grow at an annual rate of 9.4 percent. EEA believes that EIA's projections are overly optimistic. Although, there has been some success in the use of natural gas powered vehicles, it is expected that the success will not be maintained over the projected period (2003 to 2020). Some of the factors that are expected to impede the success of NGVs in the future include continued high up-front costs, ongoing problems with refueling infrastructure, penetration of new and more competitive options like hybrids, performance issues (e.g., driving distance range), and volatile natural gas prices.

C.1.6 Gas Transmission

The process of extracting and delivering natural gas consumes substantial amounts of natural gas. There are three types of natural gas consumption in gas transmission: plant fuel, lease fuel, and pipeline fuel. Plant fuel is natural gas consumed as fuel by heaters and compressors in natural gas processing plants. Lease fuel is gas consumed in operating well and field gathering systems. Pipeline fuel is natural gas consumed in the operation of pipelines, primarily compressors. Lease and plant fuels are usually reported combined and referred to as lease and plant. Nevertheless, as a general assumption, 65 percent of the total


White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-8
 Page 109 of 250

lease and plant consumption is lease fuel and the remainder (35 percent) is plant fuel.

Total pipeline and lease and plant consumption in 2003 was 2.0 Tcf, with 1.2 Tcf lease and plant fuel and 0.8 Tcf pipeline fuel. Figures C.1.24 and C.1.25 show the regional breakdown of lease and plant fuel and pipeline fuel, respectively.² The West South Central region reports the largest lease and plant gas consumption, followed by the state of Alaska. These two regions combined account for 52 percent of total lease and plant gas consumption in the U. S. Pipeline consumption is more equally distributed regionally, although the West South Central region reports the largest pipeline fuel consumption, accounting for 11 percent of total U. S. consumption. Other major regions are the Midwest, East South Central, Central, and Southwest.

Figure C.1.24 – Lease and Plant Consumption by Region, 2003

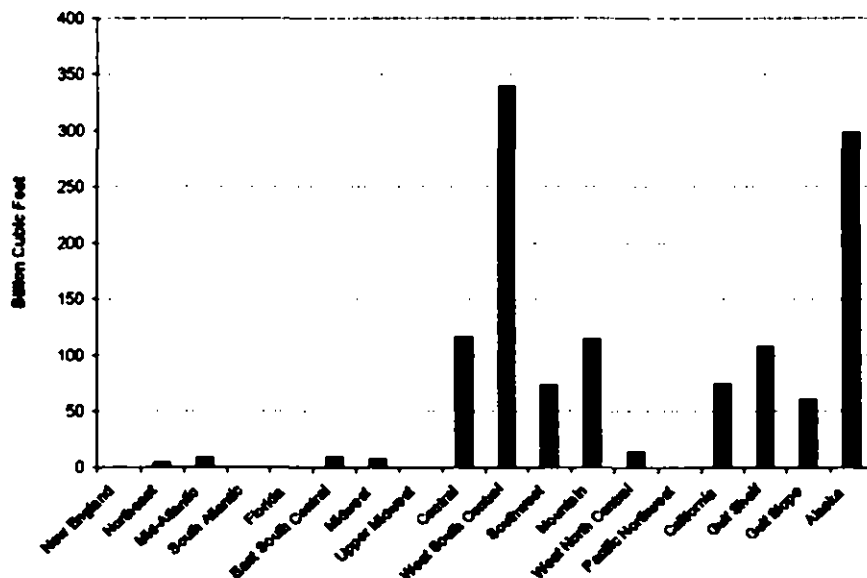

² The definitions for the regions are different from those used in the residential, industrial and commercial sectors analysis. The regional breakdown used for the residential, industrial and commercial sectors follow the Census Division definitions. The regional definitions used for the Gas Transmission analysis are provided in the Appendix.

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-5
 Page 110 of 250


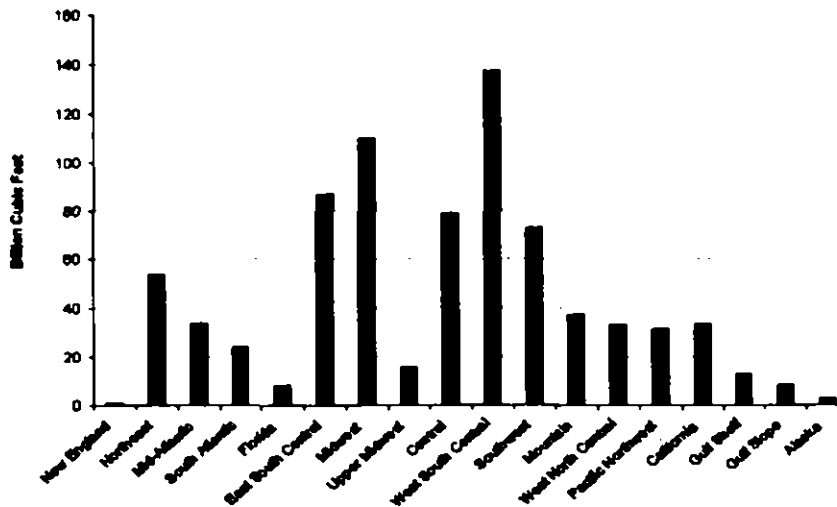


Figure C.1.25 – Pipeline Fuel Consumption by Region, 2003


Over the projection period (2003 to 2020), lease and plant fuel consumption is projected to increase by only 42 bcf, or 0.2 percent per year. Lease and plant fuel use in the West South Central region will decline while its use in Alaska will remain fairly flat. Increases in lease and plant fuel use are expected in the Mountain and Gulf Slope regions. Figure C.1.26 shows the lease and plant fuel consumption projections by region.

Figure 26 – Lease and Plant Fuel Consumption Projections by Region

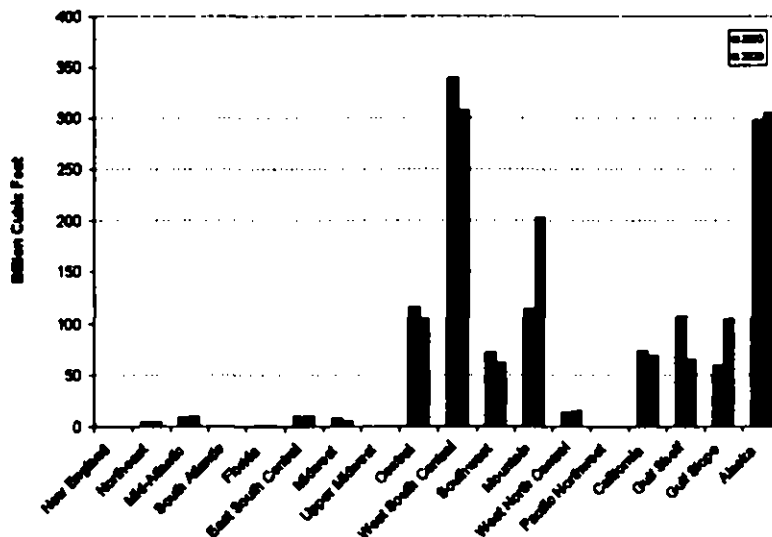

Pipeline fuel consumption is projected to increase at a higher rate than lease and plant consumption. From 2003 to 2020, pipeline fuel consumption will grow annually at a rate of 1.5 percent. Alaska and New England are expected to show the largest growth rate (17 percent per year and 8 percent per year, respectively). Figure C.1.27 shows the pipeline fuel consumption projections by region.

Figure C.1.27 – Pipeline Fuel Consumption Projections by Region

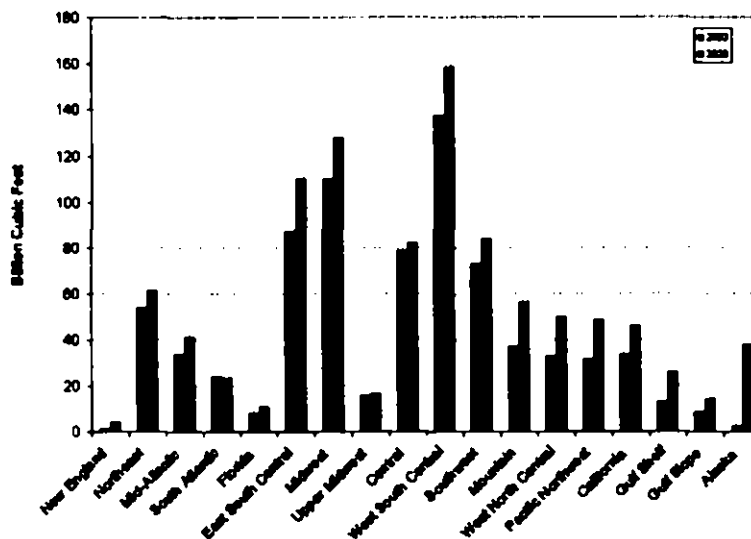

C.1.7 Natural Gas Processing Trends

Natural gas at the wellhead consists of a number of different chemical compounds, including methane (natural gas), ethane, propane, butane and pentanes. The bulk of the hydrocarbons other than methane are removed from the natural gas stream, for use as petrochemical feedstocks, and to control the quality of the natural gas stream. During previous high gas price periods, a significant amount of these hydrocarbons have been left in the gas stream, sometimes creating operational difficulties for pipelines, utilities, and end-users.


U. S. ethane production at gas processing plants represents the Btu equivalent of about four percent of total U. S. natural gas production. Ethane is generally considered to be a high value product, and most of the ethane produced with the production of natural gas is removed and sold as a petrochemical feedstock. However, the ethylene market, (the primary use of ethane) is an international market, and high domestic natural gas prices make U. S. ethylene production non-competitive with other international sources. This makes removing ethane from natural gas uneconomic under high gas price conditions.

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 112 of 250

Figure C.1.28 shows the relationship between U. S. ethane production and price. On average, ethane prices are about \$0.50 per mMBtu higher than natural gas prices. However, during high gas price periods, natural gas prices can exceed ethane prices. In the last several years, ethane production has declined during high natural gas price periods by as much as 10 million barrels per month (about 900 MMcf of natural gas equivalent), with the additional ethane left in the natural gas stream to boost natural gas supplies. Additional propane, butane and pentanes have also been left in the natural gas stream during these periods.

Figure C.1.28 – Relationship Between U. S. Ethane Production and Price

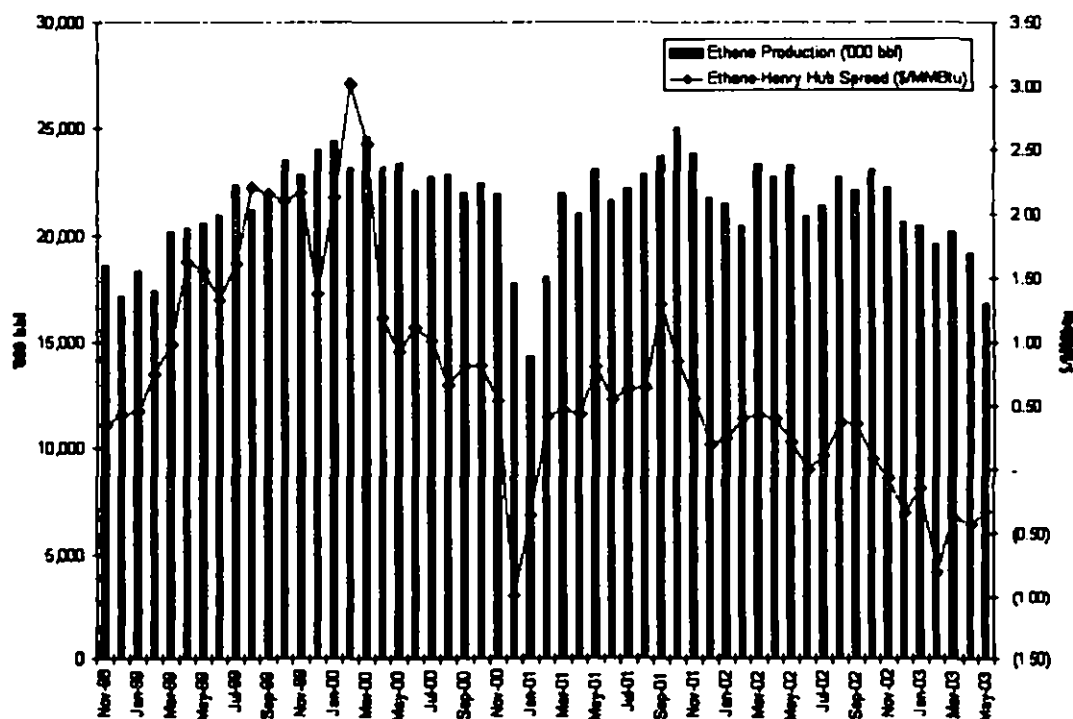

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 113 of 250

Addendum

I. Census Division Definitions

New England = CT, ME, MA, NH, RI, VT
Middle Atlantic = NJ, NY, PA
East North Central = IL, IN, MI, OH, WI
West North Central = IA, KS, MN, MO, NE, ND, SD
South Atlantic = DE, DC, FL, GA, MD, NC, SC, VA, WV
East South Central = AL, KY, MS, TN
West South Central = AR, LA, OK, TX
Mountain = AZ, CO, ID, MT, NV, NM, UT, WY
Pacific = AK, CA, HI, OR, WA

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 114 of 250

C.2 Appliances

Mark Kendall, GAMA
Ted Williams, AGA

C.2.1 The Appliance Market

Appliances that are used to heat building space and water, cook food, and dry clothes consume one-third of the natural gas consumed in the U. S. There are more than 160 million gas-fired appliances installed in U. S. households and 14 million new appliances installed each year. Residential appliances are generally produced in central locations based on standardized designs and are sold nationally. Water heating and space heating appliances are the largest consumers of natural gas in the residential sector (93 percent of residential appliance gas consumption) followed by cooking appliances (4 percent) and clothes dryers (1 percent), although the number of installations of ranges and clothes dryers (30 million and 15 million, respectively) are comparable to the number of installations of water heaters and furnaces (60 million and 45 million).

In the commercial sector, nearly 8 million buildings have some type of gas space heating or water heating appliance installed. Like the residential sector, appliances in the consumer sector are generally produced in a central location based on a standardized design and sold across the country. Larger heating boilers and water heaters, however, may be partially erected on site and engineered for each specific application.

From a gas interchangeability perspective, there are several characteristics to consider relative to appliances:

- Performance (heat output, energy efficiency, noise)
- Durability and reliability (premature failure or shutdown of components due to corrosion, erosion, fatigue, gas pressure, or operating temperature)
- Consumer safety (fire, increased release of CO and other toxins or irritants into the occupied space)
- Environmental impacts (increased release of NO_x, CO, particulates and other pollutants into the atmosphere)
- Initial installation conditions and adjustment.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 115 of 250

Different appliance markets and different applications are more sensitive to changes in these factors. For instance, emissions from unvented appliances (e.g. residential ranges and ovens and unvented space heaters and commercial direct-fired makeup air heaters), and consumer safety associated with those emissions, are more of a concern than in vented appliances (furnaces, boilers, and water heaters).

Each market sector has a different capacity to deal with changes in gas characteristics. The commercial sector is more likely to conduct routine maintenance and adjustment and perform proper appliance commissioning procedures than is the residential sector, where appliance are sometimes installed by homeowners and serviced only when they stop working.

C.2.2 Market Trends

U. S. clean air regulations and concerns over the health effects of indoor NO_x are putting pressure on appliance manufacturers of all types to reduce NO_x production to very low levels. For example, in California, the South Coast Air Quality Management District requires that all residential furnaces and water heaters sold in the district limit NO_x emissions to no more than 40 nanogram per Joule of heat output. The regulations for water heaters drops to 10 nanogram per Joule in 2006.

The U. S. also regulates the energy efficiency of gas appliances. Higher efficiency designs, because of their more precise control and components, are likely to be more sensitive to changes in gas composition. By law, energy efficiency regulations can only become more stringent, and increases in the price of natural gas result in more market demand for highly efficient products, regardless of regulations.

Appliances react differently to changes in gas composition largely because of the characteristics of their component technologies. The next section describes those differences.

C.2.3 Technologies

The design and construction of four classes of components affect the way appliances react to changes in gas characteristics:

- Burners
- Heat exchangers and combustion chambers

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 116 of 250

- Flues and vents
- Safety components.

Burner design is the most important.

C.2.3.1 Burners

From the perspective of gas interchangeability, appliance burners are generally classified based on the relative fuel-air mixture (i.e. the equivalence ratio) at which they are designed to operate cleanly, efficiently, safely, and with a minimum production of pollutants as described in Appendix D. The classifications are:

- Partial premix (excess fuel)
- Lean premix (excess air).

The vast majority of appliances installed in residential applications use partially premixed burners with an equivalence ratio greater than one. Appliances using partial premix burners are more forgiving to changes in gas composition and increases in the Wobbe Index than are lean premix burners. NO_x control in residential appliances is usually accomplished through the insertion of a ceramic device into the flame to reduce flame temperature and associated thermal NO_x formation.

The trend in new appliances, particularly commercial heating appliances because of NO_x and efficiency regulations, is toward lean premix burners. These burner types have a narrow range of operation that is difficult to meet even with the current gas supply. Typically they have a 60-80 percent primary air mixture. Some low NO_x burners induce a controlled amount of flame lifting to reduce the heat at the burner port. Using nitrogen blending to control Wobbe, thereby increasing the nitrogen content of the natural gas relative to design conditions, can increase the lift index of the burner. An increase in lifting can extinguish the burner and may make it impossible to light (incombustible at port).

Range burners are very common in households throughout the U. S. and are normally unvented except for the incidental venting performed by kitchen ventilation systems. It is therefore essential that ranges be designed such that combustion of the fuel gas is clean and complete, without generation of by-products.

To counter the effects of periodic gas properties changes, burner tubes can be provided with adjustable vanes to allow the flow of primary air to be regulated,

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 117 of 250

reducing some of these problems. These vanes are however, intended for the initial set-up of an appliance against a known gas specification, not for the day-to-day compensation that would be needed for multiple variations in gas composition. Alternative gas nozzles/orifices are also usually available, but they are intended to allow for variances between compositionally different gas types such as natural gas and propane, and are normally changed only by a qualified technician. While vane adjustment can be used to accommodate infrequent changes in gas composition, this is not a viable solution for frequent modification of home appliances, due to the necessity to involve personnel trained in the procedure.

C.2.3.2 Heat Exchangers and Combustion Chambers

The most prevalent types of heat exchangers currently used in the United States for space heating are tubular and clamshell or serpentine exchangers. The vast majority of commercial products use tubular heat exchangers with induced draft inshot (single port) burners³. At the large end of the capacity range, it is common to use a drum type combustion chamber joined to a tubular secondary heat exchanger, and fired with a power burner. Residential equipment is split between the two types of exchangers, with the majority as stamped steel clamshell/serpentine. Aluminized steel (most common) and 409 stainless steel (condensing equipment) are the primary materials used in contemporary heat exchangers.

Modern heat exchangers have tighter internal passageways that make them more susceptible to clogging from soot. Soot produced from yellow tipping, is typically combusted in the secondary flame front; however, in some instances the soot does not fully combust and the deposits affect the appliances operational lifetime and performance.

C.2.3.3 Flues and Vents

The products of combustion of vented appliances are exhausted to the outdoors through the appliance flue and its venting system. The most prevalent vent systems used for residential appliances are masonry chimneys (lined or unlined) and B-vents⁴ in which flue products are vented at a negative pressure relative to the ambient air. For commercial vents the most common is a pressure stack stainless steel, which operates under positive pressure.

³ In inshot burners, one long flame is directed into the heat exchanger after ignition. "Induced draft" means that the combustion products are evacuated from the chamber by a fan located in the appliance flue downstream of the combustion chamber. The flow through the fan is not sufficient to pressurize the venting system.

⁴ B-vents are double wall, rigid vents, usually of galvanized steel that are suitable only for negative pressure service.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 118 of 250

The degree of pressurization and the temperature of the flue gases determine the requirements for the venting system. If flue gas temperatures are low enough, condensation can occur in the venting system. Condensation of flue gases in the vent can lead to corrosion and premature vent system failure.

Gas composition can adversely affect venting systems by increasing flue gas temperatures and increasing the presence of corrosives that could condense in the vent.

High efficiency condensing appliances, which are popular in the residential furnace market (over 1 million sold each year) are designed to cool the flue gases to the point of condensation within the appliance. Since flue gases are designed to leave the appliance at nearly room temperature and free of condensate, vent systems can be constructed of ordinary polyvinyl chloride (PVC) and CPVC (chlorinated polyvinyl chloride) plastic vent pipe.

C.2.3.4 Safety Systems Components

All gas appliances are equipped with safety devices that act to prevent uncontrolled ignition or shut down the equipment when abnormal and potentially dangerous operating conditions are present. Among these are high-temperature switches that can fail to function if they are chronically overheated.

C.2.4 Appliance Certification Testing

C.2.4.1 Industry Standards Processes

There is no mandatory national requirement in the U. S. for the application of a specific set of design or safety standards to gas appliances, nor for the testing and listing thereof. The federal government has the authority to regulate the safety of consumer products, but has elected at various times not to exercise that authority in the case of gas appliances. The Consumer Products Safety Commission contemplated the promulgation of standards for gas cooking products during the 1970's, for example, but was satisfied with the appliance industry's record in the maintenance of and compliance with voluntary standards, so it has not proceeded further.

In practice however, virtually all building codes at state or city levels require that installed products be tested to relevant product-specific safety standards and marked by a recognized testing authority. The most prominent of these are Underwriters Laboratories, CSA America, and Intertek Testing Services. Additionally,

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 119 of 250

it is unlikely that any reputable retail concern would stock gas appliances that had not been examined and listed by a competent and nationally recognized laboratory. The "voluntary" system for certifying the safety of gas appliances therefore is effectively "mandatory" across the U. S.

The ANSI Z21/83 standards committee and CSA America share the development of the design and safety standards universally accepted by U. S. industry and the testing laboratories. These standards are maintained and developed under American National Standards Institute consensus procedures. The Z21/83 committee is comprised of nearly 40 individuals representing manufacturers, testing laboratories, safety organizations, and other interested parties. All proposed changes are subjected to peer and public review through the ANSI process prior to any revisions of the standards.

In addition to the Z21/83 standards, CSA America and Underwriters Laboratories also maintain standards addressing types and components of gas appliances not covered by Z21/83. The more popular of these standards are also usually ANSI standards subject to the consensus process.

C.2.4.2 Tests and Test Gases

Although the gas appliance standards cover all aspects of the design, construction, and performance of the appliances, the aspects of the standards most sensitive to gas interchangeability are performance-based. In other words, rather than just assessing the design and construction of the appliance, the standards require the testing agency to operate the appliance using a set of test gases and under different gas pressures, operating conditions, and venting conditions to be sure that the appliance performs within specifications of safe operation.

The standards as currently published assume the use of natural gas as supplied from traditional US domestic sources. The representative gas prescribed is Test Gas "A", which has a heating value of 1,074 BTU/ft and specific gravity relative to air of 0.65 (equivalent to a Wobbe of 1,333, which is near the U. S. mean of 1,336). Operational tests are performed using Test Gas "A" at normal (7" water column), reduced (3.5" water column) and increased (10.5" water column) gas supply pressures with the burners at maximum rated output to verify freedom from the following performance defects: excessive carbon monoxide emission; flashback; flame lifting, floating, or blowing; flame rollout; yellow tipping; soot generation; noise generation; interaction between burners; extinguishing of flame through drafts or sudden changes in air pressure; lack of flame stability; and ignition/re-ignition difficulties.

Tests are also performed to confirm that external surface temperatures in operation are within prescribed limits. Additionally, for ranges and space heaters,

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 120 of 250

there is a clothing ignition test that simulates the action of a user leaning across the cooktop or surface of the heater while the burners are in use.

In addition to the safety evaluations performed using Test Gas "A", a flashback test is performed using Test Gas "G" which is a butane/air mix having a heating value of 1,400 BTU/ft and a specific gravity of 1.42 (Wobbe of 1,175, which is 12 percent below the traditional range of U. S. natural gas). Yellowtipping is usually severe with Test Gas "G", but sooting is not acceptable. Besides flashback and ignition, other safety and emissions tests are not conducted with Test Gas "G".

Unlike Europe, the U. S. standards do not test appliances with "limit" gases that represent a conservative range in gas characteristics that the appliance may see during its lifetime. During the history of the appliance safety standards, there have been occasions that the Z21/83 committee has considered adding limit gases to the standards, and a great deal of work has been done to define what appropriate limit gases would be. The U. S. approach of testing with "point" gases provides little assurance regarding the safe operation of appliances when burning natural gas whose composition departs significantly from Test Gas "A."

Subjecting appliances to a battery of safety tests at minimum gas pressures and maximum input rates provides some indication of how the appliances would perform if the pressure remained constant but the Wobbe value of the gas was changed instead. Ideally, input rate varies in direct proportion to a change in Wobbe. Therefore, an increase in input rate of 12% should be roughly equivalent to an increase in Wobbe of 12% for many gas burner designs.

Table C.2.1 provides the range of input rates or gas pressures at which common gas appliances are tested using Test Gas "A." Note that residential boilers and water heaters are not evaluated for safety at increased firing rate, except for their CO emissions. No products undergo a full battery of testing at decreased firing rates, although all are tested for safety at high and low gas inlet pressures, as mentioned above. Changes in gas inlet pressure are partially or totally compensated for by the gas controls, so there may be no effect on the gas manifold pressure or the firing rate of the appliance. Any effects due to changes in firing rate are evaluated, but the actual firing rates are not recorded. Limited tests for flashback and ignition are tested at 87% of rated input for some appliances.

Table C.2.1 Safety Tests at Increased Firing Rates for Selected Gas Appliances

	Highest Tested Input Rate Relative to Rated Input	Z21/83 Standard Reference
Boilers (residential, light commercial)	106.25% (CO test only)	Z21.13-2004 (2.3.1 Table XIII, 2.4.1)
Direct-fired makeup air heaters,	No test	Z83.18-2000

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 121 of 250

recirculating		
Furnaces (residential)	112%	Z21.47-2003 (2.5.3, Table X)
Ranges and ovens (residential)	112%	Z21.1b-2003 (2.3.3, Table X)
Unvented room heaters	112% 123% (CO test only)	Z21.11.2b-2004 (2.3.3, Table XI)
Vented space heaters	112%	Z21.86b-2002 (2.3.3, 2.3.5, Table X)
Water heaters (commercial)	106.25% (CO test only)	Z21.10.3-2001 (2.3.1, Table XI, 2.4.1)
Water heaters (residential)	106.25% (CO test only)	Z21.10.1-2004 (2.3.1 Table IX, 2.4.1)

C.2.5 Installation, Commissioning, and Maintenance Practices

Gas composition and altitude, which also affects appliance operation, have always varied across the United States. Since most appliances are produced centrally and sold nationally, and since the appliance safety standards do not test the appliances for safe performance under the full range of U. S. conditions, the approach taken by the appliance standards and building codes to help ensure proper performance in the field is to require installers to adjust the appliance for proper operation at the time of installation. This one time adjustment does not address changes in gas composition over the life of the equipment.

Installation procedures for residential and commercial natural gas appliances throughout the U. S. are prescribed by state and local installation codes and appliance manufacturer installation instructions. State and local codes are commonly based on model codes, principally the National Fuel Gas Code (NFGC), ANSI Z223.1/NFPA 54. Required procedures in installation codes and manufacturer installation instructions address combustion behavior as part of installation. Combustion issues associated with gas composition and burning properties are addressed by general requirements for setting the appliance "on rate" (i.e., matching Btu input – Btu content of gas times flow rate – to the appliance nameplate rating), observing flame characteristics, and making adjustments to achieve acceptable behavior. The practice of flame observation and adjustment has been used in end use gas service for newly installed space heating and water heating appliances for decades and has provided the basis for accommodating variations in local natural gas compositions.

The documented qualifications of technicians many vary. Although there are licensing requirements in many jurisdictions, in many cases, there is no assurance that a particular technician can properly set up a given appliance. This concern is most applicable in the residential sector, where more products are installed and there is a severe shortage of qualified technicians. The extent of appliance main-

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 122 of 250

tenance also varies. Both of these situations affect appliance performance in the field. One survey conducted by a gas utility in the Northeast, for instance, observed a marginal or non-compliant yellow flame in 9 to 13 percent of installed appliances in its service territory, indicating overfiring. Five to 9 percent had marginal or non-compliant CO emissions. If this one survey is representative of all appliances in the nation, 10 percent of the appliance population would be 16 million appliances. Marginal or already non-compliant appliances are of particular concern when a non-traditional gas is introduced.

The U. S. approach to appliance installation and commissioning is described below.

C.2.5.1 Installation Codes and Practices

The National Fuel Gas Code has procedures for checking input rate with and without the use of the installed gas service meters. These procedures precede final adjustment for proper flame behavior and provide an initial means of addressing local gas composition. The installer should obtain this information from the gas supplier; however, an assumption of 1,000 BTU/scf and a specific gravity of 0.60 for "utility gas" are commonly used. This combination of assumptions would tend to result in appliances being overfired by 4 percent compared to the firing rate that would be realized if appliances were adjusted to the U. S. "average" national gas.

Appliance installation codes cover installation alone and not maintenance. Putting the appliance "on rate" may be accomplished on some appliances by adjusting the manifold pressure or primary air shutters to achieve a target gas flow rate through the gas meter. Along with adjustments to the pressure regulator, if such adjustments are possible, discrete changes in firing rate may be accomplished by replacing the gas orifice. Additional information on primary air adjustment on burners with air shutters is provided in the National Fuel Gas Code Handbook.

When the installer achieves the target input rate, the installer should still check the flame and make any necessary adjustments until a proper flame color and shape is observed.

Appliances served by inputs above the rate specified on the nameplate and the tolerances allowed in its design certification (i.e., "overfired") may be expected to exhibit incomplete combustion behavior. Installation codes therefore require that the appliance input rate not exceed its nameplate rating by more than the amount allowed in the applicable design standard.

C.2.5.2 Installation Instructions

Installation codes also usually require that installers follow manufacturer instructions, even if they are more stringent than what is required by the installation code. Manufacturers' installation instructions document a wide variety of installation requirements and maintenance recommendations for residential and commercial appliances. Minimum requirements for installation instructions are specified in the relevant design certification standards. Specific requirements vary according to the Z21/83 standard of the appliance's listing.

To maintain appliance durability and performance, manufacturers often provide instructions for putting appliances "on rate" with more precision than the safety standards require. Manufacturers typically expect that an installer following their instructions will be able to place the appliance to within +/-2 percent of the specified firing rate.

Markings on most instructions include required wording that "installation and service must be performed by a qualified installer, service agency or gas supplier."

C.2.5.3 Flame Adjustment by Visual Means

For many years, gas utility training and service organizations have emphasized identifying abnormal flame behaviors including flame lifting, flash back, yellow tipping, and adjustment to proper appearance as part of training of service personnel. One established objective source for visual interpretation of normal and abnormal flame behaviors, published in 1950, is the AGA Flame Code classification method, recently applied in interchangeability studies by GTI.⁵

Another source depicting normal and abnormal flames with color photography is a U. S. Environmental Protection Agency publication, "Guidelines for Adjustment of Atmospheric Gas Burners for Residential and Commercial Space Heating and Water Heating," published in 1979.⁶ While burner adjustment to flame appearance depends upon the subjective interpretation of installation and service technicians, relatively consistent performance in terms of more objective criteria (e.g., calculated air-free CO emissions based on CO measurements in combustion products) is generally achieved. Again, such adjustments are typically performed upon installation of the appliance and may not be repeated, regardless of

⁵ Gas Interchangeability Tests: Evaluating the Range of Interchangeability of Vaporized LNG and Natural Gas. Final Report, Gas Technology Institute, April 2003.

⁶ Guidelines for Adjustment of Atmospheric Gas Burners for Residential and Commercial Space Heating and Water Heating, U. S. Environmental Protection Agency, February 1979, EPA-600/8-79-005.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 124 of 250

instructions and consumer information. As a result, response of appliances to changes in gas supply must be considered in light of their likely initial installation and adjustment.

C.2.5.4 Maintenance

Annual maintenance is recommended by a number of gas utilities and public agencies and by manufacturers; however, periodic maintenance is not required in the U. S. for private establishments and occupancies. Annual maintenance consists of inspection and cleaning of the burner, safety systems, and venting system, but may or may not result in readjustment of the appliance for changing gas characteristics.

C.2.6 Gas Interchangeability Testing Programs for Appliances

Over the last several decades, a large body of testing has been performed to evaluate the impacts of changing gas composition on appliance operation. Many of these studies are shown in Table H.1. Unfortunately, there are limitations on relying on this work to evaluate interchangeability today. These limitations include:

- Many test reports are proprietary and not available for public review and dissemination.
- Few studies are recent enough to have evaluated appliances utilizing modern burner and heat exchanger designs, particularly regarding NOx emissions.
- Adjustment gases (i.e., new supplies) were evaluated in some studies after checking the settings of appliances for input rate and other adjustments instead of evaluating appliance performance without adjusting the appliance.
- In most studies, appliances were not evaluated over their entire operating range and in common maladjustment situations, where concerns about changes in gas composition are the most serious.
- For testing intended to evaluate gas interchangeability on the population of installed appliances, the number of appliances was small relative to the total population of appliances.
- Testing did not evaluate the effects of the gases on the durability and performance of the appliances over their lifetime.

C.2.7 Gas Interchangeability Concerns

There are three questions to be considered:

- How will the 160 million appliances already installed in the U. S. react to changes in gas composition?
- How will the 14 million new appliances sold each year react?
- Is Wobbe a sufficient indicator of gas interchangeability?

The answers to these questions may depend on the degree of departure of local natural gas from Test Gas "A", from the traditional range in characteristics of U. S. gas, from the characteristics of the gas when the appliance was first installed and commissioned, and the rate at which changes in gas composition occur.

The degree to which residential and commercial products are susceptible to changes in gas composition has not been fully quantified, and indeed there are various environmental factors not related to gas interchangeability that influence combustion in appliances. For example, cold ambient air temperature affects combustion airflow while cold gas temperature affects gas input, meaning that input and excess air levels can drift away from design conditions when temperature is varied. Cold metal temperatures make ignition and carry-over between burners more difficult and make flame extinction more likely. Outdoor appliance units must be designed to withstand high winds without flame failure and without generating excessive CO emissions. High moisture and ambient humidity also have direct impacts on combustion characteristics.

The concerns related to gas interchangeability are related to the effects that a shift or excursion in gas characteristics will have when combined with the variability in operating conditions that were foreseen when the appliance was designed, tested, and installed. Although appliances are designed to perform any traditional U. S. gas well when the appliance is properly adjusted, an appliance that is set to operate at the low end of U. S. gas (1,210 Wobbe) that is suddenly required to burn gas at the high end (1,403 Wobbe) will experience problems. For that reason, local or regional ranges that are more restrictive than national ranges are desirable to ensure the safe and reliable operation of installed appliances.

C.2.7.1 Performance (heat output, efficiency)

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 126 of 250

Variation in heat output and efficiency due to changes in Wobbe are generally not of concern in the appliance market. Heating appliances such as furnaces, boilers, water heaters, and clothes dryers, and manually or thermostatically adjusted cooking appliances will simply cycle more or less frequently to maintain the proper heat output as the gas composition changes.

Cooking equipment without thermostatic controls, such as rangetops and some types of commercial cooking are notable exceptions. Fluctuations beyond +/- 5% of the appliance adjustment point will cause the heat output on the "simmer" setting on residential cooktops to fluctuate noticeably. Variation in heat output during timed commercial broiling cycles can result in overcooked or undercooked food. Undercooking poses health concerns. Again, since broiling time and output can be adjusted, short-term fluctuations in Wobbe is the only concern.

Regarding efficiency, GRI (1982) concluded that for the majority of cases, variations in composition of natural gases did not have a noticeable affect on the efficiencies of residential forced-air furnaces, hot water boilers, water heaters, and ranges. When appliance efficiencies were measured repeatedly using gases with Wobbe numbers of 1,296, 1,179, 1,432, and 1,062 they generally gave results within 1 – 2 percentage points of each other. Similar variations in efficiency would be expected in today's appliances.

Noise is a special performance concern that is most acute in larger residential heating products. Within the Wobbe ranges being considered, excessive noise is not an important consideration. Flame lift and flashback, which are not accurately predicted by Wobbe, can cause objectionable noise, but the safety concerns associated with those phenomena are more important than noise concerns, and are discussed below.

C.2.7.2 Durability, Reliability, and Safety

Appliances are designed to operate safely through their useful life. Gas appliances owe much of their market success to the homeowners' recognition that the appliances are reliable and convenient, overcoming their usually higher first cost relative to their electric counterparts. Changes in gas composition that noticeably and adversely affect the reliability of existing or new gas appliances could result in a marked decline in the demand for gas appliances. Heat exchangers and other components such as switches and burners are sensitive to gas interchangeability.

C.2.7.2.1 Heat Exchangers

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 127 of 250

Heat exchanger designs and materials are selected in conjunction with the burner to optimize performance. Heat exchanger failure is normally caused by fatigue (expansion and contraction due to changes in temperature), which can be exacerbated by corrosion. Heat exchangers are subject to corrosion problems if underfired (whether additional corrosive agents are present or not) and subject to fatigue if overfired. Stainless steel heat exchangers may withstand a wider variation in gas composition because of stainless steel's greater stress and corrosion resistance as compared to aluminized steel.

Any changes in gas composition that affect combustion temperature or corrosive properties will have a detrimental effect on the life of the heat exchanger. Premature heat exchanger failure, besides resulting in warranty claims, normally necessitates replacement of the appliance, and can present a safety concern.

Simulations conducted by one furnace manufacturer predict that overfiring a residential furnace heat exchanger so as to raise its peak surface temperature 30°F above its design temperature will cut in half its 20 year expected life. Thus transient and chronic increases in Wobbe value can lead to noticeable and costly reductions in heat exchanger life.

C.2.7.2.2 Other Components

To meet the performance and prescriptive requirements in the appliance safety standards, modern appliances typically rely on pressure and temperature sensors and switches that cause the appliance to shut down when hazardous operating conditions (e.g. high gas pressure, high heat exchanger temperature) are sensed. Temperature has a very significant influence on the lifetime of an appliance and its components (i.e. thermocouples, electrodes, switches). Faster burning gases put more heat on the surface of the burner resulting in surface overheating, which has both immediate and long-term effects on the appliance. High temperatures lead to heat deterioration, port opening, and corrosion (both stress and intergranular). Infrared burners, for example, are very sensitive to temperature increases and demonstrate thermal mechanical stress and ignition delay in addition to corrosion. Once the burners begin to corrode their performance will begin to decline, typically resulting in flashback.

Moreover, changes in flame characteristics and ignition and increased operating temperature due to changes in gas quality can increase the frequency of these nuisance outages caused by activation or overheating of safety switches and sensors. Frequent nuisances, besides being irritating and costly for the homeowner, can cause troubleshooters to bypass the safety systems, leading to more serious safety concerns. When BG&E introduced Algerian natural gas with a Wobbe number about 6 percent higher than traditional BG&E natural gas, BG&E

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 128 of 250

noticed an increase in service requests by 13 percent, odor calls increased by 31 percent and gas leak calls increased by 10 percent.

Generally temperature fluctuations are not a concern for venting systems; however, the increase in corrosion potential from by-products or remnants of chemicals such as sulfur in the odorant, chlorides, and other potential contaminants is a concern.

C.2.7.2.3 Consumer Safety

Perhaps the most serious concerns related to gas interchangeability and appliances are those that impact health and safety. Release of excessive amounts of carbon monoxide, fire, and explosion are some of these concerns. A higher Wobbe potentially raises the firing rate of the appliance beyond the overfire test conditions allowed by design and under the safety certification regime. The most restrictive of these overfire tests is a test for excessive carbon monoxide production at 6.25 percent above the nameplate firing rate, which is test required for residential boilers and water heaters.

Carbon monoxide is a toxic gas, and under high concentrations, it is potentially lethal. Excessive carbon monoxide production, which occurs as a result of incomplete combustion, is particularly concerning for unvented appliances such as some space heaters and fireplaces, nearly all ranges and ovens, and direct-fired air heaters. As discussed in Appendix D, Wobbe is a reasonably good predictor of carbon monoxide production. However, as can be seen in the diagrams in Appendix D, carbon monoxide production can increase dramatically with small changes in Wobbe when the appliance is initially not properly adjusted or when moving from a gas at one Wobbe extreme (e.g. 1,269) to another (e.g. 1,403).

Unlike many newer furnaces, some older furnaces still used in the U. S. today do not have the safety devices such as pressure switches and temperature limits that require that the furnace be installed with the temperature rise within the rise range and on or nearly on rate, in order to function properly. For a newer product, such an excursion would be a nuisance outage, but for an older product, this would be a safety hazard.

Since appliance safety testing in the U. S. relies on "point" gases rather than "limit" gases, safe appliance design is proven during testing only around that point. The safety of the appliance is further proven by its field experience and qualification testing, which historically has involved natural gas that generally lies within a range of 1,269 to 1,403 Wobbe, but which probably has fluctuated only within a range within 2 percent of a local baseline (or narrower) during its lifetime.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 129 of 250

Unvented appliances sold nationally and not adjusted during commissioning experience up to 5% variation in Wobbe relative to the Wobbe at which they were safety-certified. Unvented appliances that have been properly adjusted during installation, but which were installed at the extremes of the U. S. range will need to remain within 5% of the Wobbe value in order to avoid previously unexperienced increases in carbon monoxide generation.

Carbon monoxide from vented appliances (furnaces, boilers, water heaters) is less of a concern from a health and safety standpoint since the carbon monoxide is vented outdoors in a properly operating system. However, in the case of a venting system failure or blockage, combustion products can be inadvertently introduced into the occupied space. It is advisable to maintain carbon monoxide generation at levels below 400 ppm, air-free (i.e., in undiluted combustion products), which is the level required by appliance safety standards for vented heating appliances.

Fire can result from excessively high appliance or surface temperatures igniting surrounding objects or from flame rollout. Surface burners could also pose a fire hazard such as clothing ignition and ignition of items such as paper towels on the counter top due to overfiring, especially if the burner input originally performed near the limit of test tolerances with Test Gas "A."

In the case of appliances with an enclosed combustion chamber, fires due to high surface temperatures or flame rollout are not a concern for gases with Wobbe values within the a range of +/-12 percent of Test Gas "A."

Explosion results from a buildup, then delayed ignition, of uncombusted natural gas in a confined space such as a combustion chamber or oven. Poor ignition properties caused by low Wobbe numbers can be to blame. Maintaining Wobbe within the certified range of the appliance (+/-6 percent from Test Gas "A") poses no incremental explosion risk, as long as ignition parameters remains within a range that guarantees reliable ignition and stable flame in partially pre-mix burners.

C.2.7.2.4 Environmental

Some types of appliances in California and Texas are covered by stringent regulations on emissions of nitrous oxides (NO_x) that contribute to the formation of ground-level ozone. U. S. NO_x emissions are quite strict, and because of the design of U. S. regulations, there is constant pressure on burner designs to achieve lower and lower NO_x limits. For a given appliance design, changes in gas composition, apart from Wobbe, can have unpredictable effects on NO_x formation. Appliances that do not meet local or regional NO_x emissions standards can be prevented from being installed or can be removed from service. Verification of NO_x

**White Paper on Natural Gas Interchangeability
And Non-Combustion End Use**

**Exhibit No. FGT-6
Page 130 of 250**

emissions in the field is only practical, and only practiced, for high input commercial appliances.

Each NOx element is carefully designed for particular combinations of flame temperature and energy output, and even subtle changes in either of those two characteristics can rapidly deteriorate the element and emissions performance. There is no recognized indicator based on gas composition or characteristics that accurately predicts NOx formation in new appliances designs.

C.3 Power Generation

Mike Klassen, Combustion Science and Engineering

C.3.1 Introduction

The natural gas supply profile in North America is shifting due to the narrowing gap between supply and demand. As a result, domestic supply sources may not be processed to historical levels due to fluctuation in natural gas liquid (NGL) market conditions. Unprocessed gas supplies result in an increase in higher hydrocarbons coupled with an increase in hydrocarbon dew point (HDP). In addition, increased LNG imports, which also may contain higher hydrocarbons, will be necessary to meet future demand. The transition from historical fuel compositions to the evolving fuel profile including unprocessed gas as well as LNG imports has presented some technical challenges for all stakeholders including the power generation industry. Recognizing these challenges, the Natural Gas Council has formed two technical task groups to address both the hydrocarbon dew point and the natural gas interchangeability issues associated with both LNG imports and unprocessed domestic supplies.

According to the Energy Information Agency, electric power generation consumed nearly 23% of the natural gas used in the United States in 2003. Furthermore, industrial applications, which include power generation (other than by electric utilities), consumed nearly 32% of the U.S. natural gas in 2003. This highlights the importance and large role of power generation applications as an end user of natural gas. This appendix will mainly focus on the effects of natural gas fuel composition on combustion in gas turbines, though the same issues exist for non-gas turbine power generation devices. However, the high pressures and temperatures of gas turbine combustors generally exacerbate these issues and create additional problems.

A survey of gas turbine operators and equipment manufacturers indicates that more than 85% of the gas fired capacity built since 1995 (>200,000 MW) has some version of a lean-premixed combustion system. There have been increasing issues with modern gas turbine performance as a result of changing gas quality, even though the fuel specifications of the original equipment manufacturers (OEM) are generally fairly broad. The advent of lean-premixed combustion in the power generation industry has changed the stability range of these machines as compared with older, diffusion flame combustion systems. This movement has also changed the sensitivity of these machines to fuel composition. The physics and chemistry of lean-premixed combustion makes dry, low emission (DLE) gas turbines more sensitive to the composition of fuel than tradi-

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 132 of 250

tional diffusion flame systems. Similar technology has been adopted by other combustion technologies that face regulation for pollutant emissions. A change in composition effects fundamental thermo-physical and chemical properties of the fuel, as well as the chemical kinetics of the combustion process. The changes in these properties manifest themselves in various phenomena, including lean blowout, autoignition, and elevated CO and NO_x emissions. Also, even though the name suggests premixed combustion, since perfect premixing is usually hard to attain, the level of premixing can also have a significant effect on the NO_x emissions.

This appendix will focus on the role of natural gas composition on gas turbine operations including machine life and pollutant emissions production. It is intended to inform stakeholders of the relevant technical issues in the ongoing process of building consensus on standards for natural gas quality and interchangeability. This paper provides the technical guidance necessary to help assess the impact of natural gas composition on both combustion stability and emissions of modern combustion turbines.

C.3.2 Background

The gas turbine was initially developed for aircraft propulsion, where the compact size and high thrust of this technology are quite desirable. Similar designs to those used for propulsion, known as aero-derivatives, have been used for stationary electrical power generation. Gas turbine technology is also widely used for compression, replacing reciprocating engines, in the transportation of natural gas. However, most large industrial gas turbines have different designs than those used for propulsion. These stationary gas turbines take advantage of the less restrictive size and weight requirements of ground-based operation to provide more power generation capability, while enhancing the combustion process. This has allowed stationary power generation gas turbines to achieve much lower emissions of regulated pollutants, primarily carbon monoxide (CO) and nitrogen oxides (NO_x), than their aero counterparts at very high thermal efficiencies.

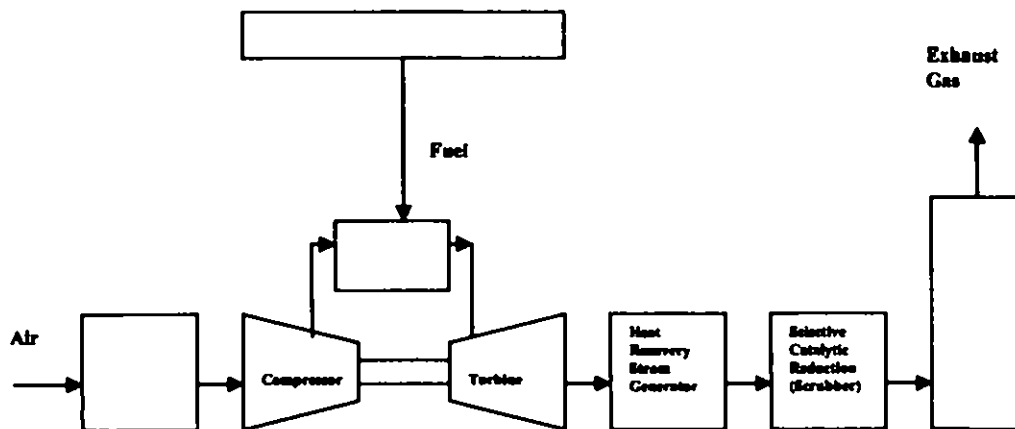


Figure C.3.1 Schematic of a combined cycle gas turbine plant.

Figure C.3.1 is a schematic of a generic combined cycle power generation gas turbine plant. Natural gas is obtained from the pipeline and, together with the hot, high pressure air from a compressor, is burned to produce the working fluid to spin the turbine and produce electricity. The high temperature exhaust from the turbine can be used to create steam for use in an industrial process or in a steam generator to produce additional electrical power (combined-cycle power plant). In some instances, the exhaust gases are passed through a scrubbing section to reduce the pollutant emissions. The exhaust gases are then released to the atmosphere via an exhaust stack.

Figure C.3.2 shows the main zones of a generic combustor. Fuel and air are fed through nozzles, and in most cases, swirlers are used to provide flame holding and better mixing. A high temperature area, where the primary fuel oxidation reactions occur, exists in the primary zone, and the flame is usually stabilized in a recirculation zone created by either a bluff body or some other fluid dynamic method. Addition of air in the intermediate zone lowers the temperature, but temperatures are kept high enough to convert the carbon monoxide to carbon dioxide (CO₂). The goal of the dilution zone is to alter the combustion gases to a temperature suitable for the metal blades of the turbine, where the energy is extracted from the hot gases.

Gas turbine engine combustors vary in design and methods in which the fuel and air are combined. The region where the air and fuel are combined and its relationship to where combustion takes place can have dramatic effects on the level of pollutant production. Various combustion modes are found in gas turbine combustors designs, including diffusion, lean-premixed, catalytic, and rich-

quench-lean (RQL). In this paper we will discuss the two most common types of combustors, diffusion and lean-premixed.

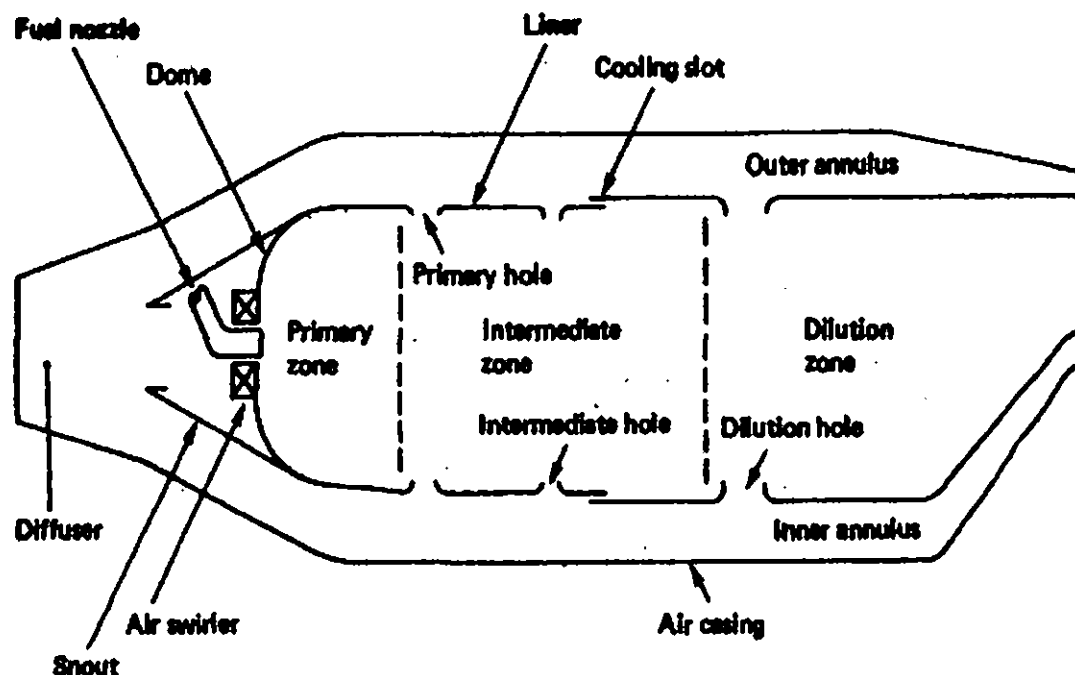


Figure C.3.2 Schematic of a conventional gas turbine combustor [Turns, 2000].

In conventional or diffusion combustors, fuel and air are fed separately into the flame zone. The heat release rate depends on the flow rates and the degree of mixing. The flame temperature is near the maximum limit for the mixture provided. The flame is stable, but because of high primary zone temperatures, NO_x emissions can be high, and radiation from the flame can cause the combustor liner life to decrease. Older turbines, especially those built prior to 1990, burn in diffusion mode. Diffusion mode combustion is also common in industrial boilers and certain appliances.

In lean-premixed combustors, the fuel and air are mixed upstream of the combustion zone, and the combustion takes place at a specific fuel-air mixture. Flame temperature is controlled by the mixture fed into the combustor. Most modern, low emission turbines operate in lean premixed mode and are known as dry, low emissions (DLE) turbines. By precisely controlling the primary zone temperature, an optimal balance between low CO and low NO_x production is struck. Figure C.3.3 shows the operation of a typical DLE gas turbine. Figure C.3.3 highlights the complex control and operational scheme needed to ignite, load and operate a modern, DLE gas turbine.

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 135 of 250

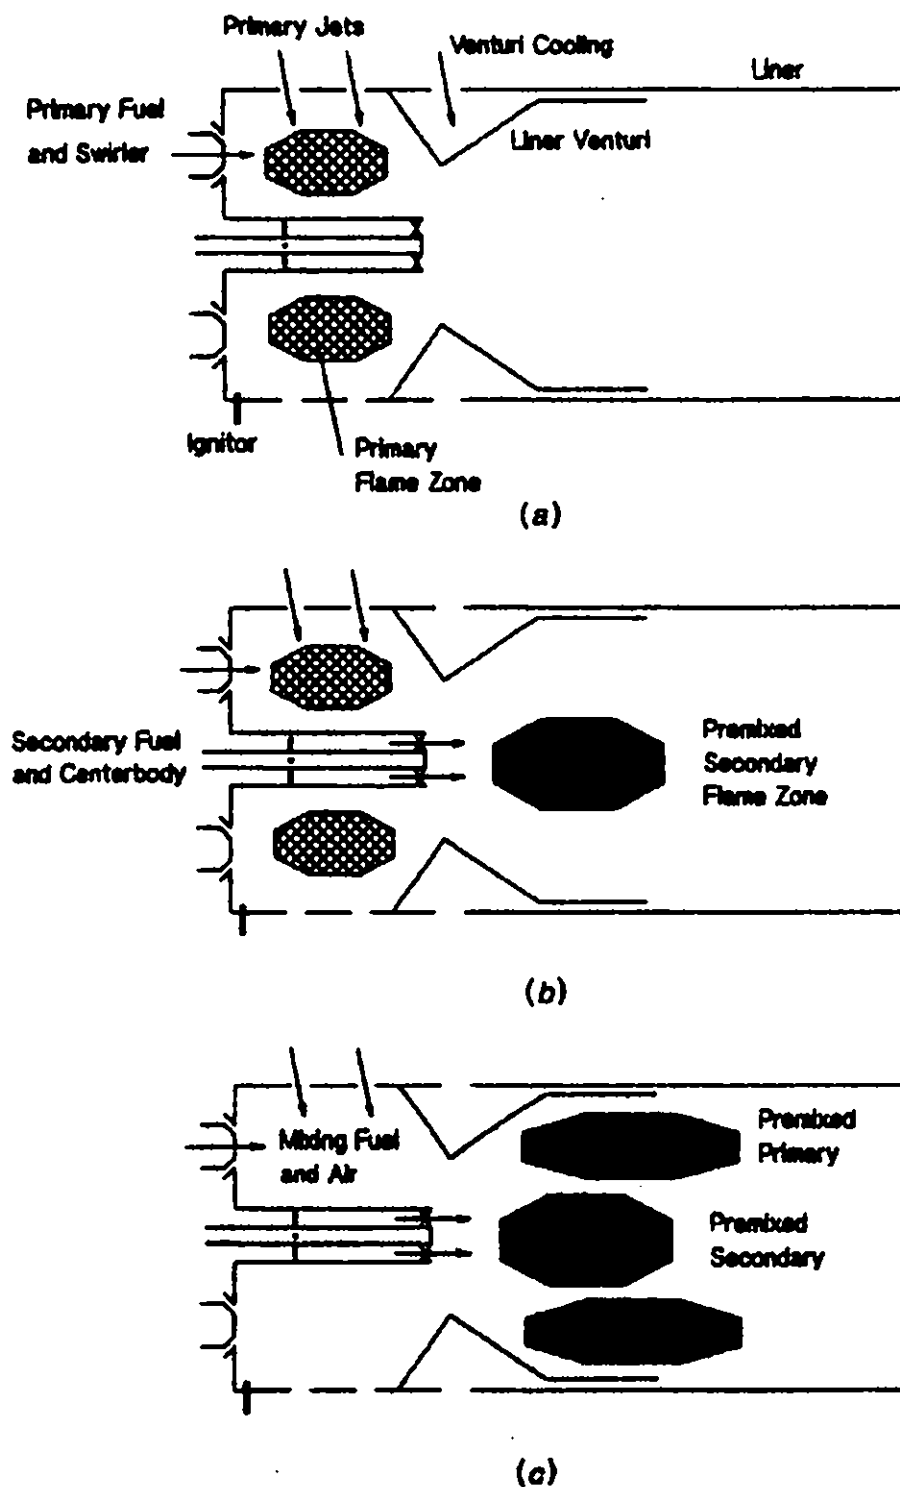


Figure C.3.3 Schematic of DLE combustor in different operational modes [Lefebvre, 1998].

The advantages of lean-premixed combustion mode include low NO_x emissions and increased combustor liner life due to the lowered primary zone temperatures in the combustor. Figure C.3.4 indicates the relationship between NO_x production and flame temperature. Lean-premixed combustion allows the primary zone temperature to be controlled, which limits NO_x production and generates low CO exhaust emissions. In diffusion combustors, spraying water into the flame zone to lower the primary zone temperature controls the production of NO_x. Unfortunately, this technique is limited since the addition of water essentially quenches the flame, increasing CO and unburned hydrocarbon emissions. As a result other technology must be utilized to radically reduce NO_x emissions in diffusion combustors, such as exhaust stream scrubbers.

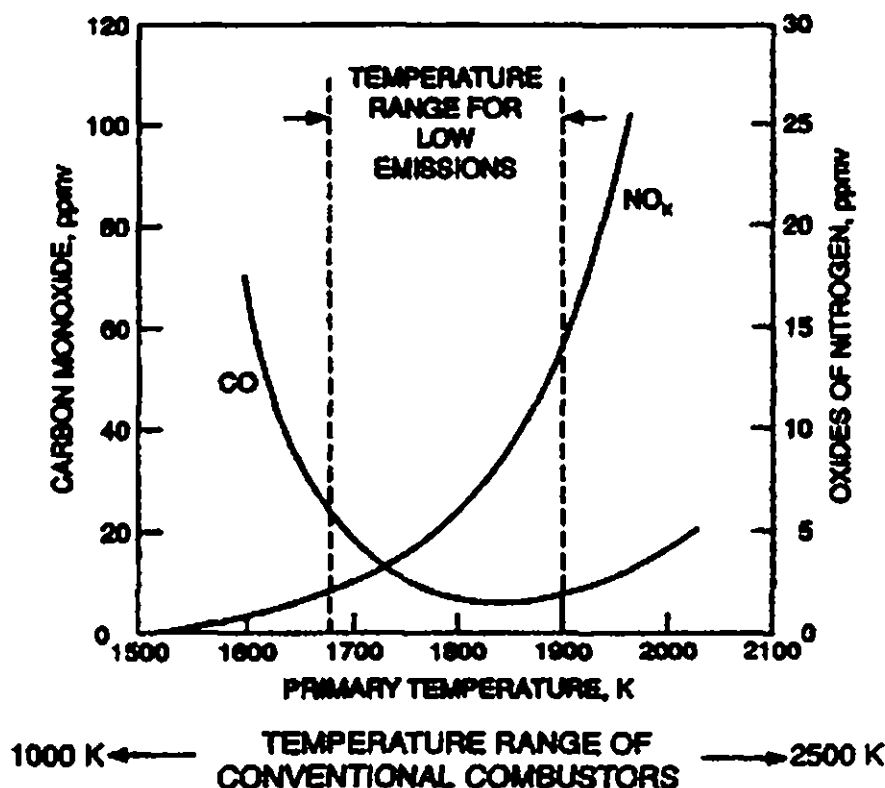


Figure C.3.4 CO and NO_x emissions versus combustion zone temperature (Lefebvre, 1998).

One important parameter used to describe the combustion process is the ratio of air to fuel processed in the combustor. In order to characterize the excess air

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 137 of 250

ratio, the air to fuel ratio is normalized by the air to fuel ratio at stoichiometric conditions. Thus, as shown in Eqn. 1, the fuel-air ratio is characterized by the actual air to fuel ratio divided by the ratio of air to fuel needed at the stoichiometric condition. Stoichiometric conditions exist when the amount of air used in combustion is the exact amount needed to completely burn all of the fuel to products of carbon dioxide and water with no excess oxygen.

$$\lambda = \frac{\frac{\dot{m}_{air}}{\dot{m}_{fuel}}}{\left(\frac{\dot{m}_{air}}{\dot{m}_{fuel}} \right)_{stoichiometric}} \quad \text{Eqn. 1}$$

In some cases, the fuel to air ratio is used (as opposed to the air to fuel ratio). When similarly normalized by the fuel to air ratio at stoichiometric conditions, this quantity is referred to as the **equivalence ratio** (Φ). When the equivalence ratio is less than unity, the conditions are fuel lean (excess air), and when the equivalence ratio is greater than unity, the conditions are fuel rich (excess fuel). In gas turbine engines, the overall equivalence ratio is on the lean side of a stoichiometric mixture.

In diffusion flame combustors, the combustion takes place over a range of equivalence ratios centered around the stoichiometric equivalence ratio. As shown in Figure C.3.5, this gives the combustion process a wide range of stable operation. However, since lean, premixed machines operate at low equivalence ratios, the operability range between the flashback and blowoff regimes is much narrower for these DLE systems. Hence, while lean, premixed operation allows for the reduction of operating temperature and, therefore, the reduction in NO_x production, the overall stability of the combustion process is reduced. As will be shown, changes in the fuel composition will change the fundamental combustion properties, affecting parameters important to flame stability.

Two operational issues have also become more significant with the increased use of lean-premixed combustion technology: combustion dynamics and gas turbine tuning. Dynamic pressure oscillations arise during any turbulent combustion process such as those in gas turbines. These pressure oscillations, otherwise known as combustion dynamics, are a significant concern in gas turbines, especially in modern DLE machines.

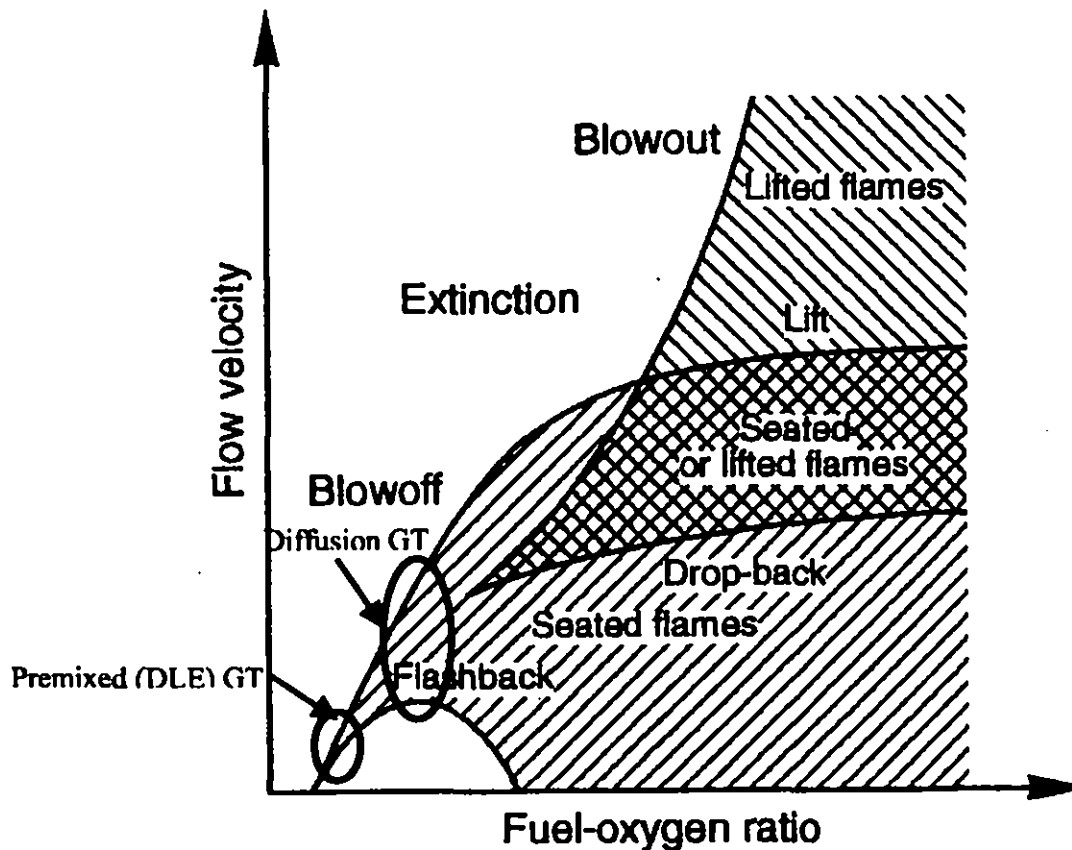


Figure C.3.5 Flame regimes as a function of fuel-oxygen ratio. Conventional or diffusion gas turbines have wider stability limits than premixed (DLE) gas turbines (Glassman 1996).

Combustion dynamics can be exhibited as audible noise from the gas turbine, often called humming or chugging. If excessive, the pressure oscillations can cause the gas turbine to shut down in order to avoid catastrophic damage. Long term exposure to pressure oscillations will reduce the lifetime of gas turbine hardware. The major components of the combustion system, including the fuel delivery system, the premixer, the combustion chamber and the initial portion of the turbine, act as an acoustic chamber which under the proper conditions can resonate violently [Correa, 1998]. Even at low levels, self-excited combustion oscillations can become large enough to cause excessive wear and component failure [Hubbard and Dowling, 2000]. These combustion instabilities can also lead to increased emission of NO_x and unburned hydrocarbons [Ni et al., 2000]. The amplitude and frequencies of combustion instabilities depend in a sensitive manner to changes in operating conditions including: inlet temperature, fuel type, and fuel injector and burner geometry. Changes in flame speed or stable flame location due to changes in fuel composition can induce combustion dynamics.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 139 of 250

Gas turbines have the ability to operate on a wide range of gaseous fuels. Stable operation of gas turbines has been demonstrated over a wide range of heating values. However, this operation requires a gas supply with a consistent composition. Virtually all lean, premixed, low emissions gas turbines are "tuned" to be optimized for the local gas supply. Tuning of the machine entails the adjustment of fuel and air flows across a variety of machine loading levels to optimize performance, while minimizing emissions and combustion dynamics. Once tuned, these turbines operate best on a limited range of gas properties. If the gas properties change significantly, the turbines can usually be adjusted to operate on the new gas composition, given sufficient advanced warning of the change. The amount of time necessary to perform the tuning, and the cost of the machine modifications can vary depending on the change in the operating conditions. For minor changes in operating conditions, including variation in the environmental conditions (e.g. changes in atmospheric temperature due to seasonal variations), tuning can be accomplished in less than a day. More substantial changes, such as significant changes, in gas composition can require several days of machine outage and expenses ranging up to \$100K. Very radical changes in fuel composition could require retrofitting the gas turbine with new hardware, which would require significant outage time and cost several million dollars per machine. Currently, lean, premixed, low emissions gas turbines cannot respond to significant, short-term changes in natural gas properties while retaining stable, low emissions operation. The degree of change that is significant is dependent upon which component of the gas is changing, with some deleterious effects occurring with relatively small changes while other changes in composition can be much larger with minimal impact.

C.3.3 Natural Gas Composition

Processed natural gas is comprised primarily of methane (CH_4), but it does contain higher hydrocarbons such as ethane (C_2H_6), and propane (C_3H_8) and larger hydrocarbons that are characterized by the number of carbons as C4, C5, C6+ etc. In some cases, it also contains hydrogen (H_2), carbon dioxide (CO_2), nitrogen (N_2), oxygen (O_2), sulfur compounds, and water. Unprocessed natural gas is typically richer in higher hydrocarbons such as C6+. With liquefied natural gas, impurities such as water, CO_2 and heavy hydrocarbons (C5+) are removed during processing. However, LNG imports may contain varying concentrations of C2 and C3 components that result in elevated heating values relative to traditional domestic supplies.

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 140 of 250

Table C.3.1 Concentrations of fuel constituents for natural gas in the United States. [Liss, 1992]

		Mean	Minimum *	Maximum *	10th Percentile	90th Percentile
Methane	Mole %	93.9	74.5	98.1	89.6	96.5
Ethane	Mole %	3.2	0.5	13.3	1.5	4.8
Propane	Mole %	0.7	0	2.6	0.2	1.2
C 4 +	Mole %	0.4	0	2.1	0.1	0.8
CO ₂ + N ₂	Mole %	2.6	0	10	1	4.3
Heating Value	MJ/m ³	38.46	36.14	41.97	37.48	39.03
Heating Value	BTU/scf	1033	970	1127	1006	1048
Specific Gravity		0.598	0.582	0.698	0.576	0.623
Wobbe Number	MJ/m ³	49.79	44.76	52.85	49.59	50.55
Wobbe Number	BTU/scf	1336	1201	1418	1331	1357
Air/Fuel Ratio	Mass	16.4	13.7	17.1	15.9	16.8
Air/Fuel Ratio	Volume	9.7	9.1	10.6	9.4	9.9
Molecular Weight	g/mol	17.3	16.4	20.2	16.7	18
Critical Compression Ratio		13.8	12.5	14.2	13.4	14
Methane Number		90	73.1	96.2	84.9	93.5
Lower Flammability Limit	Volume %	5	4.56	5.25	4.84	5.07
Hydrogen:Carbon Ratio		3.92	3.68	3.97	3.82	3.95
* without peakshaving						

Table C.3.1 shows the range of composition of natural gas supplies in the U.S. as determined by the Gas Research Institute in 1992. As can be seen in Table C.3.1, natural gas in the U.S. generally has very high methane content and this milestone study suggests that the gas supply has been relatively consistent in composition, especially in a given region and point of consumption. Consequently, most gas turbines have been 'tuned' for operation on a given fuel composition. Table C.3.2 shows the variability of natural gas composition worldwide and includes a 'typical' U.S. gas composition for comparison. Table C.3.2 shows that most LNG imports will have considerably higher concentrations of C₂, C₃ than typically found in the U.S. when gas processing is occurring at historically high levels. Source to source fuel composition variation can lead to changes in thermo-physical and chemical properties of natural gas. These changes in properties over a short period of time can lead to operational problems in gas turbine engines. A significant change in natural gas composition can lead to irregular heat release rate, change in operational temperature, autoignition of the natural gas, lean blowout in dry low NO_x (DLE) combustors, flame speed irregularities, and exceedence of emissions limits. Such a change is significant when it takes place on a time scale that does not allow the operator to make an on-line adjustment to the changing composition.

Exhibit No. FGT-6
Page 141 of 250

Table C.3.2 Fuel composition from various fuel sources around the world.

		Methane	Ethane	Propane	C4+	LHV	HHV	Wobbe
		mol %	mol %	mol %	mol %	BTU/scf	BTU/scf	Index
Typical US		95.7	3.2	0.7	0.4	949	1052	1379
Known GT Experience		89.6	8	1.5	0.9	1006	1112	1412
LNG Source	Brunei	89.76	4.75	3.2	2.29	1036	1144	1429
	Trinidad	96.14	3.4	0.39	0.07	940	1041	1374
	Algeria	87.83	8.61	1.18	0.32	991	1099	1405
	Indonesia	90.18	6.41	2.38	1.03	1010		1279
	Nigeria	90.53	5.05	2.95	1.47	1017		1283
	Qatar	89.27	7.07	2.5	1.16	1018	1126	1419
	Abu Dhabi	85.96	12.57	1.33	0.14	1020	1127	1420
	Malaysia	87.64	6.88	3.98	1.5	1045	1155	1434
	Australia	86.41	9.04	3.6	0.95	1036	1145	1429
	Oman	86.61	8.31	3.32	1.76	1051	1161	1438

Source: Siemens-Westinghouse Power Corporation

C.3.4 Interchangeability

The American Gas Association has created the following criteria for interchangeability of various gas compositions.

"American Gas Association (AGA) classifies two gases as 'interchangeable' if flame characteristics are the same after the substitution of one gas for another. Two gases are considered interchangeable if the flame does not lift, yellow tip, or flashback. The AGA precision burner is used to create lifting, yellow tipping, and flashback curves for various natural gas compositions. (Gas Engineers Handbook, 1974)".

The natural gas industry has performed interchangeability studies in the past. However, these studies have mostly focused on industrial diffusion flame burners and partially premixed home appliances. The result of these studies is a comprehensive mapping of parameter space (composition, air-fuel ratio, heat release) as it applies to industrial diffusion flame burners. These studies took place before the advent of lean-premixed gas turbines that are prevalent today. Hence, a more robust definition of interchangeability has recently been created to better account for the specific issues that end-users face.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 142 of 250

The Natural Gas Council + Gas Interchangeability Task Group reached consensus on the following updated definition of interchangeability:

The ability to substitute one gaseous fuel for another in a combustion application without materially decreasing operational reliability, efficiency or performance while maintaining air pollutant emissions within regulatory limits. Interchangeability is described in terms of technically based quantitative measures, such as indices, that have demonstrated broad application to end users and that can be applied without discrimination of either end users or individual suppliers.

This new definition accounts for the additional environmental and operational issues faced by many natural gas suppliers and end users. Generally, interchangeability has been determined through indices calculations. The most commonly used indices are discussed below.

C.3.4.1 Wobbe Index

The Wobbe Index was developed to characterize the similarity of gas mixtures based on the heat released for a given appliance or orifice-controlled device. The Wobbe Index (W_i) is derived from basic fluid dynamic principles (Odgers, 1986). The equation for thermal output from a given burner accounts for the size of a gas discharge orifice, D , the pressure loss across the gas discharge orifice, ΔP , the heating value of the gas, q_v , and the density of the gas, ρ , as shown below.

$$\text{Thermal Output} = kD^2 \sqrt{\Delta P} \left\{ \frac{q_v}{\sqrt{\rho}} \right\}$$

If the discharge orifice and the pressure drop are fixed for a given device, then the Wobbe Index, which is defined as

$$W_i = \frac{q_v}{\sqrt{\rho}},$$

guarantees constant heat rate for a gas burner.

A modified version of the Wobbe Index has been introduced to correct for the effect of the fuel temperature. In this case the Wobbe expression is modified to:

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 143 of 250

$$W_i = \frac{q_v}{\sqrt{\rho}} \sqrt{\frac{T_{ref}}{T}}$$

where T_{ref} and T are the reference and delivery temperatures, respectively. In another version of the modified Wobbe Index, the T_{ref} term is not included.

Wobbe index is proportional to the heat release from a fuel at constant pressure. Historically, the gas turbine industry has used Wobbe index to determine the interchangeability of gases. However this index, as a stand-alone test, is more appropriate for diffusion flame combustors. Application of the index for computing interchangeability in lean-premixed combustors will not be sufficient without further constraints. Since diffusion flame combustors operate in a more stable combustion regime, constant heat rate is a suitable constraint on gas interchangeability. DLE machines operate in a less stable combustion regime, so heat rate alone will not be a sufficient constraint to guarantee consistent operation.

C.3.4.2 Weaver Indexes

Since the Wobbe Index is only concerned with matching heat release for a given burner, other indices have been developed that monitor for interchangeability of other flame properties. The Weaver indexes compare the heat release, flame lift, flashback and yellow tipping of the proposed substitute gas relative to a reference gas (Gas Engineers Handbook, 1974).

Heat Release (J_H)

$$J_H = \frac{H_i}{H_s} \left(\frac{G_s}{G_i} \right)^{0.5}$$

Change in Primary Air (J_A)

$$J_A = \frac{B_i}{B_s} \left(\frac{G_s}{G_i} \right)^{0.5}$$

Lifting Index (J_L)

$$J_L = J_A \frac{v_i}{v_s} \left(\frac{100 - Q_i}{100 - Q_s} \right)$$

Flashback Index (J_F)

$$J_F = \frac{v_i}{v_s} - 1.4 J_A + 0.4$$

Yellow Tip Index (J_Y)

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 144 of 250

$$J_v = J_A + \frac{N_s - N_A}{110} - 1$$

Complete Combustion Index (J_I)

$$J_I = J_A - 0.366 \frac{R_s}{R_a} - 0.634$$

where:

H = heating value of gas, Btu per cu ft

G = specific gravity of gas (air = 1.0)

B = air theoretically required for complete combustion, cu ft per cu ft of gas

a and s = adjustment gas and substitute gas, respectively

v = flame speed (fps)

N = number of carbon atoms easily liberated by combustion per 100 molecules of gas, saturated hydrocarbons are assumed to have one carbon atom per molecule

R = ratio of number of hydrogen atoms in the hydrocarbons only

The Weaver indexes incorporate the effect of a change in gas composition by compensating for the change in air needed for combustion at stoichiometric conditions. These indices were developed to create a set of calculations that could be performed easily in order to test the interchangeability of a natural gas for use in industrial and home appliances. The experiments were carried out with burners that can be classified as industrial burners with diffusion flames or a limited amount of premixing.

These indices were developed before the advent of DLE combustors, and the combustion fundamentals that apply to industrial burners (diffusion) do not apply to DLE (lean-premixed) combustors. Therefore, the fundamental properties of fuel mixtures must be re-investigated to understand how the properties of the fuel change due to the variation in fuel mixture composition.

C.3.5 Effect of Fuel Composition on Fundamental Combustion Properties

As described above, the fuel composition directly affects many combustion properties. These properties include heat release rate, burning velocity, autoignition tendencies and flame temperature. These properties can directly affect gas turbine operation, as the combustors have been designed for specific tolerances. Large variations in these properties over a short duration of time can directly impact turbine performance, including emissions production, combustion dynamics and maintenance schedules. This section will review the effects of increases in

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 145 of 250

higher hydrocarbon concentrations in natural gas as it applies to basic combustion properties.

C.3.5.1 Air/Fuel Ratio

Table C.3.3 lists the fuel properties of methane, ethane, propane, as well as six natural gas compositions having the same Wobbe index. The natural gases were composed by changing the ratio of hydrocarbons (methane, ethane, propane), and adding dilution in the form of nitrogen to an arbitrarily chosen natural gas (NG1) composition. The ideal gas densities listed are calculated at standard temperature and pressure (0° C, 1 atm). The air to fuel ratio at stoichiometric conditions, taking into consideration the effect of dilution nitrogen, is calculated and tabulated.

In order to show how a change in fuel composition can effect operation in gas turbine engines, more specifically DLE combustors, a comparison of equivalence ratios (ϕ) is shown for the natural gases in Table C.3.3. Equivalence ratio is an indicator of flame temperature, and the flame temperature is an indicator of NO_x emissions. The equivalence ratio in the primary zone of the combustor can also indicate if the combustor is approaching lean-blowout. Table C.3.3 shows that if a theoretical combustor is operating on NG1 with air and fuel flow rates of 100 kg/s and 3 kg/s, respectively, the equivalence ratio inside the combustor can be calculated to be 0.505. If NG1 is replaced with same mass flow rate of NG6, even though the Wobbe index remains constant, the equivalence ratio drops by 16.6 percent, to a value of 0.421. A change in natural gas composition, such as the one described above, is likely to cause a range of operational issues, such as lean-blowout, poor dynamics, and an increase in CO emissions. DLE combustors are usually tuned over a narrow range of equivalence ratios, and, therefore, must be re-tuned if the fuel composition is significantly altered.

Table C.3.3 Fuel properties for pure gases and six natural gases of constant Wobbe index.

	Methane	Ethane	Propane	NG1	NG2	NG3	NG4	NG5	NG6
Methane (volume %)	100	0	0	90	85	82	79	77	75
Ethane (volume %)	0	100	0	5	15	0	20	10	0
Propane (volume %)	0	0	100	5	0	14.5	0	9.6	19
Nitrogen (volume %)	0	0	0	0	0	3.5	1	3.4	6
Lower Heating Value (Btu/lb)	21503	20417	19930	21222	21228	20701	21028	20706	20488
Ideal Gas Density (STP, lb/ft ³)	0.0447	0.0837	0.1228	0.0505	0.0506	0.0572	0.0528	0.0572	0.0814
Wobbe Index (Btu/ft ³)	1288	1675	1980	1352	1352	1352	1352	1352	1352
A/F ratio (mass basis)	17.11	15.98	15.57	16.83	16.82	15.79	16.44	15.78	15.22
ϕ (100 lb air / 3 lb fuel)	0.513	0.479	0.467	0.505	0.504	0.450	0.484	0.450	0.421
Percentage Change in ϕ (From NG1)	NOT CONSTANT WOBBE			0.00	0.13	10.85	4.18	10.95	16.56

C.3.5.2 Autoignition

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 146 of 250

Autoignition is the process through which a fuel-air mixture spontaneously ignites at a specified set of conditions (i.e. pressure, stoichiometry). Either a temperature or a delay time can quantify autoignition. Autoignition temperature is the minimum temperature at which a combustible mixture ignites with no external ignition source. The autoignition delay time has two components. The physical delay time is dependent on the mixing process used to mix the fuel and air to make a combustible mixture. The chemical delay time is dependent on the chemical kinetics of the specific fuel present in the mixture.

Autoignition is utilized in diesel engines to ignite the fuel and power the engine. However, autoignition is not desirable in most engines, including gas turbine combustors. In spark-ignition engines, premature ignition of the fuel due to autoignition is termed knock and can damage cylinders and pistons. In gas turbines, premature ignition of the fuel can cause the flame zone to shift to areas not designed to handle the heat and flame impingement. This generally leads to premature failure of the hardware and potentially to extensive damage to the machine.

Figure C.3.6 shows the autoignition temperature as a function of fuel molecular weight for a range of saturated hydrocarbons. Methane has the highest autoignition temperature of most common hydrocarbons, and the autoignition temperature decreases exponentially with increasing molecular weight. If introduced as liquid droplets, the higher hydrocarbons will tend to autoignite even at very low concentrations. In the vapor phase, the introduction of C4 and higher hydrocarbons to the natural gas can lower the autoignition temperature of the mixture. Significant amounts of the higher hydrocarbons in the natural gas may lower the autoignition temperature to levels similar to the temperature of the compressed air entering the premixer and combustor (i.e. compressor discharge temperature). This substantially increases the possibility of spontaneous ignition prior to the flame zone.

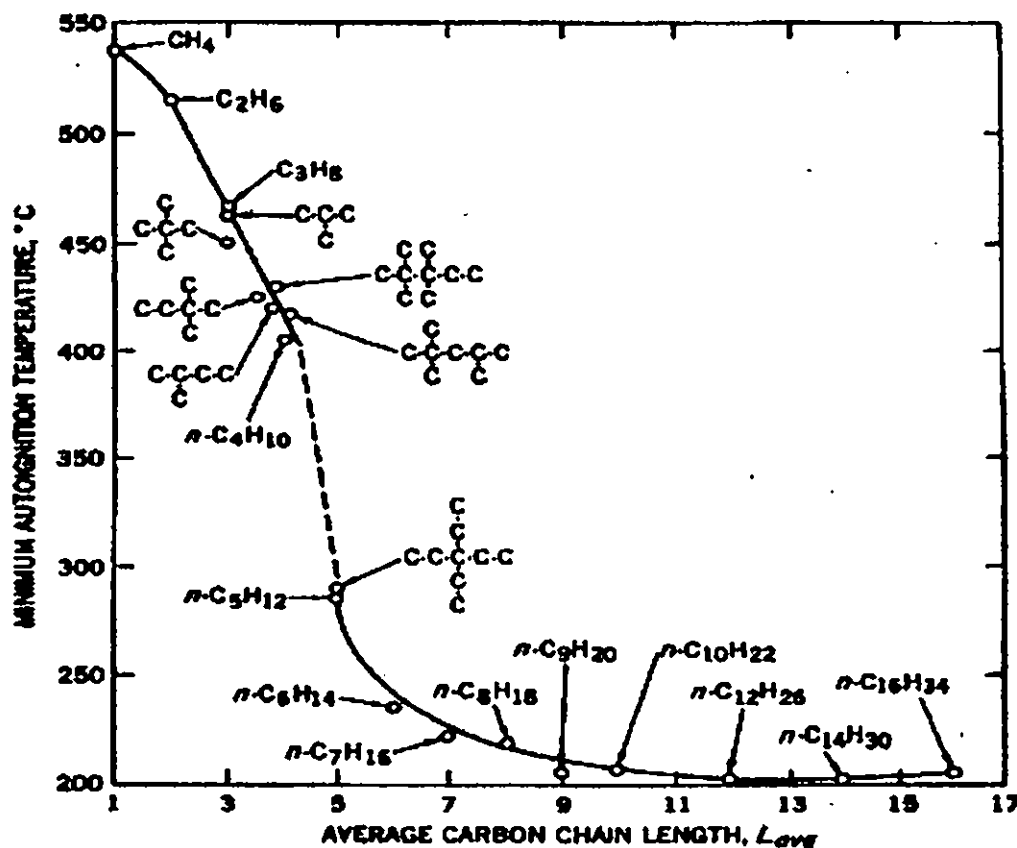



Figure C.3.6. Minimum Autoignition Temperature vs. Average Carbon Chain Length (Zabetakis, 1965).

Chen (2003) has conducted computational studies to show how fuel composition, temperature and equivalence ratio of the mixtures affect autoignition delay times. Methane, ethane and propane mixtures are used to simulate various natural gas compositions. Figure C.3.7 shows the results of the chemical kinetics modeling. The vertices of the triangles represent the maximum percentage (volume) of each hydrocarbon component in the natural gas mixture. Therefore, the maximum concentration of either ethane or propane present in any mixture is 20 percent. Since autoignition delay times vary by orders of magnitude from mixture to mixture, the data is presented on a logarithmic (base 10) plot. The logarithm is negative for autoignition delay times of less than unity.


White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 148 of 250


The kinetics modeling shows that an increase in temperature, pressure or equivalence ratio decreased autoignition delay time. This study showed that the presence of ethane and propane both reduce autoignition delay time as compared to pure methane and that this reduction increased with increasing C2 and C3 concentration. **This result is important for the gas turbine industry, since it can be demonstrated that a large change in composition will have a significant effect on the autoignition properties of the mixture, even if the overall energy content of the fuel is within a specified range.** In order to further investigate this issue, autoignition experiments and modeling must be performed for natural gases with varying fuel compositions having a constant energy content.

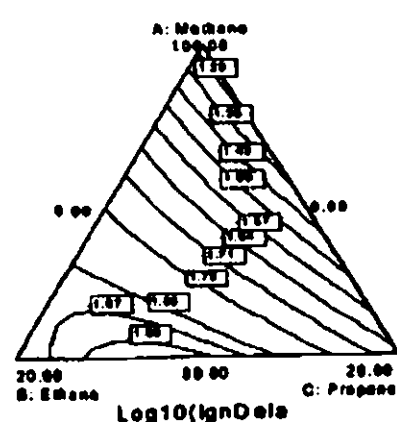


A) T=1075K, P= 6.5 atm, ER = 0.40

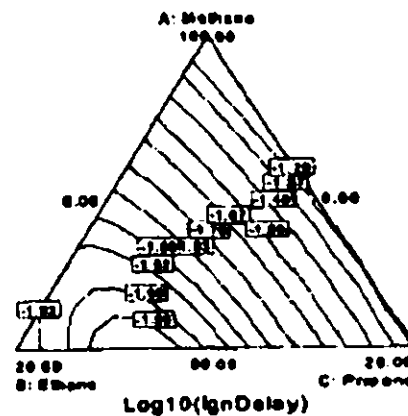

B) T=1075K, P= 6.5 atm, ER = 1.0

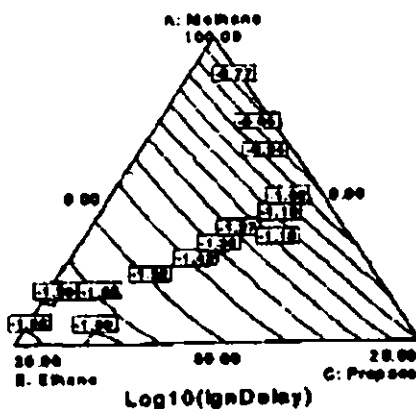

C) T=1075K, P= 1.0 atm, ER = 0.70

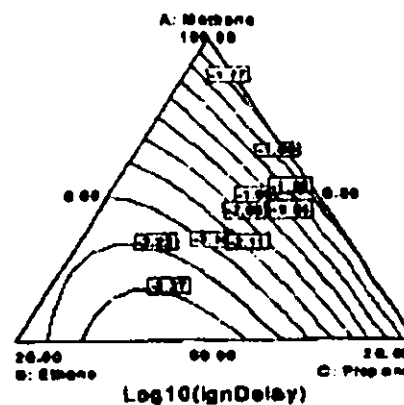

D) T=1075K, P= 12.0 atm, ER = 0.70

Figure C.3.7. Autoignition delay time vs. equivalence ratio, temperature, pressure and fuel composition.
 (Chen, 2003)

C.3.5.2 Burning Velocity, Lean Blowout, and Flashback

The velocity at which a flame propagates through a fuel/air mixture is dependent on the mixture composition, including the fuel components and the ratio of fuel to air. Burning velocity of the mixture is directly related to lean blowout and flashback within the combustor. Lean blowout can be defined as the point where flame extinction occurs because the rate of heat released during combustion is below the amount of heat needed to ignite a fresh fuel-air mixture entering the combustion zone (Lefebvre, 1998).

The effect of molecular structure of hydrocarbons on burning velocity (sometimes called flame speed) has been extensively studied (e.g. Gerstein, 1951). For the same number of carbons, up to four, it was shown that unsaturated hydrocarbons have a higher burning velocity than their counterpart saturated hydrocarbons. Bond type and placement are the reason for these trends.

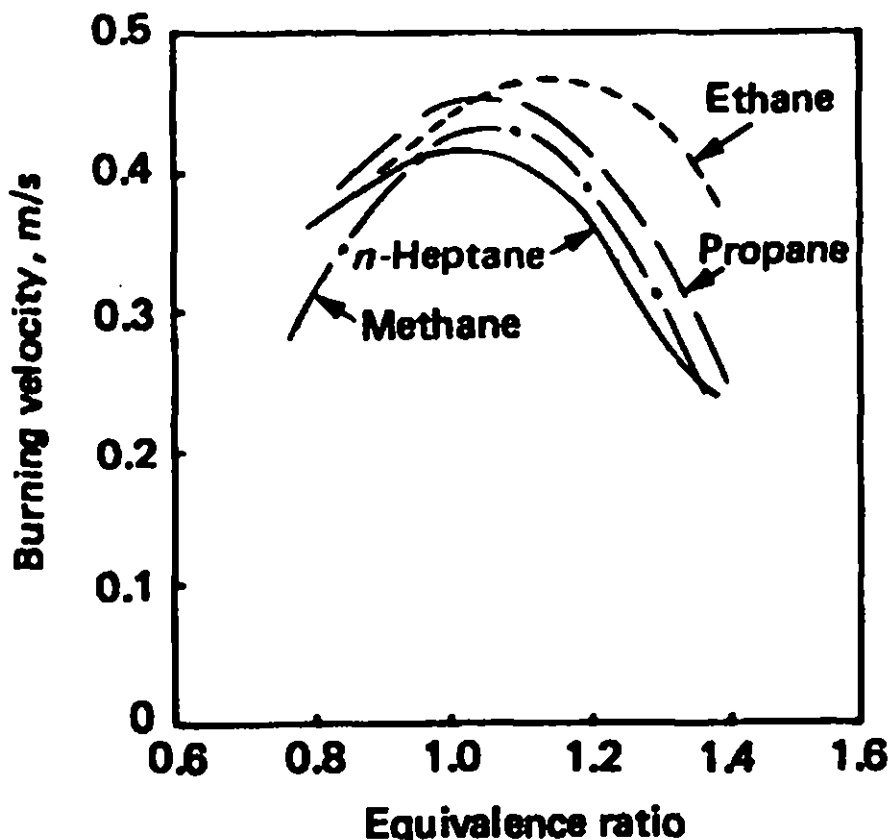


Figure C.3.8. Laminar burning velocity as a function of equivalence ratio and fuel type [Lefebvre, 1983].

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 150 of 250

Figure C.3.8 shows the laminar burning velocities of various fuels as a function of equivalence ratio. Laminar burning velocity of alkanes (methane, ethane, propane) reaches its maximum value on the slightly rich side of the stoichiometric point. Of great importance for DLE gas turbines is the widening difference in burning velocity between methane and other hydrocarbons as the mixture becomes fuel lean (equivalence ratio less than 1).

Burning velocity has been measured for natural gas compositions with constant Wobbe Index (Oostendorp and Levinsky, 1990). Figure C.3.9 shows the variation of laminar burning velocity as a function of equivalence ratio. The study shows that laminar burning velocity can vary by over 10% for fuels with constant Wobbe index. The natural gas sources compared in the study were from Netherlands. The laminar burning velocity of pure methane is shown for comparison.

The variation in burning velocity found for constant Wobbe Index fuels can be important in gas turbine engine operation. Gas turbines operate in a very turbulent flow regime. The turbulent velocity at any given moment of time can be shown to be:

$$v(t) = \bar{v} + v'(t)$$

where v is the instantaneous velocity, \bar{v} is the average velocity, v' is the fluctuating velocity and t is the time component. Various researchers have shown that the turbulent burning velocity is related to the laminar burning velocity and the fluctuating component of velocity (v') in a non-linear fashion [Lefebvre, 1998]. The turbulence can amplify small changes in laminar burning velocity, enhancing the effects shown in the studies discussed above. Hence, relatively small differences in laminar burning velocity may become important in highly turbulent flow, such as gas turbines used for power generation.

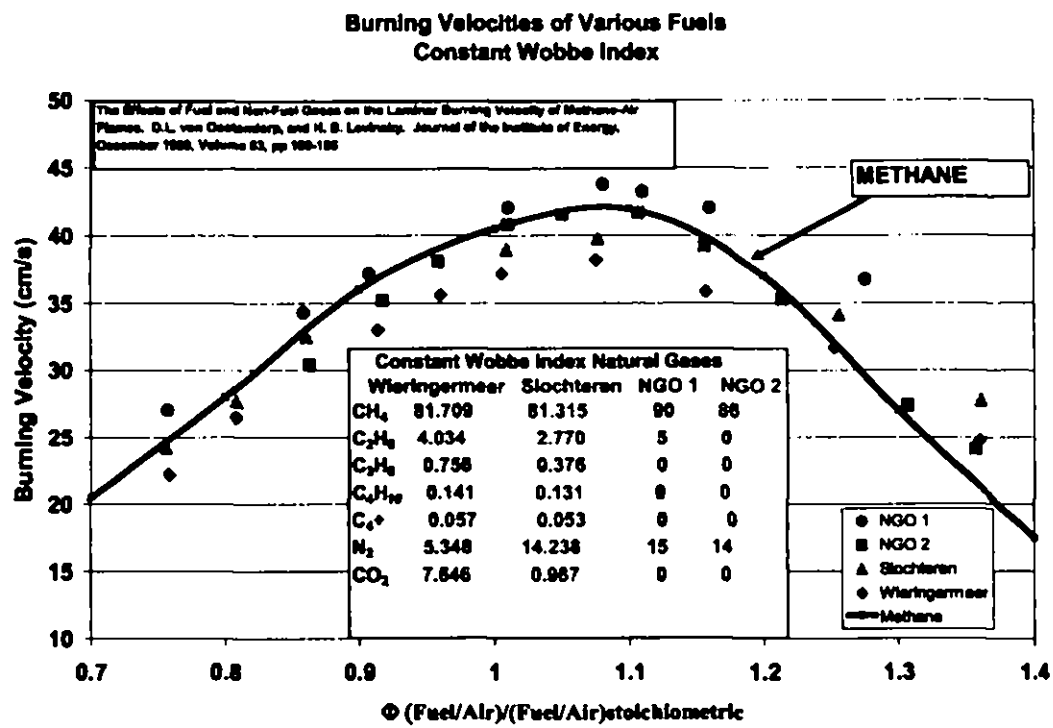


Figure C.3.9 Burning velocities of various fuels with a constant Wobbe index. [Oostendorp and Levinsky , 1990].

Changes in burning velocity due to fuel composition differences may increase the propensity for the gas turbine to flashback or blowout under conditions where the machine operated normally previously. These changes can also lead to increased emissions and combustion dynamics, to shortened hardware lifetimes, and to increased maintenance to the machine.

C.3.5.3 Combustion Dynamics

The introduction of DLE technology into the gas turbine industry compounded the problem of combustion dynamics. Combustion dynamics, generally present in the form of pressure fluctuations within the gas turbine combustor, can occur in any combustion device. However, the control or elimination of this problem is generally more straightforward in diffusion combustors. DLE machines are much more susceptible to this issue and in many instances combustor dynamics can limit the performance of a given gas turbine in order to maintain hardware life or meet emissions restrictions [Mongia et al., 2003].

The pressure oscillations associated with combustion dynamics can lead to externally audible tones that are damaging to workers on site. Furthermore, if the

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 152 of 250

pressure waves become resonant, significant hardware damage can occur [Mongia et al., 2003]. Combustion dynamics occur due to the coupling of pressure oscillations with the energy release rate. Since the need to reduce emissions has caused operation of the gas turbine near the lean flammability limit, the combustion process has become inherently less stable. Janus and co-workers [1997] found that a number of factors, including fuel composition, influence combustion stability for a given combustor. As shown in Figure 10, Nord and Andersen [2003] found that the change in fuel composition (shown as changes in the lower heating value (LHV)) affected the level of pressure pulsations (combustion dynamics) of the machine, increasing the pressure pulsations by a factor of 50%.

C.3.6 Effect of Natural Gas Composition on Pollutant Emissions

The introduction of gas turbines using lean, premixed technology has served to lower the emissions from gas turbines by 8 to 10 fold as compared to conventional, diffusion flame combustors (Cowell et al., 2002). Following this trend, the organizations that regulate pollutant emissions have tightened restrictions on gas turbines. Operators of gas turbines are typically required to meet strict limits on NO_x and CO emissions. Furthermore, restrictions on visible plumes from exhaust stacks are frequently invoked.

Fuel composition will play a role in the production of NO_x and CO in gas turbines. To assist in this explanation, a short review of the fundamentals of NO_x formation will be presented.

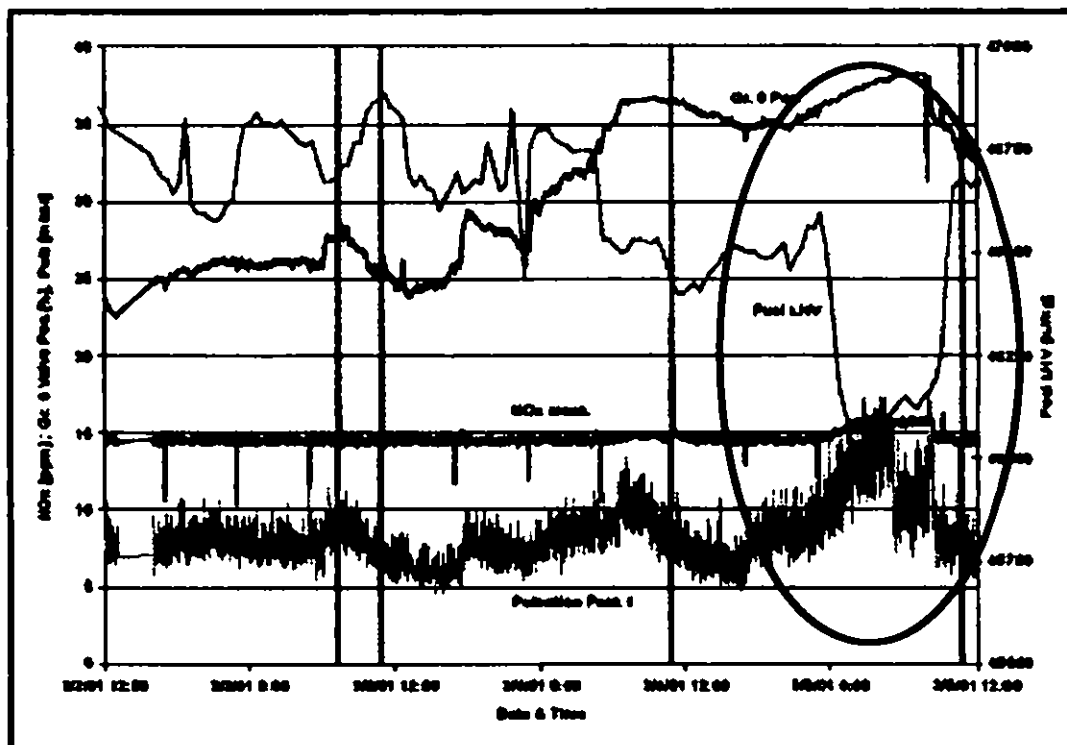


Figure C.3.10. Combustion pulsations and NO_x emissions as a function of fuel composition (Fuel Lower Heating Value (LHV)). Nord and Andersen (2003).

C.3.6.1 Fundamentals of NO_x Formation


The collective emissions of NO and NO₂ are referred to as oxides of nitrogen (NO_x). NO_x is generated during combustion of hydrocarbon fuels through a variety of mechanisms. There are five primary pathways of NO_x production in the gas turbine engine combustion process: Thermal NO_x, prompt NO_x, NO_x from the N₂O intermediate reactions, fuel NO_x, and NO_x formed through reburning (Turns, 2000). When burning lean mixtures of natural gas, the thermal NO_x and N₂O intermediate pathways are of primary importance.

C.3.6.1.1 Thermal (Zeldovich) NO_x Mechanism

Thermal (or Zeldovich) NO_x is created through the oxidation of nitrogen introduced with the combustion air. This mechanism of NO_x generation is highly temperature dependent, and the production rate is non-linear. Hence, small increases in temperature can lead to large increases in NO_x. This trend is shown in Figure C.3.10, where the exponential nature of NO_x as a function of temperature is evident. The thermal NO_x mechanism consists of three elementary reactions (Turns, 2000).

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use


Exhibit No. FGT-6
Page 154 of 250



Thermal NO_x reactions take place quickly (on the order of milliseconds) and are most influenced by temperature, atomic oxygen concentration and residence time. Thermal NO_x is exponentially dependent on temperature, so lowering of the peak combustion temperature can help reduce the amount of thermal NO_x from a gas turbine. A change in fuel composition can cause the flame temperature of the fuel to change, which in turn can affect the NO_x output.

C.3.6.1.2 N₂O Intermediate NO_x Mechanism

For lean, premixed combustion at gas turbine conditions (i.e. high temperature and high pressure), the nitrous oxide pathway is an important mechanism for NO_x formation. This pathway involves the attack of flame radicals on the N₂O molecule, creating nitrogen and nitric oxide. Important reactions include



Emissions of N₂O are not significant, but N₂O serves as an intermediate to NO emissions. NO_x emissions as a result of the N₂O mechanism are significant at the low equivalence ratios (less than 0.6) which are prevalent in current DLE combustors.

C.3.6.2 NO₂ Formation

Since NO_x is the combination of NO₂ and NO, formation of NO₂ must also be considered. NO₂ is very significant in this discussion, since concentrations of this species above 10 ppm in exhaust plumes of typical power producing gas turbines will create a visible plume (i.e. a 'brown' or 'yellow' plume). The U.S. EPA characterizes NO₂ as a reddish-brown, highly reactive gas. A visible plume can cause environmental compliance problems and is also undesirable from a public relations point of view. NO₂ plumes should not be an issue in gas turbines with NO_x exhaust treatment units or with total NO_x concentrations less than 10 ppm.

In gas turbine applications, little NO₂ is generally created in the combustion chamber, but conversion of NO to NO₂ can occur after the product gases have

left the combustion chamber. The conversion process predominately occurs at low temperatures (800– 1000 K, 980 – 1340 F), and is helped by reactions with unburned hydrocarbons and CO. Temperatures in the range of (800-1000 K) are present at some points after the exhaust gases have left the combustion chamber for a period of time necessary for the conversion of NO to NO₂.

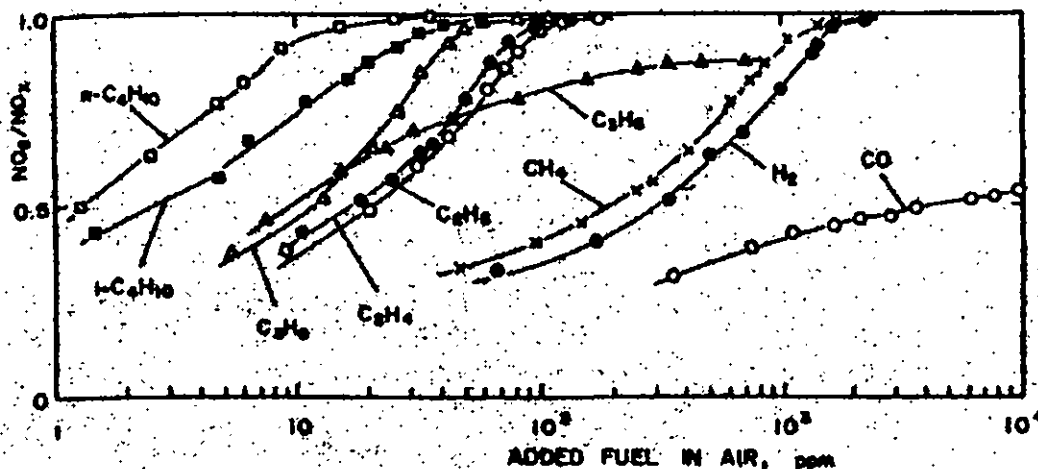


Figure C.3.11 Proportion of NO₂ to NO_x as a function of fuel added and fuel type. [Hori, 1992].

NO₂ formation, and especially the conversion of NO to NO₂, has been an area of active study for over a decade due to the desire to eliminate the visible plumes from power plants. As shown in Figure C.3.11, the composition of the exhaust stream is critical in conversion of NO to NO₂. **The presence of higher hydrocarbons found in unprocessed natural gas and some LNG imports increases the tendency for NO₂ conversion by up to several orders of magnitude as compared to methane. Hence, when unburned hydrocarbons (i.e. fuel) bypass the combustion zone (which happens in all gas turbines in minute amounts), the presence of higher hydrocarbons found in unprocessed domestic natural gas and LNG will increase the propensity for the conversion of NO to NO₂.**

C.3.6.3 Experimental and Computational Studies

Flores et al. (2002) investigated the role of natural gas composition on gas turbine emissions using an atmospheric-pressure gas turbine combustor. Emissions from a baseline natural gas, composed mainly of methane (97%), were compared with this same natural gas with added ethane and propane. Wobbe numbers of these fuels were not held constant and varied by up to 15%. The overall fuel/air mixture was held constant, but the combustor temperature would change slightly with the different fuels. This study found that both NO_x and CO formation were increased by increasing the level of higher hydrocarbons. However,

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 156 of 250

differences in operation between the laboratory gas turbine and field units may limit the usefulness of the conclusions from this work.

Combustion Science & Engineering, Inc. (CSE) has developed numerous models of gas turbine combustors to assist in the design and optimization of these devices. These models, using a technique known as Chemical Reactor Modeling (CRM), have been validated against operating gas turbines and make use of detailed chemical kinetic mechanisms to accurately predict the formation of pollutants. Figures C.3.12 and C.3.13 show the predicted NO_x and CO from a gas turbine as a function of combustor temperature. Six different natural gas formulations, having constant Wobbe Index, were considered in the model. Experimental data from an operating gas turbine (burning only one natural gas concentration) is also included for comparison. The initial model was tuned to a natural gas comprised entirely of methane. All model parameters were held constant as the fuel composition was varied. All the data on these plots has been normalized at the request of the manufacturer of the equipment. However, the normalization process has not altered the trends shown by these results. As is evident from these plots, the change in natural gas composition has little effect on the production of CO from the gas turbine. However, the gas composition had more tangible effects on the production of NO_x, with the addition of higher hydrocarbons causing the creation of additional NO_x for a given combustor temperature. Figure C.3.14 shows the change in adiabatic flame temperature for these gas mixtures that plays a role in the differences in NO_x production. These effects may be minimal in some cases; however, for machines operating near their regulated NO_x limit, the change in fuel composition could create emissions that exceed permitted allowances.

Unfortunately, there is very little publicly available operational data on the effect of natural gas composition on gas turbine performance. Compounding this problem is the relatively wide range of acceptable fuel compositions stated and/or implied by the OEM

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 157 of 250

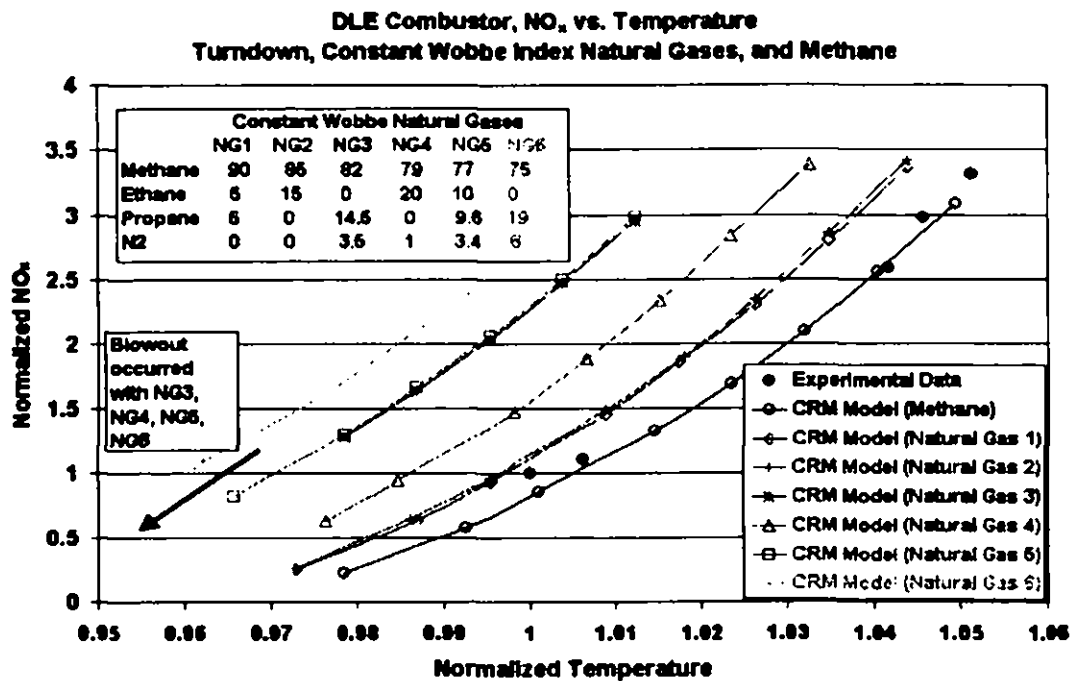


Figure C.3.12. Normalized predictions of NO_x in a gas turbine engine as a function of combustor exit temperature. Six different natural compositions of constant Wobbe Index were used.

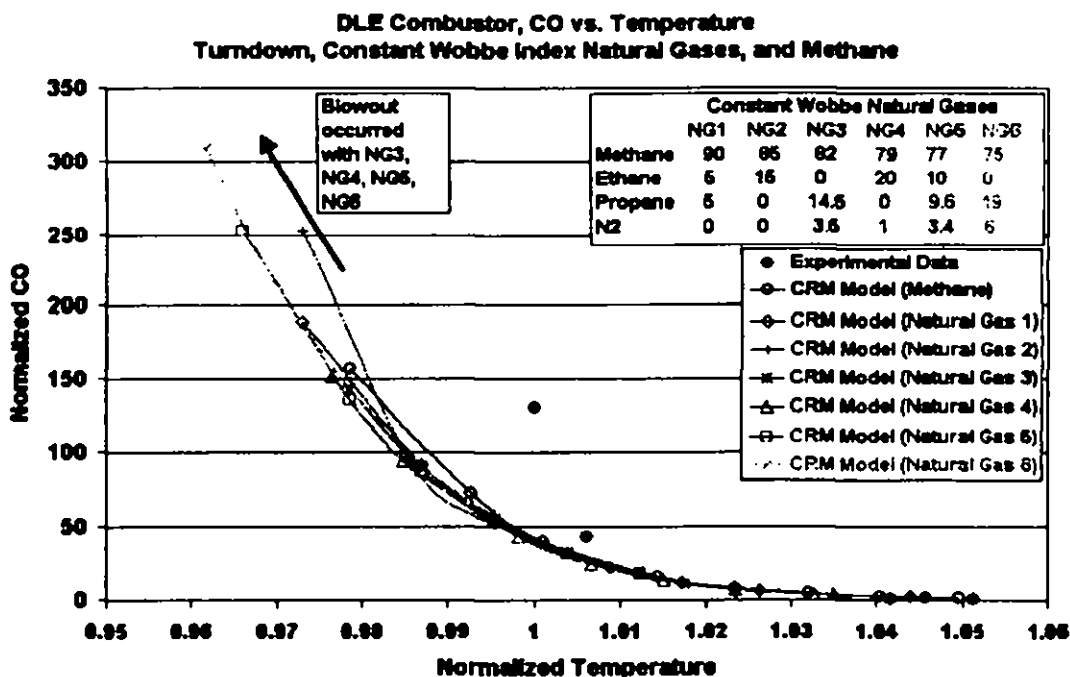


Figure 13. Normalized predictions of CO in a gas turbine engine as a function of combustor exit temperature. Six different natural compositions of constant Wobbe Index were used.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 158 of 250

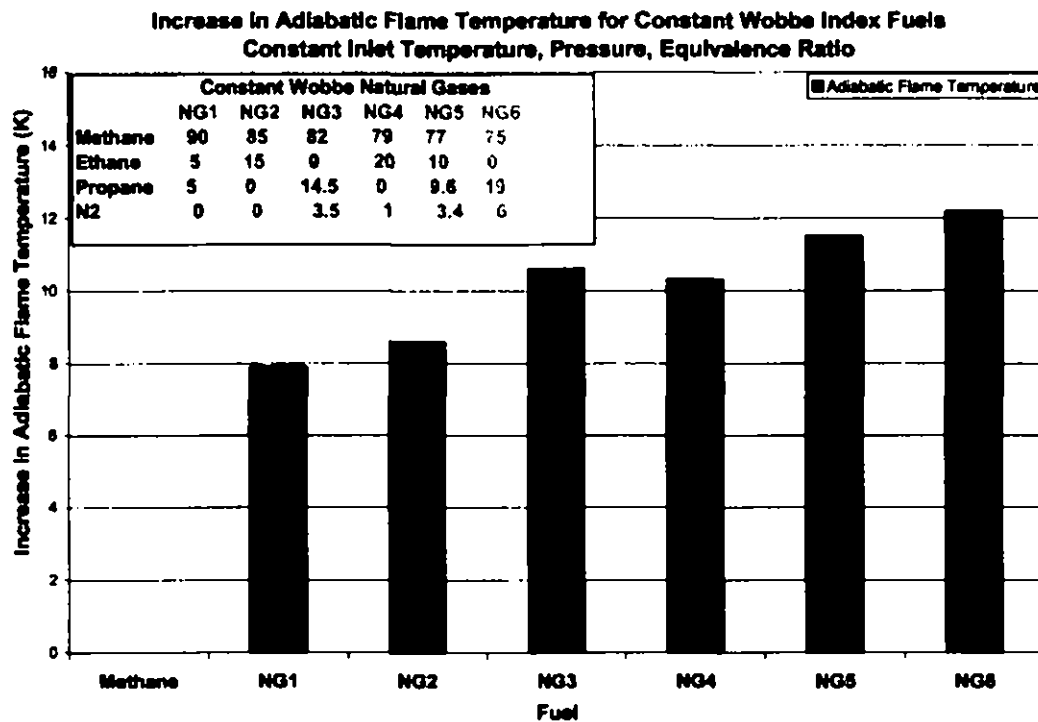


Figure C.3.14 Increase of Adiabatic Flame temperature for natural gas compositions of constant Wobbe Index but different chemical compositions.

fuel specifications. This data is difficult to obtain since it requires real-time detailed analysis of the natural gas coupled with real-time continuous measurement of gas turbine parameters including dynamics and emissions. Nord and Andersen (2003) did present some time-resolved data on the effect of natural gas composition on the emissions and combustion dynamics of an ALSTOM GT11N1-EV gas turbine. Measurements were made on the machine at base load operation. Changes in the fuel composition also changed the NO_x emissions, causing an increase above the 15 ppm level (see Figure C.3.10). As 15 ppm was the permitted limit of NO_x emission, the excursion in LHV caused the machine to become non-compliant for NO_x emissions.

Unfortunately, there exists little other operational data on the effect of natural gas composition on NO_x emissions that has been published in the peer-reviewed literature. There are some studies under consideration at this time, but the results are not yet available.

C.3.6.4 Visible Plume due to NO₂ Discharge

Gas turbines without post combustion emission controls and burning fuels with elevated higher hydrocarbon concentration have experienced NO₂ visible plumes.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 159 of 250

Many times this occurs at part load operation, when the combustion efficiency may be lower than that at base load operation. The lowered efficiency allows more unburned hydrocarbons to pass through to the exhaust, enhancing the conversion of NO to NO₂. However, there are instances where even at baseload operation, visible plumes due to NO₂ have been observed. Table 4 shows the fuel compositions at two plants with nearly identical gas turbine hardware. Please note that both gas turbine plants were producing approximately 25 ppm NO_x (i.e. NO and NO₂). One plant in Asia was operating using LNG with fairly high ethane (C2) concentrations and significant propane (C3). The second plant located in North America operated with natural gas containing little higher hydrocarbons. The Asian power plant had a consistent brown plume that was not observed for the North American plant. Neither plant had an exhaust treatment unit.

Table C.3.4 Natural Gas composition of two similar gas turbine sites.

Component	Plant 1 Composition (%) North America	Plant 2 Composition (%) Asia
Methane	95	89
Ethane (C2)	2	8
Propane (C3)	<1	2
C4 +	<1	<1
Nitrogen	2	<1

After careful analysis of all the potential differences that are likely to cause the brown plume, it was found that the differing fuel composition could explain the differences. An analysis of the propensity of each of the fuel gases to convert NO to NO₂ in the exhaust was undertaken using the data provided in Figure C.3.11. The results are given in Table C.3.5. Assuming, in each case, that the concentrations of the unburned hydrocarbons mimicked those of the original fuel, the Asian plant with its higher concentrations of C2 and C3 hydrocarbons was shown to be able to more effectively convert the NO produced in the combustor to NO₂. In this case the added NO₂ from the Asian plant was sufficient to create a visible plume (over 16 ppm as shown in Table C.3.5) while the North American plant remained below the visible plume level. Note that the total NO_x is not changed by the conversion of the NO to NO₂.

A further consequence of the conversion of NO to NO₂ due to presence of higher hydrocarbons is the effect on selective catalytic reduction (SCR) methods for NO_x removal in exhaust gases. SCRs utilize ammonia and reduction catalysts to remove NO_x from the exhaust stream of gas turbines. Studies have shown that this process is most efficient when the ratio of NO₂ to NO is approximately 1:1

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 160 of 250

[Madia, 2002]. The production of greater amounts of NO₂ in the exhaust stream can hurt the efficiency of the SCR's, increasing the need for additional ammonia injection and subsequently increasing the amount of ammonia escaping in the exhaust (so called "ammonia slip").

Table C.3.5. Conversion of NO to NO₂ for two plants with differing natural gas compositions.
Note that total NO_x for both plants is 25 ppm.

50 ppm UHC Total ([NO] ₀ = 25 ppm)						
	Asia	% Conversion	[NO ₂]	America	% Conversion	[NO ₂]
C1	45	32	8	49.5	35	8.75
C2	4	25	6.25	0.5	<1	~0
C3	1	10	2.5	0.02	<1	~0
I-C4	0.1	<1	~0	0.002	<1	~0
n-C4	0.1	<1	~0	0.002	<1	~0
		Final [NO₂]	16.75 ppm		Final [NO₂]	8.75 ppm

C.3.7 Discussion

As discussed above, several fundamental combustion properties are altered as the composition of the natural gas changes. Even for constant Wobbe Index fuels, the fundamental differences in burning velocity and autoignition properties of different hydrocarbons can potentially have significant effects on the operation of gas turbines, especially those using lean-premixed technology. Upon installation, individual gas turbines are 'tuned' by the OEMs or other specialists to achieve the best performance in terms of emissions and combustion dynamics. The tuning involves subtle changes in air and fuel flow splits between different nozzles and inlets. This tuning is necessary for a number of reasons, including changes in natural gas composition that alter the flame speed or the location of the flame zone within the combustor. Slight movement of the flame zone can have significant effects on emissions and combustion dynamics. As described by Cowell et al. [2002], the quality and composition of the fuel impacts turbine life and emissions levels.

The need to tune individual gas turbines indicates the requirement for a consistent natural gas composition. Gas turbines can operate on a wide range of fuels and natural gas compositions. This is evident from their use around the world and by a diverse number of industries that use fuels ranging from naphtha to hydrogen-enriched by-product gases [Mollere, 2002]. However, DLE machines, with a narrow stable operating range, cannot handle significant fluctuations in natural gas composition over a short period of time while maintaining their very low pollutant emissions. Even a significant one-time change in composition

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 161 of 250

will require re-tuning of the machine or an expensive hardware change. This conclusion is understandable from basic combustion science and is indicated in the results of Nord and Andersen [2003]. Unfortunately, additional published results from operating gas turbines are scarce.

The performance of DLE gas turbines is sensitive to numerous variables, including environmental conditions. For example, numerous studies have shown a direct correlation between environmental temperature and pressure and the level of NOx production (e.g. Janus et al. 1997). Hence, it is not surprising or beyond explanation that DLE gas turbine performance would be sensitive to the natural gas composition and particularly to fluctuations in composition.

Anecdotally, there have been numerous operational issues that have been attributed to natural gas composition changes. For example, an industrial plant operating DLE gas turbines in Germany had access to both Russian pipeline gas and North Sea natural gas. The machine had been tuned to run on the North Sea gas, which had fairly large C2 and C3 content with approximately 82% methane. The Russian gas was mostly methane (over 95%). In attempting to switch from the North Sea gas to the Russian gas, the combustion dynamics were so bad that the gas turbine automatically shut down to prevent severe damage to the rotating components. In this case, switching between the natural gas sources required retuning of the combustor.

As described by Gottlieb and Weiler [2004], the number of occurrences of operation problems due to natural gas variability is increasing. The owners and operators of the gas turbines also echo this conclusion at various gas turbine user group meetings. However, the number of well-documented cases that have been made available to the public are sparse.

The results presented above show that the Wobbe Index alone is not sufficient to guarantee interchangeability of natural gases for modern DLE gas turbines. The complex combustion systems of these machines are designed to produce very low emissions while maintaining acceptable hardware lifetimes. As shown above, there are several variables important to stable operation of these gas turbines, such as burning velocity and air to fuel ratio, that are not captured by Wobbe Index. Therefore, additional parameters must be used in order to assure that future natural gases of varying composition meet the fuel requirements of modern gas turbines. Such parameters might have broadly acceptable values nationally, but more restrictive values within a given region to assure that frequent retuning of gas turbines is not required.

It is important to note that stakeholders throughout the industry generally recognize that Wobbe alone is not sufficient to demonstrate interchangeability.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 162 of 250

Studies involving residential appliances typically conclude that additional combustion performance parameter(s) are recommended to adequately describe fuel gas interchangeability. Unfortunately, combustion testing involving gas turbines is typically not included in these studies.

C.3.8 Recommendations and Conclusions

- Modern combustion equipment used in power generation, including DLE gas turbines have very complicated combustion systems whose operation depends on the composition of the fuel supply both to maintain acceptable hardware life and to ensure low pollutant emissions. Significant changes in natural gas composition over a short period of time, beyond what equipment is "tuned" to receive, may have a substantial detrimental effect on the operation of DLE gas turbines through increased emissions, shorter hardware lifetime, and less reliable electric power generation.
- Although modern gas turbines and other power generation equipment can operate on a wide variety of different gaseous fuels, they are tuned to a narrow range of gas compositions during installation and must be "re-tuned" in order to maintain low emissions and stable, reliable operation if the gas composition is changed significantly.
- There is an inherent trade-off between NO_x and combustion dynamics for modern lean, premixed combustors; therefore, when changes in fuel composition begin to increase NO_x emissions, gas turbines and other combustion equipment will be forced to change operations to remain in compliance with emissions permits. These operational changes may result in reduced hardware life and plant reliability.
- Increases in heavier hydrocarbons:
 - Change the fundamental combustion properties of the fuel, especially the burning velocity and propensity for autoignition;
 - Have a significant impact upon the conversion of NO to NO₂, thus increasing the risk of visible plumes on non-SCR units, particularly at partial load conditions;
 - A relatively small change in heavier hydrocarbon concentration is enough to cause these changes.
- For power generation plants with selective catalytic reduction (SCR) systems for NO_x control, increased NO₂ can result in reduced catalyst efficiency and increased ammonia slip.
- Wobbe Index is not sufficient to characterize interchangeability of natural gas fuels for modern gas turbines. A metric that characterizes changes in flame speed and stoichiometric air fuel ratio will likely be needed to assure interchangeability of natural gas for modern gas turbines. More data and analysis is necessary to identify the right indices and their appropriate allowable ranges.

**White Paper on Natural Gas Interchangeability
And Non-Combustion End Use**

**Exhibit No. FGT-8
Page 163 of 250**

- Original Equipment Manufacturers (OEM's) need to better define fuel specifications in meeting performance guarantees to account for potential variations in higher hydrocarbons in fuel supplies.
- Additional research and/or operational experience are needed to better understand and quantify some of the theoretical implications of varying fuel composition on DLE combustion turbines and other modern combustion equipment. Research with published results would benefit the industry and policy makers in several related areas of gas composition effects on this equipment.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 164 of 250

C.3.9 References

Chen, Junhua. Autoignition of Natural Gas Fuels with Ethane and Propane Additives at Low to Intermediate Temperature. PhD. Thesis. University of California, Irvine. 2003

Correa, S. M., Power Generation and Aeropropulsion Gas Turbines: From Combustion Science to Combustion Technology, Twenty-Seventh Symposium (International) on Combustion/ The Combustion Institute, pp. 1793-1807, 1998.

Cowell, L., Etheridge, C., Smith, K. Ten Years of DLE Industrial Gas Turbine Operating Experiences. Proceedings of the ASME Turbo Expo. Amsterdam, The Netherlands. GT-2002-30280. 2002.

Flores, R.M., McDonell, V. G., and Samuelson, G. S. Impact of Ethane & Propane Variation in Natural on the Performance of a Model Gas Turbine Combustor. Proceedings of ASME Turbo Expo 2002. June 3-6, 2002. Amsterdam, The Netherlands. GT-2002-30080.

Glassman, Irvin. Combustion (3rd Edition). San Diego: Academic Press. 1996.

Gas Engineers Handbook (1st Edition). New York: Industrial Press. 1974

Gerstein, M., Levine, O., Wong, E. L. Fundamental flame velocities of hydrocarbons. Industrial and Engineering Chemistry. Vol. 43, No. 12, pp. 2770-2772. 1951.

Hubbard, S. and Dowling, A. P., "Acoustic Resonances of an Industrial Gas Turbine Combustion System", Proceedings of the ASME TurboExpo, 2000-GT-94, Munich, Germany, 2000.

Gottlieb, J. W., and Weiler, S. A., Legal & Regulatory Perspective: Gas quality a looming problem for power producers, Combined Cycle Journal, 2nd Quarter, 2004, pp 7-8.

Hori, M., Matsunaga, P. C., Malte, P. C., Marinov, N. M. The Effect of Low-Concentration Fuels on the Conversion of Nitric Oxide to Nitrogen Dioxide. Twenty Fourth Symposium (International) on Combustion. The Combustion Institute. 1992.

Janus, M. C., Richards, G. A., Yip, M. J., and Robey, E. H., "Effect of ambient conditions and fuel composition on combustion stability", ASME/IGTI Turbo Expo, Orlando, FL, 1997.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 185 of 250

Lefebvre, A. H. Gas Turbine Combustion. Philadelphia: Taylor & Francis. 1998.

Liss, W. E., Thrasher, W. H., Steinmetz, G. F., Chowdiah, P., Attari, A. Variability of Natural Gas Composition in Select Major Metropolitan Areas of the United States, GRI-92/0123, March 1992.

Madia, G. Measures to enhance the NO_x conversion in urea-SCR systems for automotive applications, Ph.D. thesis No. 14595, ETH Zurich, 2002.

Moliere, M., "Benefiting from the wide fuel capability of gas turbines: A review of application opportunities", ASME Turbo Expo, GT-2002-30017, Amsterdam, 2002.

Mongia, H. C., Held, T. J., Hsiao, G. C., and Pandalai, R. P., Challenges and Progress in Controlling Dynamics in Gas Turbine Combustors, Journal of Propulsion and Power, 19, pp. 822-829, 2003.

Ni, A., Polifke, W., and Joos, F., "Ignition Delay Time Modulation as a Contribution to Thermo-Acoustic Instability in Sequential Combustion", Proceedings of ASME TurboExpo, 2000-GT-0103, Munich, Germany, 2000.

Nord, L. O., Anderson, H. G. Influence of variations in the natural gas properties on the combustion process in terms of emissions and pulsations for a heavy-duty gas turbine. Proceedings of International Joint Power Generation Conference 2003, June 16-19, Atlanta, Georgia, USA. IJPGC2003-40188.

Odgers, J., Kretschmer, D. Gas Turbine Fuels and their Influence on Combustion. Kent: Abacus Press. 1986.

Oostendorp, D. L., Levinsky, H. B. The Effects of Fuel and Non-Fuel Gases on the Laminar Burning Velocity of Methane-Air Flames. Journal of Institute of Energy, December 1990, Volume 63, pp 160-166.

Rokke, Petter E., Hustad, Johan E., Rokke, Nils A., Svendsgaard, Ole B. Technology Update on Gas Turbine Dual Fuel, Dry Low Emission Combustion Systems. Proceedings of ASME Turbe Expo 2003, Atlanta, GA. GT2003-38112.

Turns, Stephen R (2000). An Introduction to Combustion: Concepts and Applications (2nd ed.). Boston: McGraw Hill.

Zabetakis, M. G., Flammability Characteristics of Combustible Gases and Vapors, U.S. Department of Interior, Bureau of Mines, Bulletin 627, 1965.

Zenty, S., "Photochemical Process for Fossil Fuel Combustion Products Recovery and Utilization," United States Patent 4,097,349 (1978).

C.3.10 Glossary

Adiabatic Flame Temperature

The theoretical maximum flame temperature that can be attained through the combustion of a fuel. This temperature does not account for heat losses to the surroundings, and assumes that the products of combustion are carbon dioxide and water. In practical systems, heat loss occurs to the surroundings, and disassociation of the products of combustion takes places, causing a flame temperature that is less than the theoretical maximum.

Autoignition

Autoignition is the process through which a fuel-air mixture spontaneously ignites at a specified set of conditions (i.e. pressure, stoichiometry).

Burning Velocity

The burning velocity is the velocity at which a flame propagates through a quiescent fuel/air mixture. In practical systems, the burning velocity is turbulent.

Diffusion (Combustion)

Fuel and air are mixed in the region where the combustion takes place. Combustion flame front is formed at the interface where fuel and air diffuse into each other. Older gas turbines (conventional) operate in diffusion mode combustion.

Equivalence Ratio

Equivalence ratio is the ratio of fuel to air divided by the ratio of fuel to air needed at stoichiometric conditions.

Flashback

Flashback occurs when the velocity of a premixed jet of fuel/air mixture is lower than the burning velocity of the fuel/air mixture. Since the flame front traveling backwards into the fuel/air mixture is faster than the jet of fuel/air mixture traveling towards the flame, flashback takes place.

Laminar

In a laminar (stream lined) flow, mixing and transport are accomplished by molecular diffusion.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 187 of 250

Lean Blow-out

Lean blowout can be defined as the point where flame extinction occurs because the rate of heat released during combustion is below the amount of heat needed to ignite a fresh fuel-air mixture entering the combustion zone

Lean Flammability Limit

The amount of fuel (usually percent by volume) in a homogeneous mixture of fuel and air, that can sustain combustion when ignited, is defined as its lean flammability limit.

Premixed (Combustion)

Premixed combustion takes place when fuel and air are mixed upstream of the combustion zone and fed into the combustor as a homogeneous mixture of fuel and air.

Stoichiometric

The amount of air required to completely combust all of the fuel to the products of combustion of carbon dioxide and water is known as the stoichiometric amount.

Turbulent (Combustion)

Macroscopic eddies and unsteady flow features enhance mixing, and in combustion, increase the flame front.

C4 Reciprocating Engines

Bruce Hedman, EEA

C4.1 Introduction

Reciprocating internal combustion engines are a widespread and widely used technology. North American production exceeds 35 million units per year for automobiles, trucks, construction and mining equipment, marine propulsion, pipeline compression, water pumps and a diverse set of power generation applications. There are two basic types of reciprocating engines – spark ignition (SI) and compression ignition (CI). Spark ignition engines for peaking or continuous duty stationary applications over 50 kw, such as power generation, use natural gas as the preferred fuel, although they can be set up to run on propane, gasoline, or special gases such as landfill, flare, and digester gas. Stationary compression ignition engines (often called diesel engines) are primarily used in emergency generation applications, and can operate on diesel fuel or heavy (residual) oil, or they can be set up to run in a dual-fuel configuration that burns primarily natural gas with a small amount of diesel pilot fuel for ignition. Because of its relatively low emissions signature and ease of operation, the natural gas-fueled engine is the engine of choice for the higher-duty-cycle (more than 500 hr/yr) stationary power market below 5 MW, many pipeline compression and oil and gas field gathering systems, and certain fleet vehicle applications.

Current generation natural gas engines offer low first cost, fast start-up, low emissions, proven reliability, good load-following characteristics, and significant potential for heat recovery. Electric efficiencies of natural gas engines range from 28% LHV for stoichiometric engines⁷ smaller than 100 kW to more than 40% LHV for larger lean burn engines⁸ (>2 MW). Waste heat can be recovered from the engine exhaust and from the engine cooling systems to produce either hot water or low-pressure steam for combined heat and power (CHP) applications. Overall, CHP system efficiencies (electricity and useful thermal energy) of 70% to 80% are routinely achieved with natural gas-engine systems in applications whose electrical and heat loads are appropriately in balance.

Natural gas engine technology has improved dramatically in the past decade, driven by environmental and economic pressures for power density improve-

⁷ Stoichiometric engines are designed to burn the chemically correct proportions of fuel and air needed for complete combustion, i.e., there is no excess fuel or oxygen after combustion. A rich-burn engine is a common term for a stoichiometric engine, where the air to fuel ratio is maintained at or near the correct level for complete combustion.

⁸ In lean-burn engines, the fuel-air mixture contains more air than is needed for complete combustion by design, allowing for cooler combustion temperatures and lower NO_x emissions formation.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 169 of 250

ments (more output per unit of engine displacement), increased fuel efficiency, and reduced emissions. Computer systems and software have greatly advanced reciprocating engine design and control, accelerating advanced engine designs and making possible more precise control and diagnostic monitoring of engine operation. Stationary engine manufacturers and worldwide engine R&D firms continue to drive advanced engine technology, including accelerating the diffusion of technology and concepts from the on highway heavy duty truck market to the stationary engine market.

The emissions signature of natural gas engines, in particular, has improved significantly in the past decade through better design and control of the combustion process and through the use of catalytic treatment of exhaust gases. Advanced lean-burn natural gas engines are available that produce NO_x levels as low as 50 ppmv @ 15% reference O₂ (dry basis) without the use of a post treatment catalyst system.

C.4.2 Market Trends

C.4.2.1 Power Generation Applications

Reciprocating engines are well suited to a variety of distributed generation applications and are widely used in the United States and Europe in power-only – as well as combined heat and power (CHP) – configurations in the industrial, commercial, and institutional market sectors. The widespread use of reciprocating engines in stationary applications in the United States is supported by a highly developed sales and service infrastructure. Reciprocating engines start quickly, follow load well, have good part-load efficiencies, maintain efficiency and output at increasing altitude and ambient conditions, and generally have high reliabilities. In many cases, multiple reciprocating engine generating sets are used to ensure overall plant capacity and maintain high levels of reliability and availability. Reciprocating engines have higher electrical efficiencies, and thus lower fuel-related operating costs than gas turbines of comparable size. In addition, the first costs of reciprocating engine generator sets are generally lower than gas turbine gensets up to 3-5 MW output range. Reciprocating engine maintenance costs per kW-hr are generally higher than equivalent-sized gas turbines, but the engine maintenance can often be performed by in-house staff or provided by local service organizations.

Potential distributed generation applications for natural gas reciprocating engines include standby, peak shaving, grid support, and CHP applications, in which engine waste heat is utilized to produce hot water, low-pressure steam, or chilled water through waste-heat-fired absorption chillers. Reciprocating engines also are used extensively as direct mechanical drives in applications such as water pumping, air and gas compression, and chilling/refrigeration.

C.4.2.1.1 Standby Power

Standby power systems are required by fire and safety codes for hospitals, elevator loads, and water pumping. The standby genset is typically the simplest distributed generation system, providing power only when the primary source is out of service or falters in its voltage or frequency. This application typically requires low capital cost, minimal installation costs, black-start capability (ability to start when the grid supply is interrupted), and grid-isolated operation. Due to the relatively low number of operating hours typically required in standby power applications, efficiency, emissions, and variable maintenance costs are not major factors in technology selection. Diesel engines are highly preferred for standby power due to their low capital cost, rapid start-up capability (within 10 seconds), and load-following (transient response) characteristics. Standby applications range from a few kW to very large capacities (up to 10 MW) in industrial or utility applications. However, most are high-speed units under 2 MW. Diesel engines can typically be installed in standby applications without being required to meet strict emissions standards, although operation is limited to a certain number of hours per year (generally 300 to 500 hours). While primarily a diesel engine market, natural gas-fueled engines are increasing market share in the small (<500 kW) standby market.

C.4.2.1.2 Peak Shaving

In certain areas, customers and utilities are using on-site power generation to reduce the cost of peak load power. Peak shaving is beneficial to customers who have poor load factors and/or high electricity provider demand charges. Typically, peak shaving does not involve heat recovery, but heat recovery may be cost effective if the peak period is more than about 2,000 hours/year. Since low equipment cost and high reliability are the primary requirements, reciprocating engines are ideal for many peak-shaving applications. Emissions may be an issue if the annual number of operating hours is high or the operating facility is located in a non-attainment area. Where peak shaving can be combined with another function, such as standby or emergency power, the economics are considerably enhanced. Peak shaving is a growing market for natural gas engines.

C.4.2.1.3 Combined Heat and Power

While the use of natural gas engines is expected to grow in both grid support and customer peak-shaving applications, the most prevalent on-site generation application for natural gas engines has traditionally been CHP, and this trend is likely to continue due to the cost effectiveness of heat recovery and growing

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 171 of 250

government recognition of the benefits of CHP. The economics of natural gas engines in on-site generation applications are enhanced by effective use of the thermal energy contained in the exhaust gas and cooling systems, which generally represents 60% to 70% of the input fuel energy.

There were an estimated 1,354 engine-based CHP systems operating in the United States in 2003, representing more than 1,425 MW of electric power capacity. Facility capacities range from 30 kW to more than 40 MW, with many larger facilities comprised of multiple units. Reciprocating engine CHP is installed in a variety of industrial and commercial applications with natural gas engines representing 78% of the total installed reciprocating engine CHP capacity.

C.4.3 Reciprocating Engine Technology

Natural gas engines fall into two basic categories, each having fundamentally different characteristics and implications from a gas composition perspective. Stoichiometric engines, typically derived from gasoline engines, are used in light duty cars and trucks, some medium duty vehicles, and small to medium-sized power generation applications. Lean burn engines, used in medium and heavy duty vehicles, larger power generation applications and pipeline compression, are generally derived from diesel engines and differ greatly in terms of their combustion process and sensitivity to variations in gas composition because of their higher compression ratios. In both types of engines, control of the air-fuel ratio is critical for optimum performance of the engine and emission control systems. As gas composition affects the gas density and stoichiometric air-fuel ratio, it can have an important influence on engine performance and emissions.

- Stoichiometric Natural Gas Engines. Under stoichiometric conditions, air and fuel are balanced in the exact proportions required for complete combustion. These engines are generally naturally aspirated (drawing fuel and air using vacuum), and all-or nearly all-of the fuel and air are consumed in combustion reactions. Such engines produce an exhaust that has very little oxygen content. Closed-loop engine control systems are employed to ensure that the correct air-fuel ratio is maintained. Most modern stoichiometric light-duty vehicles use three-way catalysts to control emissions. Closed-loop engine controls give these engines the ability to adapt to changes in many operating parameters, including gas consumption. Stoichiometric engines can be designed to accommodate a relatively wide range of gas compositions through the use of oxygen sensors in the exhaust stream and electronic fuel controls with adaptive learning capabilities. At modest compression ratios (e.g. under 12:1), most naturally aspirated, spark-ignited engines can tolerate higher ethane and propane levels without experiencing engine knock.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 172 of 250

- Lean-burn Natural Gas Engines. In contrast, most medium-and heavy-duty natural gas engines are based on lean-burn combustion, in which combustion occurs with more air (oxygen) than required to achieve complete combustion. Lean-burn engine technology typically uses turbocharging to compress combustion air and fuel to maintain high specific power output, which is usually reduced at lean air-fuel ratios. This approach also lowers peak combustion temperatures inside the engine and, as a result, reduces the formation of nitrogen oxides. Turbocharged lean-burn engines can approach the efficiency and power of heavy-duty diesel engines at full load operation. However, lean-burn engines are more likely to experience misfiring and pre-ignition or engine knock when higher-than-normal levels of propane and ethane components are present in the fuel. Lean-burn natural gas engines are usually derived from diesel engines, which use compression to ignite diesel fuel. For natural gas, an ignition source-typically spark or pilot ignition fuel-must be added. Ignition timing can be used to control combustion to avoid engine knock. Due to concerns regarding variations in fuel composition, some manufacturers have chosen to de-tune certain lean-burn engines by retarding spark ignition, resulting in some loss of performance and fuel efficiency.

The combustion process in engines may be sensitive to levels of methane and non-methane hydrocarbons, inert gases, and oxygen in the fuel composition delivered to the engine's cylinders. In the engine, variations in these components alter the energy content of the fuel and thus require changes in the air-fuel ratio to burn properly. Precise engine control technology can effectively optimize performance and minimize emissions. Engine control systems should have the ability to sense changes in fuel composition and other operating parameters, either directly or indirectly, and to compensate for changes by modifying the delivered air-fuel ratio and ignition timing.

Natural gas and air can be delivered to engine combustion cylinders by way of three fueling systems: conventional carburetion, single-point (or throttle-body) fuel injection or multi-point fuel injection, and direct fuel injection. Carburetion, the simplest method, was widely used on stationary and vehicle engines through the mid 1980s but has virtually been abandoned today because its imprecise control of the fuel-air mixture often results in unacceptable performance and emissions. The choice of multi-point or single-point injection depends largely on engine type and design. Both are electronically controlled by a microprocessor that uses data from various engine sensors (e.g., engine speed, load, temperature, ambient temperature, etc.) and proprietary algorithms to regulate the optimum air-fuel ratio for a specific engine design.

The electronic controls that meter the flow of fuel and air can operate in one of two modes: closed-loop control or open-loop control. Closed loop engine con-

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 173 of 250

trol systems use an exhaust oxygen sensor (or similar feedback mechanism) in the exhaust stream to monitor combustion products. The sensor signals the presence of oxygen. This data can indicate an out-of-specification equivalence ratio, and if such exists, the microprocessor corrects the metered air-fuel ratio. This process occurs several times each second. If a variation in natural gas composition or air density occurs, the effect on combustion is immediately detected and factored into the air-fuel ratio calculation on a continuous basis.

Light duty stoichiometric engines can use a standard stoichiometric exhaust gas oxygen sensor for the necessary feedback controls. It is currently more difficult to apply closed-loop electronic control systems to lean-burn engines since the range of oxygen content in the exhaust requires sensors that are different and more expensive than those applied in stoichiometric engines. In addition, closed loop systems have been used in gasoline stoichiometric engines for some time, allowing greater experience in production and incremental product improvements. However, promising sensors for lean-burn engines are entering commercialization. First generation systems are more susceptible to fuel quality related operational problems than more recent advanced generation systems. In general however, closed loop systems are tolerant of changes in fuel composition.

By contrast, open-loop engine control systems incorporate many of the same electronic features as closed-loop systems but do not have oxygen-sensing capability and adaptive learning features. Open loop systems use a predetermined "map" of load and speed to determine the engine fuel injection requirements. A specified fuel composition must be assumed to generate this "map. Consequently open loop systems are less tolerant of changes in fuel composition. They are capable of providing excellent engine performance and low emissions where gas composition is relatively constant, but they are unable to adapt to variable gas composition and other operating factors.

Some higher compression ratio heavy-duty lean burn engines include an additional feedback for knock detonation. Higher compression ratio makes an engine more susceptible to knock or detonation. If knock is detected via an accelerometer, the spark plug timing can be retarded, or caused to spark later in the cycle, to reduce knock. Retarding the timing, however, can reduce fuel economy.

C.4.4 Effects of Gas Composition on Engine Performance

The performance and emissions of spark-ignition gas engines depend on good ignition, optimum combustion rate, high knock resistance and a sufficient energy content of the fuel mixture. When using natural gas as a fuel the following fuel properties are important in relation to engine performance:

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 174 of 250

- Density
- Heating value (i.e. the Wobbe Index)
- The stoichiometric air-fuel ratio
- Knock resistance.

These gas properties are closely linked to the composition of the gas. Thus variations in gas composition can have important effects on engine performance and emissions; especially if the engine is optimized for maximum performance and efficiency on a fixed gas composition and is not equipped with means of adjusting to other compositions.

The equivalence ratio is a fundamental engine operating variable which defines base efficiency and engine-out emissions characteristics of the engine (equivalence ratio is the ratio of the actual fuel-air ratio to the stoichiometric fuel-air ratio. A mixture with an equivalence ratio of less than one is lean). As discussed in Section 5.6.2, it also defines the type of combustion system and the applicable method of emissions control.


Typical emissions trends as a function of the relative air-fuel ratio, λ , are shown in Figure C.4.1 (λ is the reciprocal of the equivalence ratio). Maintaining the desired equivalence ratio, or λ , under all operating conditions is the critical factor in minimizing emissions and maximizing efficiency.

Stoichiometric engines run basically at an equivalence ratio of 1 (λ of 1 as well), and in low emissions applications they rely on three-way catalysts for emissions control and they require very precise mixture control to achieve simultaneous control of CO, HC and NO_x emissions. The equivalence ratio operating window for natural gas three-way catalysts is narrower than for gasoline and at a slightly richer set point.

Figure C.4.1 – Effect of Air – Fuel Ratio on Emissions in Reciprocating Engines

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 175 of 250

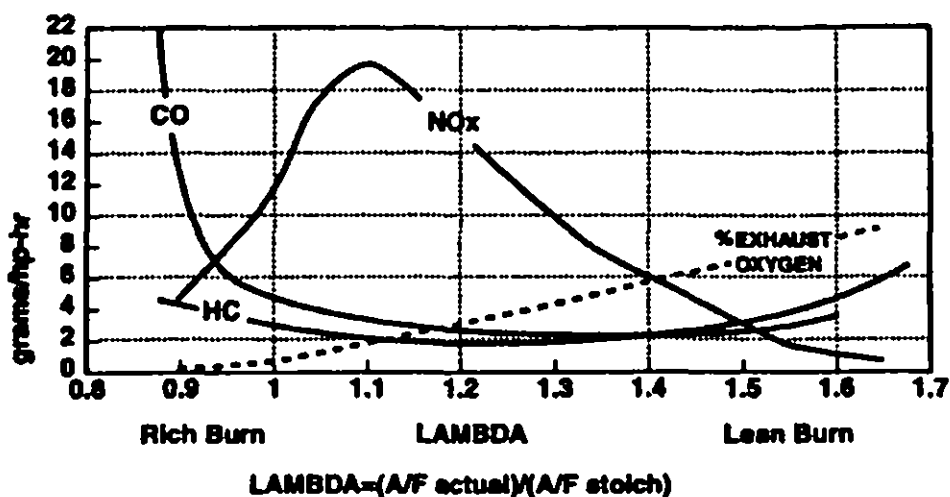

Lean burn (equivalence ratio less than 0.75, lambda greater than 1.33) natural gas engines achieve low NOx levels, even without exhaust aftertreatment, by operating with lower peak combustion temperature than stoichiometric engines. Often lean burn engines operate very close to the lean flammability limit of the fuel-air mixture and small variations in equivalence ratio can either result in engine misfire or high NOx emissions.

Since the stoichiometric air-fuel ratio varies with fuel composition, the quantity of fuel metered by the engine fuel system may also be affected, potentially changing the equivalence ratio to the engine. Thus changes in gas composition which affect the equivalence ratio will affect engine performance and emissions, whether it is a stoichiometric engine or a lean burn engine.

The fuel composition can also affect the composition of any unburned hydrocarbon emissions. Composition of the hydrocarbons is important because of the question of catalyst efficiency and atmospheric reactivity. Fuel composition also affects the knock resistance of the fuel, an important consideration in optimized natural gas engines.

There exists in the literature a limited body of work on the effects of natural gas composition variations on the performance and emissions of natural gas engines, most focused on vehicle applications. Some of the more often cited works are:

- Dubel et al (1983) examined the effects of composition on methane number (MN) and engine performance optimization and found that MN provided a good indication of the fuel's ability to achieve acceptable efficiency within the knock limit spark advance.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 176 of 250

- Klimstra (1978) examined the relationships between gas composition and mixture properties and reported on the effect on stoichiometric air-fuel ratio, heating value and the Wobbe Index, and knock sensitivity.
- Jones et al (1983) found that an engine optimized on one gas composition demonstrated significant performance penalties when run on a gas of different composition.
- Boschan et al (1989) found that the compositional effects on NO_x emissions due to variations in the methane number are compounded by the effects on the stoichiometric air-fuel ratio. The total hydrocarbon emissions were found to decrease with increasing Wobbe Index, perhaps due to the higher reactivities of the higher hydrocarbons, which are present in higher Wobbe Index fuels.
- Ryan and Callahan (1991) examined the effects of various gas compositions on emissions from a single-cylinder test engine. The results verified significant effects of three variables on performance and emissions – equivalence ratio, spark timing, and chemical composition. However, since composition influences equivalence ratio and optimum spark timing, the work verified the importance of maintaining the correct air-fuel ratio as gas composition changes.
- Bevilacqua (2001) examined the impact of natural gas composition on light-duty and heavy-duty natural gas vehicle emissions, fuel economy and drivability.

The body of work cited above indicates that the influence of gas composition on engine behavior can be adequately characterized by two measures: the Wobbe Index and the methane number. The Wobbe Index is a measure of the fuel interchangeability with respect to its energy content and metered air/fuel ratio. In engine applications, changes in the Wobbe Index are proportional to changes in stoichiometric air-fuel ratios. If the Wobbe Index remains constant, a change in the gas composition will not lead to a noticeable change in the air-fuel ratio and combustion rate. But this change in composition may change the volumetric energy content and knock resistance of the mixture. Since this measure disregards the different combustion properties of methane, propane and ethane components, it is not useful as an indicator of the knock resistance of the fuel.

The methane number is a measure of the knock resistance of the fuel. Knock, or detonation, can be extremely damaging to an engine. Knock occurs when there is uncontrolled combustion proceeding along a flame front initiated at the spark

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 177 of 250

plug. Knock can result from the heat produced by compression of the air/fuel gas mixture in the piston. The knock resistance of the fuel is a function of the fuel composition. Methane has a very high knock resistance. The heavier hydrocarbons in natural gas, such as ethane, propane, and butane have lower knock resistance and thus reduce the overall knock resistance of the fuel.

C.4.4.1 Effects on Engine Efficiency

An important fuel factor that determines engine efficiency is the maximum acceptable compression ratio. A high thermal efficiency requires a high compression ratio, and hence fuels with a high knock resistance. Natural gas has a higher knock resistance than gasoline. Engines designed with a high compression ratio to match this high knock resistance will show significant increase in efficiency. A second important factor determining the efficiency of an engine is the fuel/air ratio. The efficiency peaks in the lamda range of 1.05 to 1.30.

C.4.4.2 Effects on the power output

A mixture that contains slightly more fuel than is necessary for complete combustion ($\lambda < 1$) yields the highest power output. A change in λ has a much greater effect on power capacity than a change in gas composition. Increasing λ involves adding excess air, leading to a lower energy content of the mixture. In naturally aspirated engines an increase from $\lambda = 1.0$ to 1.5 (i.e. 50% excess air) may lead to a power loss of 30%. With turbocharged engines the power loss is recouped by raising the inlet charge density.

C.4.4.3 Effects of gas composition on ignitability

In spark ignition (Otto cycle) engines, the ease with which a mixture ignites depends on the air/fuel ratio and gas consumption. There is a strong correlation between ignitability and λ . Ignition of natural gas usually presents no problems if λ falls between 0.9 and 1.5. In an open combustion chamber, an air/fuel ratio corresponding to λ of 1.65 can be achieved. This provides a possible approach to reducing NOx emissions through very lean burn combustion.

C.4.4.4 Effects on the combustion rate

The combustion in a spark ignition combustion chamber normally starts at the spark plug and spreads to the walls of the combustion chamber. To keep fuel consumption at an acceptable level, the combustion rate should not be too slow,

while combustion that is too fast may cause a high mechanical load and noise production. Variations in fuel mixture composition affect the speed of combustion. An increase in lamda from stoichiometric leads to a longer duration of the process. This means that if engines have been timed for stoichiometric combustion, the timing should be advanced if the mixture is lean. The addition of inert gasses such as nitrogen and carbon dioxide results in a lower combustion rate and again a need to advance spark timing. Turbocharging can be used to compensate for this effect.

C.4.4.5 Effects of composition on knock

In a normally operating engine the combustion process proceeds progressively. This is not so in the case of knock combustion. Knock is caused by a local pressure pulse in the cylinder as a result of spontaneous combustion of part of the fuel/air mix. It occurs when the temperature of any unreacted mixture reaches the self-ignition point following piston compression and partial combustion. Knock combustion may damage the cylinder and in particular the piston rings.

Mixtures with a high self-ignition temperature have a high knock resistance. A good indicator of fuel behavior and particularly its knock resistance, is the methane number. Methane, a fuel with a high knock resistance, is assigned a methane number of 100. Hydrogen, a very knock-sensitive fuel, is given a value of 0.

The higher the concentration of higher hydrocarbons, the more likely it is that the fuel will cause knock, and thus lower the methane number. Adding other gasses to natural gas may have a major effect on the methane number.

Table 1. Methane number (MN) and octane number (MON) of some fuel gasses (IGU/IANGV 1994).

Fuel Gas	MN	Mon
Methane	100	122
Ethane	44	101
Propane	32	97
Butane	8	89
Hydrogen	0	63

Research has shown that the ratio between the octane number, used for petrol and the methane number is almost linear. Table 1 presents the methane number and the octane number for several gas components. To ensure that gas engines will operate without knock in service, engine manufacturers specify minimum knock resistance properties of the fuel. For heavy-duty engines, the manufacturers specify minimum MON or MN. As an example, Deere Power Systems and Detroit require minimum MON of 118 and 115 respectively. Through

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 179 of 250

advanced controls systems, Cummins has been able to reduce the minimum MN from 80 for its standard engines to 65 for its Plus Technology engines.

C.4.4.6 Emission effects of gas composition

The emissions components of major concern from natural gas are NO_x, CO, HC and CO₂. The production of NO_x is determined by the peak temperature in the combustion process and the availability of oxygen. If the gas composition changes, the formation of NO_x is only affected if the peak temperature changes or if the air/fuel ratio changes. CO is produced by lack of air (λ less than 1.0) and by quenching of the flame against cool surfaces. It is minimally affected by changes in gas composition if the air/fuel ratio is constant. The major source of HC is the clearance at the top-land of the piston. HC emissions tend to increase with leaner mixture because of lower temperatures and flame speed.

Variations in gaseous fuel composition can effect the level of these pollutant emissions. The primary effect is due to variations in the Wobbe Index; this can affect the air/fuel ratio and thus engine out emissions. Given appropriate engine control hardware and software, reasonable variations in Wobbe Index have little effect on emissions from stoichiometric engines with three-way catalysts and closed-loop feedback by means of an O₂ sensor. This is because the feedback control system makes it possible to compensate for variations in air/fuel ratio.

In addition to their effects on the Wobbe Index, differences in the concentration of different hydrocarbons in the fuel can affect the species composition and reactivity of the HC emissions in the exhaust. This effect is of considerable regulatory importance, since US emissions standards for vehicles limit emissions only of non-methane hydrocarbons (NMHC). The proportion of NMHC in the fuel directly affects the levels of NMHC emissions in the exhaust.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 180 of 250

C.4.5 Existing Gas Composition Guidelines for Natural Gas Engines

C.4.5.1 Engine Manufacturers' Recommendations

To ensure that their engines will work satisfactorily and durably in end-use applications, engine manufacturers normally require information on the composition of the natural gas in the location of use. They also issue recommended fuel specifications to guide users. Table C.4.2 lists recommended fuel composition and combustion properties from a number of manufacturers.

Table C.4.2 Recommended gas composition ranges by select natural gas engine manufacturers (SAE, 2001 and Detroit Diesel Corporation, 1998).

Component	Tolerance	CAT Dual-Fuel	Cummins	Deere	Detroit	Mack
Hydrocarbons						
Methane	Minimum	88.0%	90%		88%	85%
Ethane	Maximum	6.0%	4%		6%	11%
C ₃ +	Maximum	3.0%				
Propane	Maximum		1.7%	5%	1.7%	9%
C ₄ +	Maximum		0.7%		0.3%	
C ₅ +	Maximum	0.2%				
Butane	Maximum			1%		5%
C ₂ +C ₃ +C ₄						11%
Inerts (N ₂ , CO ₂)	Range/Max	1.5-4.5%	3.0% total			2% N ₂ 3% CO ₂
Oxygen	Maximum	1.0%	0.5%			
Hydrogen	Maximum	0.1%	0.1%		0.1%	
CO	Maximum	0.1%	0.1%			
Sulfur	Maximum		0.001% by mass		22 ppm by mass	
Methanol	Maximum				0%	
CO ₂ +N ₂ +O ₂	Maximum				4.5%	
Wobbe Index (Btu/scf)	Range		1290 - 1365		1270 - 1360	
Octane Rating (MON)	Minimum			118	115	
Methane Number (MN)	Minimum		80 (standard engines) 65 for Plus Technology			
Lower Heating Value	Minimum		43.7 MJ/kg for Plus Technology Engines	897 Btu/scf		
Higher Heating Value	Minimum		965 Btu/scf (standard engines)			

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 181 of 250

Original equipment manufacturers (OEMs) place a very high value on maintaining customer satisfaction and the reputation of their products. OEM concerns about gas composition differ markedly between "natural gas vehicle OEMs," which predominantly produce cars and light trucks using gasoline-derived engines with closed-loop control systems, and heavy-duty "engine OEMs," which typically produce diesel-derived engines with lean-burn combustion and open- or closed-loop engine controls. While these two groups share common interests in the effects of gas composition on the integrity and reliability of fueling system components, they differ with respect to gas composition requirements for optimum engine operation.

Engine OEMs are concerned with the effects of variability on engine performance and durability. Almost all engine OEMs have established formal or informal specifications of natural gas composition based on the tolerance to heavier hydrocarbons that can cause engine knock, damage, or otherwise unacceptable performance. As shown in Table 2, some engine OEMs recommend very low levels of propane. Minimum methane levels are also specified around 90 mole %, which falls near the national mean but which, like all constituents, may be subject to local and time-dependent aberrations. While engine OEM specifications are designed to protect their engines from "worst-case" gas, most recognize the need for more detailed data on the effects of gas composition on the performance and durability of specific engine designs.

Unlike engine OEMs, vehicle OEMs have not generally developed in-house specifications for gas composition but have participated in industry-wide forums such as the Auto/Oil Air Quality Improvement Research Program. Gas composition variations have less potential to seriously affect the operation or durability of stoichiometric engines with closed-loop control, so their concerns are more related to the reliability and safety of fueling systems and to gas composition specifications used in emissions certifications testing by CARB and the U.S. EPA.

The concern regarding certification testing relates to the way in which closed-loop engine controls function. While such systems have adaptive learning capability, an engine must warm up before such controls can become effective. The first few minutes of operation are based on preprogrammed values for fuel composition, similar to the normal operating mode of open-loop engine control systems. If the certification test fuel differs from what is assumed, the starting air-fuel ratio could be incorrect and degrade test results. The relative proportion of specific hydrocarbon components may also influence emissions directly in some engines. The impacts of variations in the specific components such as ethane and propane have not been established but have received the attention of some regulators.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 182 of 250

Overall, from the perspective of OEMs, both vehicle and heavy-duty engine manufacturers, tightly defined certification gas compositions are important to the task of designing engines and controls systems that meet the requirements of current certification testing protocols.

C.4.5.2 Existing Gas Quality Standards For Natural Gas Vehicles

An effort to develop national standards for compressed natural gas (CNG) was initiated in 1980 by the American Gas Association (AGA) Methane Powered Vehicle Systems Committee. Some of the industry groups involved in vehicular compressed natural gas composition issues include the Society of Automotive Engineers (SAE), American Society for Testing and Materials (ASTM), Natural Gas Vehicle Coalition (NGVC), National Fire Protection Association (NFPA), and the U.S. Consortium for Automotive Research (USCAR). As a result of these and other efforts, a recommended industry practice was established (SAE J1616) to accommodate the requirements of NGV engine and vehicle applications:

C.4.5.2.1 SAE J1616

Subject to periodic review and updating, SAE J1616 was issued in its current version in 1994. As a recommended practice, it is the basis for ongoing education, debate, and discussion among industry groups. SAE J1616 recommends specific fuel properties at the fueling station dispenser, as the CNG is delivered to the vehicle, not as it arrives at the fueling station. It places considerable emphasis on physical and chemical properties that can contribute to corrosion in cylinder and fueling system components. Recommendations that impact engine performance and emissions include:

Carbon Dioxide: Corrosive environments for fueling system components and cylinders is controlled via recommendations on limited water concentration, so no limits are required on the concentration of CO₂ for this purpose. However, a limit of 3.0% CO₂ by volume is recommended to help maintain proper stoichiometry.

Sulfur Compounds: The total content of sulfur compounds, including odorants, would be limited to 8-30 ppm by mass to avoid excessive exhaust catalyst poisoning.

Pressure hydrocarbon dewpoint temperature: SAE J1616 notes that propane injected into natural gas by utilities for peakshaving purposes raises the possibility of hydrocarbon liquid condensation under certain CNG operating pressures and temperatures. If an excessive amount of propane "drops out" of the fuel and subsequently returns to gaseous form as the tank pressure is drawn down, elevated levels of propane can be delivered to the engine, causing variations in the fuel Wobbe Index and posing the risk of engine knock. To minimize such problems, SAE J1616 limits propane content in gas delivered to the vehicle such

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 183 of 250

that the potential liquid formation not exceed 1% of the cylinder volume at pressures between 800 to 1200 psig and at the lowest published monthly ambient temperatures for the local fueling station.

Wobbe Index: Variability in the Wobbe Index affects most significantly engines that are not equipped with closed loop controls. A Wobbe Index range of 1300 to 1420 Btu/scf is recommended, although a range of 1200 to 1250 has also been found acceptable for use on current equipment in high altitude areas. The recommended range, typical of most U.S. natural gas, would allow maximum variation from nominal air-fuel ratio of about 13.7% which is comparable to the range in variation of gasoline density.

Knock rating: The resistance of a fuel to autoignition is a fundamental fuel characteristic. No recognized test method presently exists for the determination of Motor Octane Number (MON) of natural gas. No specific recommendations are given on the MON rating of natural gas.

C.4.5.2.2 Emissions Certification Test Fuels

Federal and state agencies involved in certifying vehicles and engines as meeting emissions standards specify the composition of test fuels to ensure consistency and repeatability of test data. The California Air Resources Board (CARB) has published certification test fuel specifications for CNG, and the U.S. EPA has similar specifications. Such specifications, which are designed to represent typical in-use gas compositions, specify hydrocarbon, oxygen, and Inert as concentrations. Certification test specifications are of obvious importance to manufacturers, but they have limited practical importance to vehicle operators and fuel providers.

CARB has gone one step further in publishing specifications for commercial CNG motor fuel sold to vehicles in the state. The CNG specification took effect on January 1, 1993. CARB's specifications are subject to change based on availability of additional data on the effects of gas composition on emissions performance. CARB CNG specification are compared with SAE J1616 guidelines and fuel requirements of typical heavy-duty engine manufacturers in Table C.4.3.

Table C.4.3. Comparison of CNG Fuel Specifications and Guidelines for Selected Components.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 184 of 250

Specification	SAE J1616	Engine OEMS ⁹	CARB ¹⁰
Methane	¹¹	>87% min.	88.0% min.
Ethane	^c	4-8% max.	6.0% max.
Propane	¹²	1.7%-3.0% max.	3.0% max.
C ₄ and higher hydrocarbons	^d	0.7-2.3% max.	0.2% max.
Wobbe Number	1300-1420 ¹³	1270-1365	N.S.
Hydrogen	No limit	0.1-2.0% max.	0.1% max.
Carbon Monoxide	3.0%	0.1% max.	0.1% max.
Oxygen	Below combustion	0.5-1.0% max.	1.0% max.
Water	¹⁴	-	^f
Particulate matter	<5 micron	N.S. ¹⁵	-
Total Sulfur	1 gr/100 scf	N.S. ⁹	16 ppm

C.4.6 Summary

The body of work cited above indicates that the influence of gas composition on engine behavior can be adequately characterized by two measures: the Wobbe Index and the methane number. The Wobbe Index is a measure of the fuel interchangeability with respect to its energy content and metered air/fuel ratio. In engine applications, changes in the Wobbe Index are proportional to changes in stoichiometric air-fuel ratios. Stoichiometric gas engines with closed loop engine control systems can maintain adequate performance and emissions over the range of Wobbe Index currently experienced in the United States by sensing the oxygen content in the engine exhaust and adjusting the air-fuel ratio as required. It is currently more difficult to apply closed-loop electronic control systems to lean-burn engines since the range of oxygen content in the exhaust requires sensors that are different and more expensive than those applied in stoichiometric engines. However, promising sensors for lean-burn engines are entering commercialization and all major engine manufacturers are currently offering lean burn engines with closed loop controls. In general, new engines with closed loop systems are relatively tolerant of changes in fuel composition.

In contrast, open-loop engine control systems that use a predetermined "map" of load and speed to determine the engine fuel injection requirements are less tolerant of changes in fuel composition. A specified fuel composition must be as-

⁹ Based on limited data; requirements for diesel-derived engines.

¹⁰ California Air Resources Board, commercial fuel specification for CNG.

¹¹ In lieu of specific hydrocarbon concentrations, SAE J1616 specifies a Wobbe Number for energy content.

¹² Limited by pressure hydrocarbon dew point limit for local climate.

¹³ SAE J1616 notes that a Wobbe Number of 1200 to 1250 has been found acceptable in high-altitude areas.

¹⁴ Limited by pressure dew point temperature for local climate.

¹⁵ Not specified.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 185 of 250

sumed to generate this "map" and, consequently, open loop systems are unable to adapt to variable gas composition and other operating factors.

Gas delivered in the Narrow Range (1289 to 1383 Wobbe) will most likely not pose any problems in terms of engine performance or emissions for existing or new stoichiometric and lean burn engines. Gas delivered in the Medium, Broad and Asymmetric Ranges will most likely be problem free on the high end for stoichiometric engines with closed loop controls based on comparison to the SAE J1616 guidelines. However, the low end of both the Asymmetric and Broad Ranges are significantly below the lower limit of the SAE J1616 guideline of 1300 Wobbe for light duty stoichiometric engines. The lower limits of the Asymmetric and Broad Ranges are also significantly below the lower limits of the heavy duty lean burn engine manufacturers guidelines. The high end of the Broad Range is significantly above the higher limits of the heavy duty lean burn engine manufacturers guidelines. A significant percentage of the existing population of gas engines in power generation and pipeline compression applications utilize open loop control systems. There is currently insufficient data on the potential impact on emissions and knock sensitivity of the Medium, Broad and Asymmetric Ranges. Testing of these ranges on larger engines with open-loop control systems would be invaluable, particularly for the large bore 2-cycle engines used for pipeline compression.

Since the Wobbe Index disregards the different combustion properties of methane, propane and ethane components, it is not useful as an indicator of the knock resistance of the fuel. If the Wobbe Index remains constant, a change in the gas composition will not lead to a noticeable change in the air-fuel ratio and combustion rate. But this change in composition may change the volumetric energy content and knock resistance of the mixture. Knock, or detonation, can be extremely damaging to an engine. Knock occurs when there is uncontrolled combustion proceeding along a flame front initiated at the spark plug. The knock resistance of the fuel is a function of the fuel composition. Methane has a very high knock resistance. The heavier hydrocarbons in natural gas, such as ethane, propane, and butane have lower knock resistance and thus reduce the overall knock resistance of the fuel.

Stoichiometric engines with closed loop engine controls have the ability to adapt to moderate changes in Wobbe Index and, to a certain extent, antiknock fuel properties. However, it is important to note that published test results on performance and emissions have been limited to normal variations in gas composition. For this reason, it would be premature to assume that such engines are immune from serious performance effects from elevated levels of propane and ethane. The case is much clearer for lean burn diesel-derived engines. Their greater sensitivity to these higher hydrocarbons poses a potential threat to engine performance and durability.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 186 of 250

Concerns about knock damage have prompted heavy duty engine manufacturers to set limits on propane of 3% or lower. These levels are not temperature related and are much lower than the SAE J1616 guidelines for preventing hydrocarbon liquid condensation in engine fueling systems or NGV cylinders. Levels exceeding the maximum set by engine manufacturers are possible, though not common, in regular natural gas supplies and would certainly be exceeded in a propane-air peakshaving situation. Further quantification of the effects of propane levels on both stoichiometric and lean burn engines are needed and may influence future revisions of allowable propane limits. High ethane levels may also contribute to engine knock and damage in lean burn engines. Allowable limits set by engine manufacturers are in the range of 4% to 8%. However, insufficient experimental results and field experience with elevated ethane levels make it difficult to draw conclusions about the severity of engine impacts and the extent and duration of unacceptably high levels of ethane at specific locations.

With increasingly stringent emissions standards, both stoichiometric and lean burn engines need to be fitted more often with catalytic exhaust aftertreatment systems. The stoichiometric engine utilizes a three way catalyst that is capable of simultaneously reducing NO_x and oxidizing CO and HC. Air-fuel ratio, fuel composition, and exhaust temperature all have major impact on the performance of the catalyst. To overcome the effect of fuel composition variations, the engine control systems will need to respond to these changes and still maintain air-fuel ratios within the narrow window (which also narrows with catalyst ageing) required for good conversion efficiency.

On a lean burn engine, an oxidation catalyst is often used to reduce CO and HC emissions. Methane in particular is difficult to oxidize, and is even more problematic in lean burn engines with relatively low exhaust temperatures. Typical values for methane reduction in a lean burn oxidation catalyst are as low as 30 to 50%. Even the relatively low values of sulfur found in natural gas odorants can poison oxidation catalysts, further reducing the level of methane reduction.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 187 of 250

Appendix D

Monitoring Interchangeability and Combustion Fundamentals

Edgar Kuipers,
Shell Trading

The definition of interchangeability is linked to combustion issues. In this appendix on interchangeability parameters we will therefore also limit ourselves to combustion issues. The impact of a change in gas supply on feedstock plants and infrastructure will be discussed separately.

Interchangeability was an important issue at the start of the natural gas business, as in most places natural gas was introduced as a replacement for manufactured gas. Manufactured gas was made by heating bituminous coal in the absence of air. The knowledge gained about interchangeability at that time has later been used for and adapted to design specifications for the use of LPG/air mixtures for peak-shaving and the blending of rich locally produced gas with lean gas supplies. Most gas quality specifications used today are based on the interchangeability research done 10 – 50 years ago.

D.1 "First principles" of Combustion


Combustion devices utilize natural gas to produce heat for a variety of purposes, from home cooking to power generation. The combustion properties of natural gas depend on the mode in which the fuel is burned and especially on the amount of air available for combustion, leading to following burner categorisation;

Diffusion and Partial pre-mix Burners:

In conventional or diffusion burners, fuel and (part of the) air are fed separately into the flame zone. The picture below shows a schematic diagram of such a conventional 'Bunsen-type' burner. Pressurized gas flows through the orifice of a nozzle into a venturi where the primary air is introduced. Fuel and primary air will mix while accelerating through the venturi and enter into the primary combustion zone. In the primary combustion zone the fuel will be partly combusted with the premixed primary air. In the secondary combustion zone, the combustion process will be completed with secondary air that diffuses into the flame front.

White Paper on
And Non-Comb

Exhibit No. FGT-8
Page 188 of 250

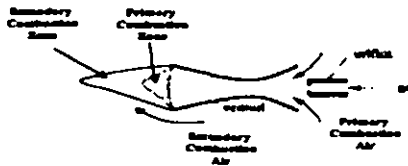

Diffusion and partly pre-mix burners are common in residential and industrial burners and in older power generation plants especially those built prior to 1990. Diffusion mode combustion is also common in industrial boilers and certain appliances. Flames burning in diffusion mode tend to have a partly yellow color.

Lean premixed burners:

In lean-premixed burners, the fuel and all of the combustion air are mixed upstream of the combustion zone. The amount of premixed air sets the fuel-air ratio at which the combustion takes place, allowing control of combustion temperature, CO and NOx formation.

Modern, low emission burners such eg used in power generation plants operate in lean premixed mode.

Interchangeability concerns:

As the purpose of determining and requiring the interchangeability of fuels is to ensure continued operability of burners for different fuels, it is important to understand the combustion characteristics that can be affected by fuel composition.

Typically, discussions of the interchangeability of gases have addressed the following characteristics:

- Flame shape and stability (both of which are related to flame speed)
- Flame color
- Combustion efficiency
- Flue gas composition (CO₂, NO_x, CO, water)

In this section we will provide a basic understanding of those combustion issues for the different types of burners. We will then use this basic understanding to discuss the impact of gas composition in more detail. Combustion of gas

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 189 of 250

however is a very complex process and thus first principles will not be fully sufficient for a thorough understanding of all aspects.

Thermal input:

The thermal input (btu/hour) or gross thermal load of a burner, Q_{Btu} , will be mainly determined by the design and setting of the burner as well as the gas composition. In this chapter we will assume that the design and setting are fixed and only focus on the remaining impact of gas quality.

The gross thermal load of a burner can be written as:

$$Q_{Btu} = HV * Q_v \quad (1)$$

where HV is the gross calorific value (btu/scf) of the gas and Q_v is the volumetric gas flow rate (scf/hour).

At constant pressure the volumetric flow Q_v through the orifice of a nozzle is inversely proportional to the square root of the relative density G of the gas¹.

$$Q_v \propto 1/\sqrt{G} \quad (2)$$

Where the relative density is defined according to ISO6976 as the ratio of the density of a gas to the density of air under the same stated conditions of temperature and pressure².

Combining (1) and (2) above results in the following relation for the thermal burner load:

$$Q_{Btu} \propto HV/\sqrt{G} \quad (3)$$

Goffredo Wobbe was the first to describe this relationship³ ⁴ and thus the following has been defined as the Wobbe index:

$$W = HV/\sqrt{G} \quad (4)$$

Combining this definition with (3), leads to the conclusion that ***the thermal burner load is directly related to the Wobbe Index of the fuel gas.***

Air supply:

¹ Pritchard, Gny and Connor, *Industrial Gas Utilization 1977*, ISBN 0-85935-059-2

² ISO 6976

³ *Monats-Bull. schweiz Ver. Gas- u. Wasserfach* (1927), 7, 277-8

⁴ *Ind. Gas acquedolli, (Rome)* (1926)

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 190 of 250

The air supply (whether natural draft, forced, primary or secondary) will be mainly determined by the design and setting of the burner. Once those have been set, the air supply is fixed and will not be influenced by the gas quality. Thus for the discussions in this chapter on the impact of gas quality, we can assume the air supply to be constant.

Equivalence ratio:


As we will show later on, the most important single parameter for combustion performance is the so-called equivalence ratio, ϕ , defined as the amount of air required for complete combustion of fuel supply, divided by the air supply to the combustion zone, or in other words the air-requirement/air-supply ratio.

$$\phi = F_{\text{air, st}} / F_{\text{air, act}} \quad (5)$$

in which $F_{\text{air, st}}$ is the volumetric stoichiometric air requirement (scf air/hour) and $F_{\text{air, act}}$ is the volumetric actual air supply (scf air/hour) to the combustion zone. A stoichiometric fuel/air mix has $\phi = 1$, whereas a mix with excess air has $\phi < 1$.


Properties of Alkanes⁵:

The main components of natural gas are alkanes (methane, ethane, propane, butane, ...) and inerts. Both the calorific value of alkanes as well as the amount of air required for stoichiometric combustion (volumetric air/fuel ratio at $\phi = 1$) increase with carbon number as is shown in the following graphs:

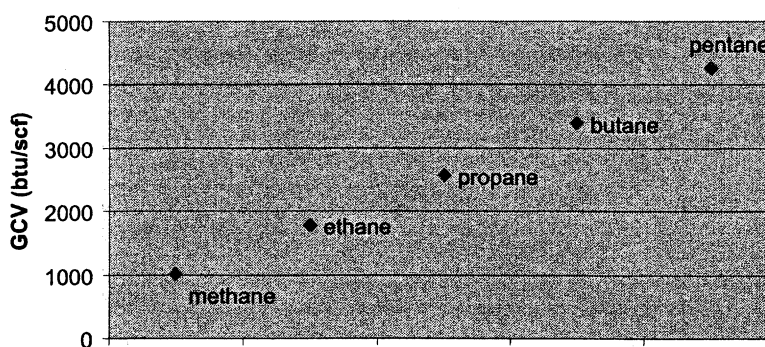


⁵ Alkanes (also known as paraffins) are saturated hydrocarbons with general formula C_nH_{2n+2} where n is an integer eg Methane, ethane, propane, butane.

White Paper on Natural Gas
And Non-Combustion En

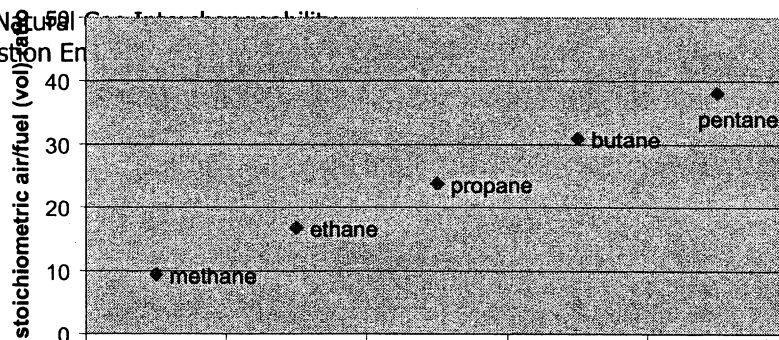Exhibit No. FGT-6
Page 191 of 250


But one of the peculiar properties of alkanes is that the volumetric air/fuel ratio at $\phi=1$ divided by the calorific value, ie the amount of air required for stoichiometric combustion to release a specific amount of heat, stays almost constant independent of carbon number to within 5% from methane up to pentane as shown in the next plot:

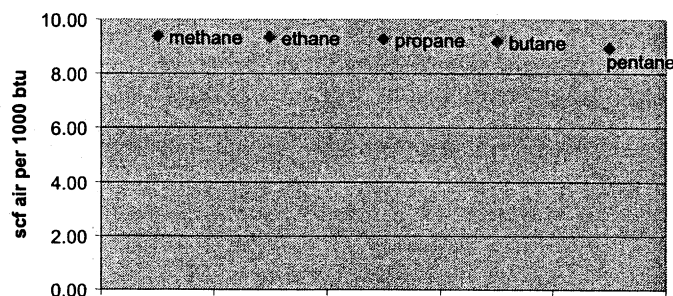

This means that the stoichiometric air supply requirement, $F_{air, st}$, for an alkane mixture is directly related to the thermal burner load, Q_{Btu} :

$$F_{air, st} = c * Q_{Btu} \quad (6)$$

Where c is a constant (scf/btu) and the air stoichiometric air requirement to combust 1 btu of alkanes.

Equation 6 can be rewritten as, by replacing Q_{btu} for the Wobbe index, W :

$$F_{air, st} \propto W \quad (7)$$

This tells us that the stoichiometric air requirement is directly related to the Wobbe index.

Combining equations 5 and 7, we get the following for the equivalence ratio:

$$\phi = F_{air, st}/F_{air, act} \propto W/F_{air, act} \quad (8)$$

As discussed above, substitution of one gas for another should not have any impact on the actual air supply to the combustion zone, so $F_{air, act}$ is independent

of the fuel composition. When substituting one gas for the other the relative equivalence ratio can now be written as:

$$\frac{\phi_1}{\phi_2} = \frac{W_1}{W_2} \quad (9)$$


Thus for the interchange between an adjustment gas and a substitute gas, consisting of alkanes and inerts, the relative equivalence ratio is to a very good approximation given by the Wobbe Index ratio.

D.2 First principles applied to combustion performance and interchangeability

D.2.1 Flame Temperature:

The flame temperature will depend directly on the equivalence ratio. At low equivalence ratio's ($\phi < 1$, ie excess air) all fuel is likely to be consumed but the energy that is released in the process will have to heat the excessive amount of nitrogen and air resulting in a relatively low flame temperature. At some point, the lower flammability limit, the equivalence ratio becomes too low for combustion to take place.

As the amount of excess air is reduced, moving closer to stoichiometry ($\phi = 1$), there is less excess air to heat, leading to an increase of the flame temperature. However once the equivalence ratio increases beyond stoichiometric point ($\phi > 1$) there is not sufficient air for complete combustion and thus the flame temperature will drop again. This is schematically shown in the following diagram:

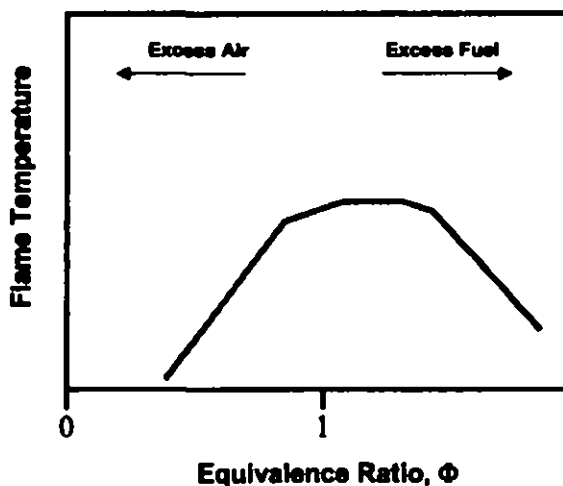

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 193 of 250


The importance of the equivalence ratio for flame temperature is exemplified by the small differences in adiabatic flame temperature for the various alkanes as shown in the next table for $\phi=1$:

Adiabatic Flame Temperature (F) for $\phi=1$	
Methane	3484
Ethane	3540
Propane	3573
Butane	3583

D.2.2 Flame Speed; Lifting/Flashback

The flame speed is very relevant for the combustion performance, as it is one of the factors that determine flame shape and stability.

The flame speed can be linked to the flame temperature and thus also depends on the equivalence ratio. The highest laminar flame speed is achieved for a fuel/air mixture that is slightly above stoichiometry, as shown schematically in next picture.

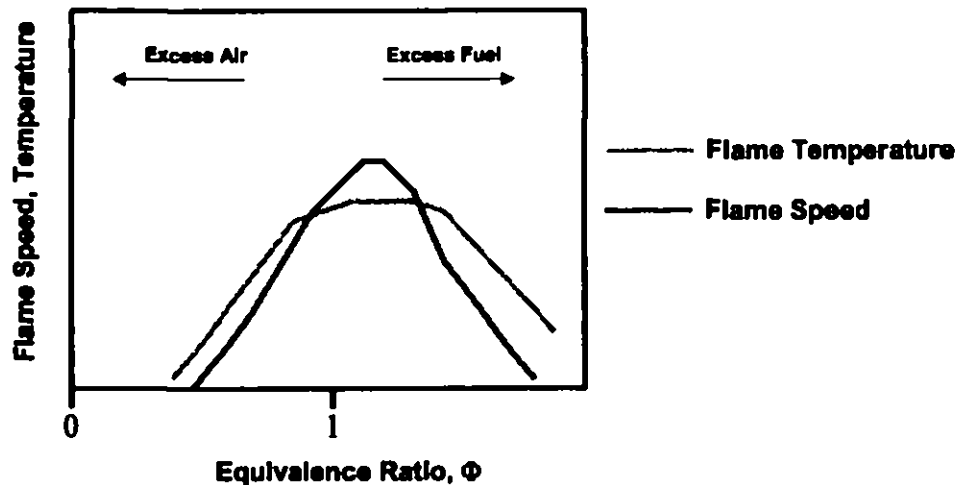


The importance of the equivalence ratio for flame speed is exemplified by the differences in laminar flame speed for the various alkanes as shown in the next table for $\phi=1$:

Laminar Flame Speed (cm/s) for $\phi=1$	
Methane	38.3
Ethane	40.6
Propane	42.3
Butane	42.6

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 194 of 250

The flame speed determines the flame shape and stability, as at a stable flame front the flame speed and flow velocity have to be in balance, see next diagram:

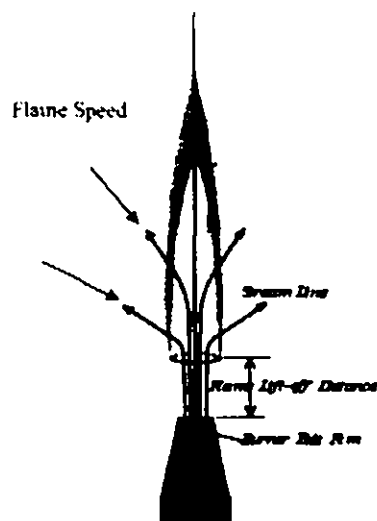

An increase in flame speed will cause the flame to move upstream into the burner tip. For premixed flames in the extreme case this can even lead to the flame moving inside the burner causing so-called flash-back.

A decrease of flame speed will cause the flame front to move further downstream of the burner, also called lifting. In the extreme case the flame speed will always be smaller than the flow speed and thus the flame will blow-off and extinguish.

Experimentally by the Gasunie have shown that at constant equivalence ratio a variation in the natural gas composition only has a small impact on the flame speed⁶. Thus the impact of a change in gas composition on flame speed is mainly dictated by its impact on the equivalence ratio. Or in other words the impact of gas quality on flame speed is related to the Wobbe index. The lower order corrections on the Wobbe index can become relevant in lean premixed combustion especially when operating near the lower flammability limit of the fuel. The Wobbe index also falls short if the natural gas contains non-alkane components such as e.g. H₂, olefins or O₂.

In summary, the flame speed of an alkane/air mixture is almost solely determined by the equivalence ratio and as such is directly related to the Wobbe index.


⁶ A.Hoven and H. Levinsky; International Gas Research Conference 1998 Proceedings p 7.

D.2.3 NO_x emissions

In the combustion process, relatively small amounts of nitrogen oxides (NO_x) are formed. Nitrogen oxides are mainly composed of nitric oxide (NO), a colorless gas, and nitrogen dioxide (NO₂), which is a brownish gas that can be visible in the exhaust plume. Although in the past the impact of gas quality on NO_x emissions was generally not specifically addressed, presently NO_x emission levels have become an important performance indicator and regulated pollutant, which must be taken into consideration when discussing interchangeability.

NO_x is generated during combustion of hydrocarbon fuels through a variety of mechanisms. We will discuss the two NO_x formation mechanisms that are most relevant for the combustion of natural gas; the Zeldovich and Fenimore Mechanism;

Zeldovich or 'thermal' NO_x⁷ is created through the oxidation of N₂ introduced with the combustion air. The thermal mechanism consists of three elementary reactions:




The activation energy for this reaction is very high (0.137 MMBtu/lb-mole) and as a consequence this reaction is strongly dependent on the flame temperature, and only occurs at temperatures > 3950 °F. As discussed earlier on the equivalence ratio has a strong impact on the flame temperature, an increase of air supply above stoichiometric requirements will reduce the flame temperature and thus the NO_x formation via this Zeldovich mechanism. Lean-premixed Low NO_x burners typically operated at a equivalence ratio of ~0.6.


The third mechanism is called the Fenimore mechanism:

⁷ Zeldovich, Y. B., P. Y. Sadonikov, and D. A. Frank-Kamenetskii, 1947: Oxidation of nitrogen in combustion (M. Shelef, Transl.). Acad. Sci. USSR, Inst. Chem. Phys., Moscow-Leningrad.


White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 196 of 250





The activation energy for the Fenimore mechanism is quite low (90 kJ/mol) and as such can be the dominant NO_x formation process at lower temperatures. The NO formed via this mechanism is also called 'prompt NO' as it is mainly formed in the early stage of combustion, where hydrocarbons are still present. This is a similar reaction mechanism to 'thermal NO' but catalyzed by the presence of CH as shown in the above reaction equations. The Fenimore reaction will be more significant under fuel-rich conditions.

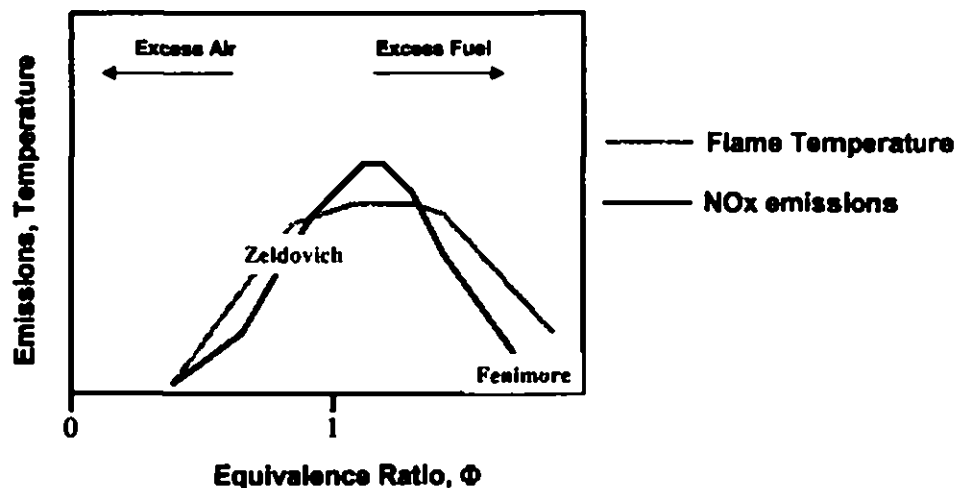

Summarizing, there are various NO_x formation mechanisms, of which the Zeldovich mechanism is the most important one for natural gas fired burners. The Zeldovich mechanism has a high activation energy and as a consequence the reaction rate will strongly depend on the flame temperature, which is almost solely determined by the equivalence ratio. The influence of gas quality is therefore mainly via the equivalence ratio. Hence, at constant equivalence ratio, a variation in the natural gas composition only has a second order impact on the amount of NO_x formation.

D.2.4 CO emissions


Incomplete combustion of natural gas can result in the presence of Carbon Monoxide (CO) in the exhaust gases. The presence of CO in exhaust gases is a health and safety issue, as CO is highly toxic (50 ppm permissible exposure limit). CO levels in exhaust gases should therefore not exceed certain limits⁸.

In partially premixed Bunsen-type flames, the post-flame-front gases are in chemical equilibrium. The CO equilibrium values will depend strongly on the equivalence ratio and the CO concentration will increase with an increase in the equivalence ratio. There is however also a second order dependence on the C/H ratio of the fuel as the amount of carbon in the combustion zone at a fixed thermal input will slightly increase with C/H ratio resulting in higher CO emissions.

Most of the 'equilibrium-CO' will burn out to CO₂ further down stream where it comes into contact with secondary air, but some CO will slip through and end up in the flue gas. An increase in CO equilibrium concentration will lead to an increase in CO in the flue gas.

Increased CO can also result from excess air, as excess air can quench the combustion process and as a consequence not all CO is fully oxidized to CO₂. This can also be linked to flame lift and possible fuel slippage around the sides of the flame.

Both phenomena are shown in the following schematic diagram:

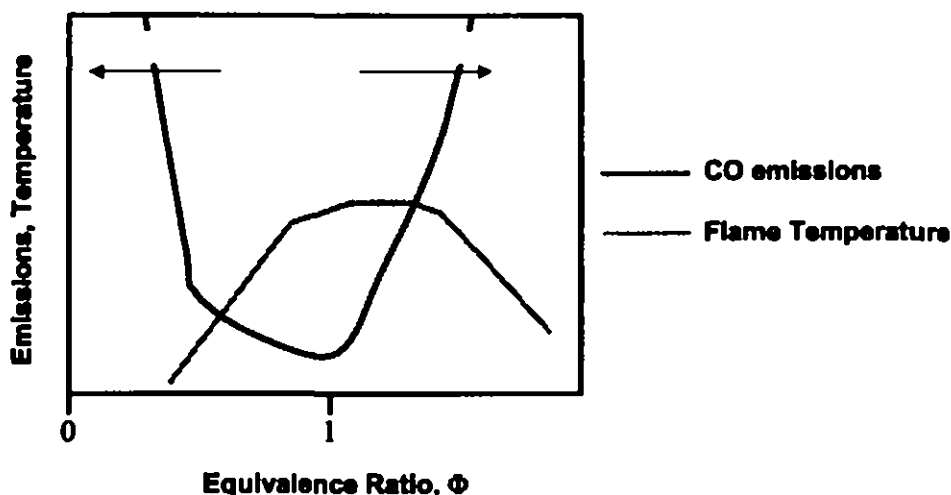

⁸ American National Standard ANSI Z21 & ANSI Z83

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 198 of 250

The influence of gas quality is again mainly via the equivalence ratio, set by the Wobbe index. At constant Wobbe index a variation in the natural gas composition only has a very small impact on the amount of CO formation⁹.

D.2.5 Soot/Yellow Tipping

Another relevant issue for combustion performance is the flame color, which can change from blue to yellow. Natural gas burners are usually adjusted such that it produces a flame that is mostly of a blue color. However a change in equivalence ratio might change the flame tip to yellow. The figure below shows a properly adjusted burner with a blue flame whereas the second picture shows an ill-adjusted burner with yellow tip.



Yellow tipping is caused by the formation of soot in the primary flame front. Yellow tipping in itself is not necessarily a concern, as the soot formed in the primary flame front will subsequently be burned in the secondary flame front. In some appliances yellow tipping is even desired for decorative reasons, e.g. log fires. However in some cases (e.g. extreme yellow tipping or quenching on heat exchanger) the soot might not fully burn and thus cause soot deposits, which affects equipment performance as well as its useful life.

Soot formation and yellow tipping is a complex process related to the equivalence ratio. An increase of equivalence ratio will increase the tendency for yellow tipping. However, since different alkanes have different tendency to soot, the equivalence ratio alone is not sufficient to describe yellow tipping. Fuel composition is also a factor. Generally yellow tipping tendencies have been determined using empirical parameters developed by AGA and the Bureau of Mines and which will be discussed in a later section.

⁹ Presentation Prof H Levinsky, 'Interchangeability from first principles', NGC meeting DC July 2004.

D.2.6 Impact of gas composition on combustion performance

The equivalence ratio is an important parameter that influences combustion performance. The impact of gas composition on NO_x emissions, CO emissions and shape and stability of natural gas flames can to a large extent be explained via its impact on the equivalence ratio.

As the air supply to the combustion zone is dependent on the individual equipment design and independent of the gas composition, then the impact of gas quality is dictated by the Wobbe index.

The exact impact of a change in Wobbe index will however very much depend on burner type. We will differentiate the following categories:

1] Partially premixed burners ($\phi > 1$, i.e. excess fuel):


The majority of household appliances in the US use partial premixing, resulting in $\phi > 1$ for the primary combustion zone. A decrease in Wobbe index will shift the equivalence ratio in the primary combustion zone closer to stoichiometry, whereas an increase will shift the equivalence ratio in the primary combustion zone away from stoichiometry as shown in the next graph. This does not represent the impact on the secondary combustion zone.

2] Lean premix burners ($\phi < 1$, i.e. excess air):

Modern appliances, e.g. condensing boilers, move away from the above mentioned partial premixed ($\phi > 1$) to lean-premixed ($\phi < 1$) in order to achieve a better environmental performance (optimum balance between NO_x and CO emissions).

3] No premix:

Most industrial flames are not premixed. As a consequence most of these burners will operate close to stoichiometry at $\phi \sim 0.8-0.9$. Also, whereas domestic burners will produce laminar flames, some industrial burners will produce turbulent flames with combustion at near stoichiometry.

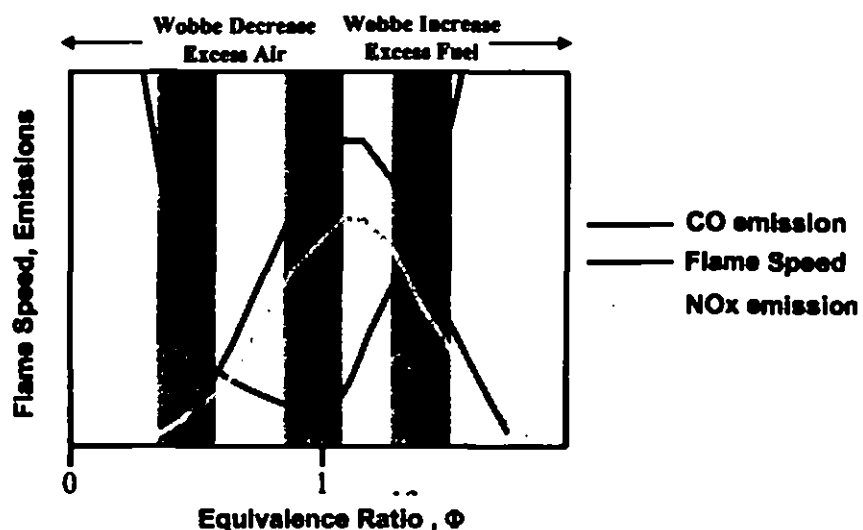


White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 200 of 250

D.2.7 Impact of ambient conditions (temperature, humidity, elevation)

Changes in ambient conditions will have an impact on the equivalence ratio.

Humidity: The combustion air will contain water vapor. The relative humidity and temperature dictate the volume percentage of water vapor in the air as shown in the graph below. The graph shows that the amount of humidity in natural gas will fluctuate by a few mol% due to change in ambient temperature and relative humidity. As a consequence the effective air supply and thus the equivalence ratio will change a few percent.

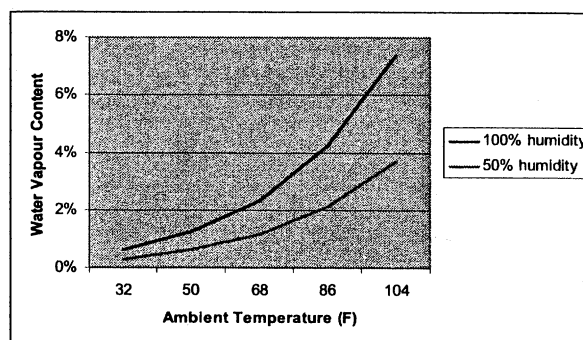


Ambient temperature: The temperature of the gas and air supply has an even stronger impact on the equivalence ratio than the humidity. If the temperature of the gas supply, T_{gas} (Rankine) goes up, its density and calorific value will go down with $1/T_{\text{gas}}$, as a consequence the Wobbe index will go down with $1/\sqrt{T_{\text{gas}}}$. The impact of a temperature change is shown in next graph, assuming 68F as reference point. A change of the gas temperature of $\pm 10\text{F}$ will change the fuel supply by $\pm 1\%$. Similarly a change of combustion air temperature will change the air supply density. Especially in the case of preheating gas and/or air supplies, it is important to take this effect into account. Thus fuel specifications for gas turbines, on which pre-heat is common, will make use of a modified Wobbe index that incorporates this effect^{10 11 12}.

¹⁰ GEI 41040F, Process Specification, Fuel gases for combustion in heavy duty gas turbines.

¹¹ Specification ES9-98, Fuel, air, and water (or steam) for Solar gas turbine engines

¹² 21T0306 Gas fuel specification for Westinghouse W251, W501, W701 series

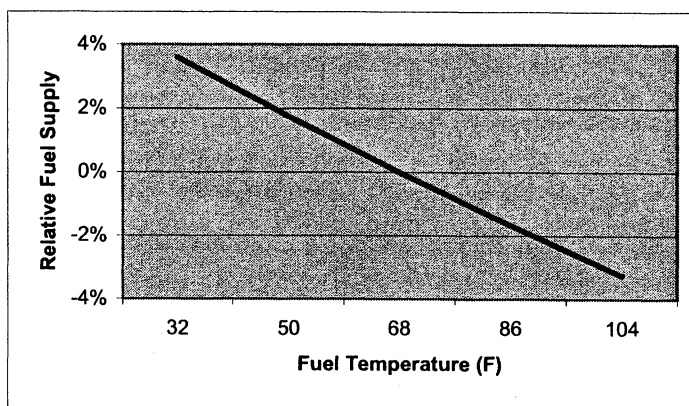White Paper on Natural Gas Interchangeability
And Non-Combustion End UseExhibit No. FGT-6
Page 201 of 250

Elevation: The operation of appliances at high elevations can be complicated by the effect of reduced atmospheric pressure on the densities of combustion air and natural gas. Gas-fired appliances are designed for a given input rating at sea level, i.e., designed to burn a given flow of fuel specified in Btu/h. The air density decreases with altitude, and with it the oxygen concentration as well as the air density. The net effect is that at high altitudes, less oxygen is drawn into the combustion zone and thus less gas can be burned completely in a given time, so the fuel gas flow rate must be restricted. Traditionally, appliance input ratings have been derated by 4% for every 1000 ft of elevation gain at elevations greater than 2000 ft. Effectively, this deration has required the use of smaller orifices at high altitudes to slow the fuel flow to the burner. However, deration by this rule may not be necessary for mid- and high-efficiency appliances, especially those, with power-assisted combustion, and the manufacturer's installation instructions provide the necessary deration requirements. The *National Fuel Gas Code* (ANSI Z223.1, NFPA-54) lists the following methods for deration: the 4% rule, local building codes, and manufacturer's specifications.

D.3 Interchangeability Parameters:

Over the past 50 years, a number of parameters have been developed throughout the world to address interchangeability. The following is a brief description of the major parameters:

D.3.1 Wobbe index

The equivalence ratio is an important parameter determining combustion performance. The impact of gas composition on NO_x emission, CO emission and the shape and stability of natural gas flames can to a large extent be explained on the basis of equivalence ratio. The air supply to the combustion zone is

independent of the gas composition. The impact of gas quality on fuel supply is dictated by the Wobbe index.

Thus the impact of gas composition on CO emission, NOx emission and flame speed can be quite accurately estimated on the basis of the Wobbe index, without the need to take specific gas compositional aspects into account.

However the Wobbe index does not provide a fully comprehensive description of interchangeability for all applications, e.g. in case of yellow tipping the Wobbe index as such is not sufficient. The Wobbe index will also not provide a complete description of the interchangeability for lean premixed burners. For a more complete description additional parameters are required. Usually this is done by an additional limit on heating value or setting separate compositional restrictions. Examples of this will be discussed in section 5.

D.3.2 Modified Wobbe Index

In the fuel specifications for gas turbines the Wobbe Index takes a central role¹³
¹⁴. There is only a slight difference in that commonly a modified Wobbe Index, W_{mod} , is being used: $W_{mod} = \frac{HV_{net}}{\sqrt{G \cdot T_{gas}}}$, where HV_{net} is the Net Calorific Value (NCV), instead of the Gross Calorific Value, and T_{gas} is the Rankine temperature of the fuel gas at the fuel nozzle inlet. The temperature correction reflects the fact that the fuel gas is preheated prior to mixing with air in order to prevent condensation of liquids and increase the efficiency of combined cycle plants and the impact this has on the fuel supply ratio as explained previously. Preheat temperatures usually vary from 80 F to 360 F.

Sometimes the Modified Wobbe Index is also referred to as the Gas Index.

Turbine manufacturers use HV_{net} instead of the HV used in the common Wobbe index, as flue gases will leave the turbine with water in the vapor phase. Thus the use of HV_{net} in the modified Wobbe index gives a better reflection of the thermal burner load for a gas turbine with preheated fuel.

Note that the Modified Wobbe Index must be calculated using the temperature at the fuel nozzle inlet, not at inlet to the transmission and distribution grid.

D.3.3 AGA

¹³ GEI 41040G; Specification for fuel gases for combustion in heavy-duty gas turbines, GE publication.

¹⁴ Siemens Westinghouse Gas Fuel specifications for W251, W501, W701 series, June 2001

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 203 of 250

More than 50 years ago, AGA conducted extensive experimental studies on gas interchangeability. Tests were done on a specially developed Bunsen-type burner with partial premixing, the so-called AGA "precision burner". Based on this experimental work several empirical parameters were developed to address Yellow Tipping, Flame Lift and Flash Back (flash back was relevant as the use of manufactured gas was still quite common). This work has been published in AGA Bulletin 36¹⁵; Acceptable limits for the Lifting Index (IL), Flash-Back Index (IF) and Yellow Tip Index (IY) were determined. The indices are not absolute numbers but are based on a reference or adjustment gas that is typically representative of the historic gas serving a particular area.

The following tables are copied from the AGA Bulletin 36 and provide AGA's empirical constants as well as the formula's required for calculation. Subscript "s" denotes substitute gas and subscript "a" denotes an adjust gas.

TABLE 3—Gas Interchangeability Calculation Sheet
 SECTION I

Adjustment Gas							Substitute Gas						
G _s	A	A _s	F	F _s	T	T _s	G _s	A	A _s	F	F _s	T	T _s
Analysis of Gas Decimal Volume	Air Required Per Comb. (Cu Ft/Cu Ft of Gas)	G _s x A	Lifting Constant	G _s x F	Yellow Tip Constant	G _s x T	Analysis of Gas Decimal Volume	Air Required Per Comb. (Cu Ft/Cu Ft of Gas)	G _s x A	Lifting Constant	G _s x F	Yellow Tip Constant	G _s x T
H ₂	2.26		0.0		0.0		H ₂	2.26		0.0		0.0	
CO	2.26		1.467		0.0		CO	2.26		1.467		0.0	
CH ₄	9.53		0.67		2.18		CH ₄	9.53		0.67		2.18	
C ₂ H ₆	16.68		1.419		8.8		C ₂ H ₆	16.68		1.419		8.8	
C ₃ H ₈	25.23		1.951		9.8		C ₃ H ₈	25.23		1.951		9.8	
C ₄ H ₁₀	30.97		2.55		16.85		C ₄ H ₁₀	30.97		2.55		16.85	
C ₅ H ₁₂	14.20		1.760		8.7		C ₅ H ₁₂	14.20		1.760		8.7	
C ₆ H ₁₄	21.44		2.06		12.0		C ₆ H ₁₄	21.44		2.06		12.0	
C ₇ H ₁₆	25.73		2.71		22.0		C ₇ H ₁₆	25.73		2.71		22.0	
IL*	19.85		2.0		19.23		IL*	19.85		2.0		19.23	
O ₂	-4.76**		2.0		-4.76**		O ₂	-4.76**		2.0		-4.76**	
2 CO ₂			1.08				2 CO ₂			1.08			
N ₂			0.688				N ₂			0.688			
Total	1.00						Total	1.00					

Total Inerts: $I_s =$
 Flaming Value: $h_s =$
 Specific Gravity: $d_s =$
 *Representative analysis of 2 C₂H₆ + 1 C₃H₈
 **Always negative. Subtract from total.

Total Inerts: $I_s =$
 Flaming Value: $h_s =$
 Specific Gravity: $d_s =$

¹⁵ AGA Research Bulletin 36, Interchangeability of other fuel gases with natural gases, 1946.

II. SUMMARY OF REMITS AND CONCLUSIONS

White I
 And Nc

TABLE 2 Continued—Gas Interchangeability Calculation Sheet

Exhibit No. FGT-6
 Page 204 of 250

Aspirant Gas		Reference Gas	
Air Theoretically Required for Complete Combustion per 100 Mo:	$a_s = \frac{100 A_s}{h_s}$	100 A _s	$a_s = \frac{100 A_s}{h_s}$
Primary Air Factor:	$f_s = \frac{1000 \sqrt{d_s}}{h_s}$	1000 $\sqrt{d_s}$	$f_s = \frac{1000 \sqrt{d_s}}{h_s}$
Lifting Limit Coefficient:	$K_s = \frac{F_s}{d_s}$	F _s	$K_s = \frac{F_s}{d_s}$
Yellow Tip Limit:	$Y_s = \frac{100 T_s}{A_s + 7 F_s - 26.8 D_s}$	100 T _s	$Y_s = \frac{100 T_s}{A_s + 7 F_s - 26.8 D_s}$

NOTATION II

$$\text{Lifting Interchangeability Index: } I_L = \frac{K_s}{f_s a_s} \left(K_s - \log \frac{f_s}{f_r} \right)$$

$$\text{Wobbe-Rank Interchangeability Index: } I_r = K_s f_s \sqrt{\frac{h_s}{1800}} = \frac{K_s f_s}{K_r f_r}$$

$$\text{Yellow Tip Interchangeability Index: } I_T = \frac{f_s a_s Y_s}{f_r a_r Y_r}$$

* Limits of Interchangeability for Various Base Load Natural Gases


Interchangeability Index	High Heating Value Natural Gas		High Medium Natural Gas		High Low Natural Gas	
	Preferable	Objectionable	Preferable	Objectionable	Preferable	Objectionable
I_L	Under 1.0	Above 1.15**	Under 1.6	Above 1.08**	Under 1.0	Above 1.08**
I_r	Under 1.18	Above 1.2	Under 1.18	Above 1.3	Under 1.18	Above 1.2
I_T	Above 1.0	Under 0.7	Above 1.0	Under 0.8	Above 1.0	Under 0.9

*For application of limits see discussion, page 55.

**This value was found to equal $\frac{K_s}{K_r}$ for the 8 adjustment gases used in the investigation.
 1.105

Although the formulas in the tables above do not make this immediately clear, there is a link between AGA criteria and the Wobbe index and Heating Value of the gas. This can be exemplified by calculating the AGA parameters for many different natural gases and by plotting the data in a 2-dimensional plot with color reflecting a fail or a pass of the AGA interchangeability as done in the next graph.

AGA Indices

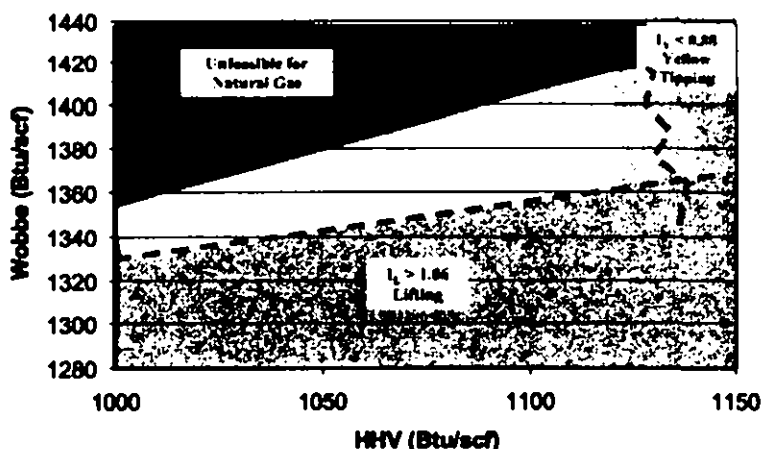

----- Empirically determined, wrt reference gas C1=95%, C2=4%, C3=0.25%, N2=0.75%

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 205 of 250

D.3.4 Weaver/Bureau of Mines

In the 1950's while working for the U.S. Bureau of Mines, E.R. Weaver expanded the AGA test regime on lifting, yellow tipping and flash back, by adding separate parameters for incomplete combustion, burner load and air supply. These included values such as flame speed and incomplete combustion.

Below, are the formulas required to calculate the Weaver interchangeability indices:

$$1) J_A = A_s \sqrt{D_s} / (A_a \sqrt{D_a})$$

is the Weaver index for air supply.

$$2) J_F = S_s / S_a - 1.4 J_A + 0.4$$

is the Weaver index for flashback. For gases that are exactly interchangeable with respect to flash-back, $J_F = 0$

$$3) J_H = H_s \sqrt{D_s} / (H_a \sqrt{D_a})$$

is the Weaver index for burner load and is equivalent to a Wobbe index ratio.

$$4) J_I = J_A - 0.366 R_s / R_a - 0.634$$

is the Weaver index for incomplete combustion. For exact interchangeability $J_I = 0$

$$5) J_L = J_A (S_s / S_a) (100 - Q_s) / (100 - Q_a)$$

is the Weaver index for lifting. For exact interchangeability $J_L = 1$

$$6) J_Y = J_A - 1 + (N_s - N_a) / 100$$

is the Weaver index for yellow tipping. For gases that are exactly interchangeable, $J_Y = 0$

As with the AGA calculations, the subscript "a" denotes the original adjust gas and subscript "s" the new substitute gas. The constants and factors in the above indices are defined as follows:

A = cubic feet of air required for the complete combustion of 1 cubic foot of gas.

D = relative density of gas expressed as specific gravity referred to air as unity.

S = maximum flame speed in a mixture of the gas with air, expressed as a fraction of the flame speed for hydrogen

$$S = \frac{aF_a + bF_b + cF_c + \dots}{A + 5Z - 18.8Q + 1}$$

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 206 of 250

In which a, b, c, ... are the fractions by volume of various combustible constituents of the fuel gas, F_a, F_b, F_c, \dots are corresponding values of the coefficient F listed below, A is the volume of air required to burn one volume of gas, and Z and Q are, respectively, the fraction by volume of inert gases, chiefly carbon dioxide and nitrogen, and of oxygen in the fuel.

Gas	Gross Calorific Value (btu/scf); H	Specific Gravity; D	Air requirement; A	Flame Speed Factor; Fa
Methane	994.1	0.55	9.55	148
Ethane	1757	1.04	16.71	301
Propane	2535	1.56	23.87	398
Butane	3330	2.09	31.03	513
N2	-	0.97	-	-
Carbondioxide	-	1.53	-	-
Oxygen	-	1.11	-4.78	-

Where:

H = heating value of gas in Btu/scf.

R = ratio of number of atoms of hydrogen in all forms of combination in the fuel gas to the number of carbon atoms in the hydrocarbons. (carbon monoxide is excluded)

Q = percentage of oxygen in the fuel gas.

N = number of "readily liberated atoms" of carbon per hundred molecules of gas. All carbon

atoms of unsaturated and cyclic hydrocarbons and all but one atom per molecule of saturated hydrocarbons are considered to be readily liberated.


Hence, N represents the number of carbon atoms in hydrocarbons minus the number of molecules of saturated hydrocarbons.

Although the formulas in the tables above do not make this immediately clear, there is a link between Weaver criteria and the Wobbe index and Heating Value of the gas. This can be exemplified by calculating the Weaver parameters for many different natural gases and by plotting the data in a 2-dimensional plot with color reflecting a fail or a pass of the Weaver interchangeability criteria as is shown in the next graph. From this graph it is clear that the Weaver Interchangeability criteria, can to a good extent be set by limits on the heating value and the Wobbe index .

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Weaver indices

Exhibit No. FGT-6
 Page 207 of 250

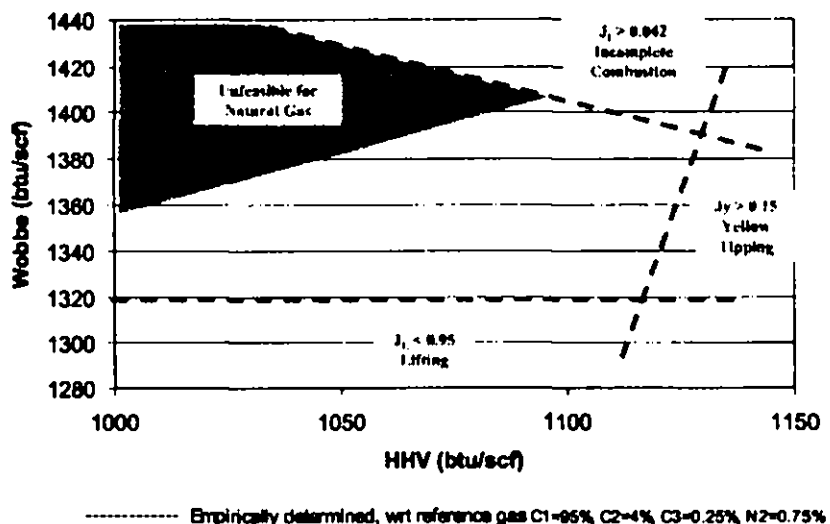

D.4 Setting gas quality specifications

D.4.1 Selection of the interchangeability parameters: Wobbe, AGA or Weaver

The impact of gas composition on CO emissions, NOx emissions and flame speed can to a large extent be understood on the basis of the Wobbe index. This makes the Wobbe index a simple, easy to calculate and robust parameter to describe interchangeability.

However, some of the empirical parameters such as the Weaver indices can give a more accurate description of several specific interchangeability issues on partially premixed Bunsen-type burners. The diagram plotted above shows the discrepancy between the Wobbe index and the various Weaver indices. The discrepancies will increase with a step-out on gas composition (i.e. step-out on heating value). The discrepancy for lifting is negligible. The discrepancy for incomplete combustion is small. The discrepancy for yellow tipping is significant. However, by adding an upper limit to the gross calorific value (GCV) the interchangeability area is almost identical as that achieved by limit on three Weaver indices for a mixture of alkanes and inerts. Instead of a limitation on GCV this can also be achieved by a limit on specific density or by imposing separate compositional limits. In the next section we will provide examples for each of these. The resulting shortcomings of the Wobbe index are especially small if compared to fluctuations in the system caused by e.g. humidity, temperature and equipment settings.

Also note that although the Weaver indices give a better description than the Wobbe index of specific issues for a specific type of burner, it does not cover all interchangeability issues for all types of burners. To that end many more

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 208 of 250

parameters would be required. For example the Weaver indices do not cover NOx emissions, nor do they accurately predict the impact on lean premixed or no-premix burners. As such the use of the Weaver indices might depend on whether or not there is a specific interchangeability concern for a specific type of burner that sets the strictest constraint (e.g. for Cove Point the CO emissions from partially premixed domestic appliances were the main concern for Washington Gas Light and as such the Weaver incomplete combustion was the most appropriate parameter).

The advantages and disadvantages of a Wobbe index versus a Weaver index set are summarized in the next table. While focusing on the differences between the two, one should keep in mind that these differences are relatively small.

	Wobbe Index (combined with a limit on GCV or density)	AGA or Weaver Set
+	<ul style="list-style-type: none"> • Good generic description of interchangeability • Simple, easy to use • Common practice worldwide • Absolute numbers 	<ul style="list-style-type: none"> • Accurate description of Incomplete Combustion, Lifting and Yellow Tipping in partially premixed Bunsen-type burners
-	<ul style="list-style-type: none"> • Not fully accurate on some interchangeability issues and some burners 	<ul style="list-style-type: none"> • Not fully accurate on some interchangeability issues and some burners • Complex • Relative to Adjustment Gas

In the rest of this document we will mainly use the Wobbe index in our discussions, only referring to other parameters if specifically required.

D.4.2 'Short Duration' limits:

It is quite common to include clear guidelines for short duration excursions from standard gas quality specifications. Such guidelines can be very useful for following cases:

- Gas process failure, providing temporary alternative for supply shut down
- Peak demand, allowing temporary peak supplies (i.e. propane-air peak-shavers, LNG peak-shavers) that might not meet strict daily gas quality limits.

D.5 Interchangeability specifications:

D.5.1 – Examples of International Interchangeability specifications:

Much of the groundwork on interchangeability was done quite a while ago. Initially every national gas company had it's own gas appliance test program to

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 209 of 250

come up with it's own interchangeability criteria. In the USA, AGA and the Bureau of Mines leading to the AGA and Weaver indices did this work. In the UK, the work started with Gilbert and Prigg and was further improved by Dutton. In France, most of the work was done by Delbourg. A good overview of all this initial work has been provided by GRI¹⁶.

Previously it has been shown that the AGA, Weaver and Dutton interchangeability criteria can be viewed as 'corrections' to the Wobbe index to give a more accurate prediction of incomplete combustion, yellow tipping and lifting for partially premix Bunsen-type burners.

More recent interchangeability analyses draw on this earlier work, but recent gas quality specifications simplify to the basic Wobbe index range often with separate limits on gross calorific value and/or density. All the separate interchangeability indices are not included. Below we will give a list with some examples. Note this list is by far from complete:

Europe

The gas transmission networks of all European countries (including UK) are interconnected with one another. However, all the countries have their own national gas quality specifications (see below). With the implementation of a single internal gas market in Europe, the existence of different requirements throughout Europe regarding natural gas quality have appeared to be a potential barrier for interoperability of natural gas networks. A pan-European joint industry task force (EASEE-GAS) has been addressing the need to harmonize gas quality specifications for cross-border trade and gas imports. In 2005 this joint-industry task force reached agreement on harmonized gas quality specifications and a phased implementation approach¹⁷. The harmonized gas quality specifications use the Wobbe index as the interchangeability parameter with following range:

- Wobbe Max = 15.81 kWh/m³ (~1449 btu/scf)
- Wobbe Min = 13.76 kWh/m³ with targeted future lowering to 13.60 kWh/m³ (~1246 Btu/scf).

This reflects a +/-7.5% Wobbe range. EASEE GAS specifications contain additional limits on relative density (0.555-0.700). There are, however, no separate limits on Heating Value and/or hydrocarbon compositional limits.

Germany

¹⁶ GRI-80/0021; P.T.Harsha, R.B.Edelman and D.H.France, *Catalogue of existing interchangeability prediction methods*, 1980

¹⁷ EASEE-GAS CBP Gas Quality Harmonization February 2005, <http://www.easee-gas.org/>

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 210 of 250

In Germany gas quality specifications are set by the Deutsche Vereinigung des Gas- und Wasserfaches (DVGW)¹⁸. Germany has two sets of transmission networks, one for low (L) and one for high (H) calorific gas both with their separate Wobbe Index and density ranges.

Italy

In Italy the gas quality specification are set by Snam Rete Gas the company that operates the natural gas pipeline network in Italy. Gas quality specifications are set in their Network Code. The specifications provide limits for the Wobbe index as well as the density¹⁹.

Japan

Japan uses re-gasified LNG as well as manufactured gas. The main gas quality parameter is the Wobbe Index. There are two different Wobbe index ranges with the selected range based on the specific metropolitan area.

New Zealand

A committee with multiple stakeholder representatives prepared a joined proposal for a gas quality standard. The New Zealand Standards council accepted this proposal in 1999²⁰. The standard is based on the Wobbe Index with a separate limit on density.

Brazil

In Brazil the gas quality specifications are set by the Agencia Nacional do Petroleo. In 2002 the gas quality specification was revised. Separate gas quality specifications are set for three different regions in the country. The specifications are based on the Wobbe index but include separate limits on gross calorific value. The specifications also include separate compositional limits on methane, ethane, propane and butane²¹.

Mexico

In Mexico gas quality specifications are set for the entire natural gas pipeline and distribution network by the Secretary of Energy advised by the federal regulator, Comision Reguladora de Energia (CRE) and set in the NOM001. In its 2003 review CRE suggested to replace the original compositional constraints (C3+ limits) in NOM001 with a more meaningful Hydrocarbon dew point and limits on the Wobbe index and the Gross Calorific Value. The proposal was accepted by a

¹⁸ G260, *Technische Regeln Gasbeschaffenheit, Deutsche Vereinigung des Gas- und Wasserfaches e.V.*, January 2000.

¹⁹ Network Code SNAM Rete Gas, <http://www.snamretegas.it>

²⁰ New Zealand Standard 5442:1999

²¹ Agencia Nacional de Petroleo, Portaria 104, 8 July 2002

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 211 of 250

large majority of the stakeholders and the new NOM001 became effective in May 2004²².

Country	Wobbe Index Range	Other Parameters	Regional/National	Short Duration Limits	Year of last modification
EC	+/-7.5%	density	EC import and cross-border trade	No	2005
UK	+/-5%	Incomplete Combustion Factor + Sooting Index	National	Yes	1996
Germany	+/-10%	Relative Density	L-Cal and H-Cal network	Yes	2000
Italy	+/-5%	Relative Density and GCV	National	No	-
Japan	+/-5%	Combustion Potential ²³	Regional	-	-
New Zealand	+/-6%	Relative Density	National	Yes	1999
Brazil	+/-6%	GCV and Compositional Limits	Regional	No	2002
Mexico	+/-5%	GCV	National	Yes	2003

D.5.2 Examples of existing Interchangeability specifications in US:

D.5.2.1 Southern California Gas Company


Southern California Gas Company provides natural gas distribution services to over five million customers in Southern California. There are two sources for this gas, interstate gas suppliers and intrastate California gas suppliers. The interstate gas comprises about 88% of the total supply and originates primarily in the Rocky Mountains, Texas and in the San Juan Basin. The interstate gas supplies are delivered to the Southern California Gas Company system through six pipeline interties along the Colorado River and along the pipeline corridor between Needles and Bakersfield. The interstate gas supplies are delivered at forty-two locations, in the coastal areas from Orange County to Santa Barbara County, the Los Angeles Basin and in the San Joaquin Valley of Central California. Also, there is a supply from an intrastate utility Intertie in the San Joaquin Valley.

²² Norma Oficial Mexicana NOM-001-SECRE-2003

²³ Combustion Potential is a measure of flame speed. Flame speed parameters are relevant as Japan also uses manufactured gas.

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 212 of 250

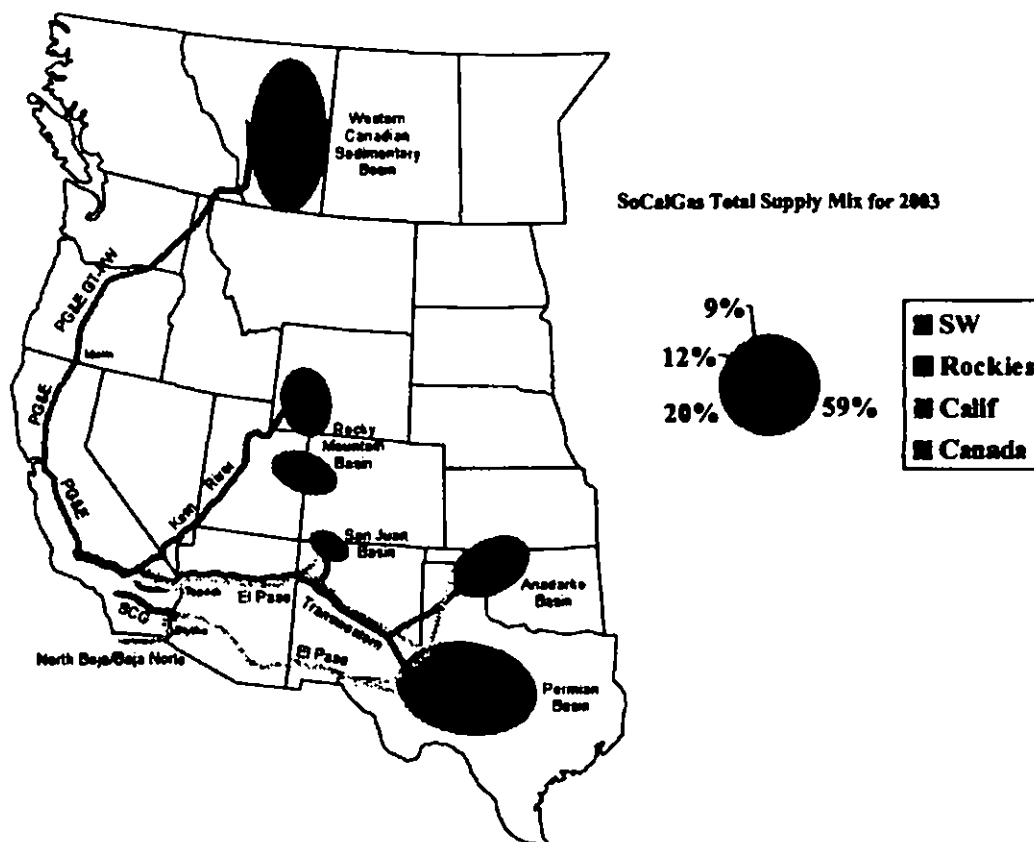

In 2003, the interstate supplies had a Wobbe number range from 1314 to 1373. The intrastate supplies had a Wobbe number range from 1270 to 1440.

Range of Acceptability (CPUC TARIFF Rule 30) has been used for more than 30 years by SoCalGas to determine if new supplies could be accepted. For supplies outside this range, interchangeability has been employed on occasion to provide entry into the system on a short term basis as long as the out of range gas can be managed. The interchangeability has been specified in contracts since 1985.

Meet the American Gas Association's Wobbe Number, Lifting Index, Flashback Index and Yellow Tip Index interchangeability indices for high methane gas, as revised by the American Gas Association from time to time, relative to a typical composition of Gas in Utility's system [near the points of receipt]. Acceptable specification ranges are:

Wobbe Number (W for typical system gas composition, W_p for Producer) : $0.9W \leq W_p \leq 1.1W$

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 213 of 250

- Lifting Index (I_L): $I_L \leq 1.06$
- Flashback Index (I_F): $I_F \leq 1.2$
- Yellow Tip Index (I_Y): $I_Y \geq 0.8$

Also included was a minimum Btu limit of 970 Btu/cf (high heating value dry). There was no maximum Btu limit specified in 1985.

In the early 1990s, higher efficient appliances were required and appliance service people were verifying that BTU input rates were within $\pm 5\%$ of the manufacturers rated input rate. In 1994, there were recent and potential Btu increases of more than 5% due to changes in local California gas production. SoCalGas investigated the field performance of residential and commercial appliances in these affected areas. The field investigation found no problems, but recommended that Btu fluctuations should be minimized to no more than a 15% Btu spread and to have it verified by a controlled engineering evaluation. A follow-up engineering study was conducted by SoCalGas in 1995, to establish an acceptable Btu range. It was found that most appliances tested performed satisfactorily from 970 to 1150 btu/cf. It was found that for some newer appliances (premixed burners) the AGA interchangeability calculations did not accurately predict performance. Based on these investigations, maximum btu limit of 1150 Btu/cf was added to CPUC Rule 30 (www.socalgas.com/regulatory/tariffs/tm2/pdf/30.pdf).

As a continual safety effort, SoCalGas has initiated tests and studies from 2003, along with others. These studies indicate a potential for improper equipment operation when fuel gas composition changes and air/fuel mixtures remain fixed or have limited capacity to adjust. SoCalGas has been assessing the acceptability of heating value ranges and is currently considering to replace the AGA Bulletin 36 interchangeability indices with a maximum Wobbe index of 1400.

D.5.2.2 QuestarGas Company

Questar Gas Company is a local distribution company held by Questar Corporation, an integrated natural gas company that also holds Questar Pipeline Company, an interstate pipeline company and Questar Market Resources Company, an unregulated exploration and production company. Questar Gas serves over 790,000 customers in three states – Utah, Southwest Wyoming, and Southeastern Idaho. Questar Pipeline transports the majority of Questar Gas' gas supplies from producing basins in the Rocky Mountain region. Questar Gas supplies its customers with gas purchased from third parties and obtained from its Company owned production. The producing basins in the vicinity of Questar

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 214 of 250

Gas' service territories are some of the fastest growing the United States. These basins include Green River, Uinta, Ferron, Sandwash, Overthrust, and Piceance. Questar Gas has historically relied on these producing basins to supply gas to its customers.

In 1929, Questar Pipeline's predecessor company constructed a pipeline from Southwest Wyoming to deliver gas from a newly discovered gas field near Rock Springs, Wyoming to customers along the "Wasatch Front", a series of communities that extend south to north and include Utah's population centers (Salt Lake City, Ogden, and Provo). The pipeline, in concert with the distribution market, stimulated the discovery of producing fields that were eventually connected to Questar Pipeline's system. Gas from these fields typically had high heat content. In addition, much of the production was not processed to remove heavy hydrocarbons, which contributed to the high delivered Btu value. Based on the supplies available during this early era, an appliance Btu set-point of 1088 (with a corresponding Wobbe index of 1386) was established. For over sixty years, the Btu content of the gas delivered to Questar Gas trended downward, but not to a level to cause concerns about interchangeability.

By the late 1990's, at least three trends developed that signaled the potential for gas interchangeability problems in the future. First, Questar Pipeline observed that as the price spread between natural gas liquids and natural gas widen (A Dth of liquid was more valuable in the liquid phase than the gas phase), processors delivering gas to Questar Pipeline with cryogenic plants would extract ethane from the gas stream. This would have the impact of significantly reducing the heating value of the delivered stream. Much of the gas that enters Questar Pipeline's northern system is processed in cryogenic plants and if all these plans are in high-ethane recovery mode, the reduction in heating value of gas delivered to Questar Gas through its Northern gate stations could cause interchangeability problems. Second, Questar Gas interconnected with Kern River pipeline. The heating value of gas supplies received from Kern was usually lower than supplies received from Questar Pipeline. Second, the first commercially successful coalbed methane development started producing significant volumes in the Ferron field near Price, Utah. (Most geologists do not recognize Ferron as a separate producing basin but rather an extension of the Uinta Basin.) The gas being produced from the development had a heating value of about 980 and a CO₂ content of around 3% (the corresponding Wobbe number is 1,283). Much of the produced gas actually had CO₂ content higher than 3% but producers processed the gas to the 3% level to meet Questar Pipeline's total inert specification. This gas met all other Questar Pipeline quality specifications along with most interstate pipeline gas quality specifications as well. The Ferron production enters Questar Pipeline's system upstream of Questar Gas' Indianola and Payson gate stations. Attached is a schematic that

Exhibit No. FGT-6
Page 215 of 250

The map illustrates the natural gas pipeline network in the Western United States, specifically focusing on the area around the Green River Basin and the Uinta Basin. Key features include:

- Basins and Regions:** The map shows the Green River Basin, Uinta Basin, and Piceance Basin. It also delineates the states of Idaho, Wyoming, Utah, and Colorado.
- Gate Stations:** Several QGC (Quebec Gas Company) gate stations are marked, including Hyrum Gate, Sunset Gate, Porters Lane, Little Mountain, Payson Gate, and others.
- Production Locations:** The map indicates the location of combined production, specifically highlighting the CO2 PLT (Carbon Dioxide Processing and Liquefaction Train) in the Uinta Basin.
- Infrastructure:** The map shows various pipelines, including the Green River Basin pipeline, the Uinta Basin pipeline, and the Piceance Basin pipeline. It also depicts major roads and geographical features like Muddy Creek and the Snake River.
- Other Markers:** The map includes markers for various locations such as South Lake, Whitney Canyon, Leroy, Chall Creek, Danville, and others.

- **Established new appliance set-points** – Questar Gas established new Btu (along with Specific Gravity) set-points for different areas of its system.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 216 of 250

Questar Gas also revised the gas quality specifications in its tariff to better conform with its upstream pipeline service providers.

- Adjusted appliances in communities directly fed by the Ferron gas – Several smaller communities in the vicinity of Price, Utah directly received gas supply from coalbed sources. Questar Gas inspected and adjusted customer appliances in the impacted communities to operate at the new established set-points.
- Reduce CO₂ content of Ferron gas – Questar Gas contracted to have gas processed from a CO₂ content of 3% to a level of about 1%. Removing CO₂ increases the heating value of the gas but more importantly decreases the Specific Gravity (thus raising the Wobbe index from 1,297 to 1,334). Processing allowed Questar Gas to continue to receive the coalbed gas and still deliver interchangeable gas to customers whose appliances were adjusted for the original set-point.
- Inspect and adjust appliances in Questar Gas' system – Questar Gas has embarked on a long-term program that has customers' appliances inspected, and if necessary adjusted, to conform to the new appliance set-points. Questar Gas refers to this program as the "Green Sticker" program. Questar Gas service technicians and licensed heating, ventilation and air conditioning contractors place a green sticker on appliances that have been inspected and, if necessary, adjusted.

Since 1998, Questar Gas has been actively managing the interchangeability issues described above. At times, this has not been an easy process. Questar Gas experience has been that many areas of its operations are impacted including Gas Control, Field Operations, Legal, Regulatory, Rates and Engineering. Questar Gas' overriding focus has been to deliver a product to its customers that is safe and reliable.

D.5.2.3 Cove Point

The re-commissioning of the Cove Point LNG import facility was approved by FERC in October 2001. Following protests from Washington Gas and Light (WGL), the LDC that would receive much of its gas directly from the Cove Point facility, the maximum HHV (high heating value) for send out gas was limited at 1065 Btu/scf. An agreement was made in which WGL agreed to raise the maximum HHV of the gas leaving Cove Point to 1100 Btu/scf, as long as certain interchangeability criteria could be met. Initially the criteria included the AGA parameters for yellow tipping and lifting, combined with the Weaver parameter

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 217 of 250

for incomplete combustion. The interchangeability criteria were such that the specific limits fell within the historical distribution for pipeline gas. An independent consultant, TIAX, was asked to study a possible relaxation of those interchangeability indices. The study involved testing of domestic and commercial appliances. The testing re-confirmed that interchangeability parameters provide a good description of interchangeability. Based on the outcome of those tests TIAX proposed to change the AGA parameters for a set of Weaver indices (Yellow Tipping, Lifting and Incomplete Combustion) with the following limits²⁴:

- Weaver lift index > 1.0
- Weaver Yellow Tipping < 0.119
- Weaver Incomplete Combustion < 0.030
- HHV maximum 1100 Btu/scf
- N2 maximum 4.0%

The revised tariff for Cove Point LNG was approved by FERC in 2003.

High Btu LNG can comply with these limits with N2 injection. (Cove Point currently has one N2 injection unit of 12 mmscf capacity allowing 1.5% N2 injection at maximum send-out capacity. Installation of additional N2 injection units will be required for send-out of high btu LNG.) The maximum heating value of LNG, that the tariff allows to be brought into Cove Point is 1138 Btu/scf.

D.2.5.4 Xcel Energy

Natural gas supplies on the Colorado Front Range are blended with air for the purpose of Btu stabilization in the Xcel Energy gas delivery system. The original supply of natural gas to the Denver area contained high levels of nitrogen and was characterized by Wobbe indices of 1200-1250. As additional supplies with Wobbe indices of 1300-1350 became available from Wyoming, the issue of interchangeability became critical. In the late 1970s, the Institute of Gas Technology performed appliance testing and interchangeability calculations and determined that the new supplies could not be safely substituted for the existing base gas because of the risk of yellow tipping and incomplete combustion.²⁵ The

²⁴ Wrt following adjust gas: Adjust Gas:Methane 95.2%, Ethane 2.81%, Propane 0.44%, iButane 0.07%, n-Butane 0.08%, i-Pentane 0.06%, n-Pentane 0.05%, Nitrogen 0.53%, Carbon Dioxide 0.76%

²⁵Scott, M. I., *Interchangeability of Wyoming Natural Gas and Denver Adjustment Gas (Natural Gas)*, Final Report, IGT Project 8899. Institute of Gas Technology, February, 1978.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 218 of 250

most feasible and economic solution to address the interchangeability concern was to blend air into the new supplies to reduce the Wobbe index to the acceptable values. Air compressors have been installed at three stations supplying Denver and the surrounding areas. The quality of the gas-air mixture is controlled by measuring the oxygen content and Wobbe Index. The air added is typically 5-8% of the gas flow.

In other locations, Xcel Energy has solved interchangeability concerns with supplies by changing the burner orifices in the entire regional distribution systems. This was done in the city of Fort Collins, located 70 miles north of Denver, in 1968, to accommodate higher HHV gas and the remaining area north of Denver was also so modified in the early 1980s. In 1995 a similar effort in the mountain area near Vail, Colorado, was completed. These modifications are time-consuming and labor-intensive and are only undertaken if no other alternatives are available. The utility must enter all homes and businesses to install the new orifices in all of the appliance burners and to adjust all air shutters and manifold pressures to insure proper combustion. Follow-up inspections are necessary to verify that the work has been performed properly and to minimize the liability associated with improper adjustments.

Xcel Energy has developed curves based on the Wobbe Index to define the allowable range of gas composition in its system and to control the amount of air blended into the gas supply. A typical utilization curve is shown in Figure D.1. The curve defines the allowable deviations from the target or adjustment gas, which is defined by the composition of the historical base gas. The upper and lower lines represent differences of $\pm 4\%$ from the Wobbe Index of the target gas. Upper and lower limits are also placed on the heating value and specific gravity. Interchangeability calculations show that gases on the limit lines are interchangeable with the target gas. However, gases represented by opposite ends of the limit box may not be interchangeable with each other if using the AGA Bulletin No. 36 and/or Weaver methods.

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 219 of 250

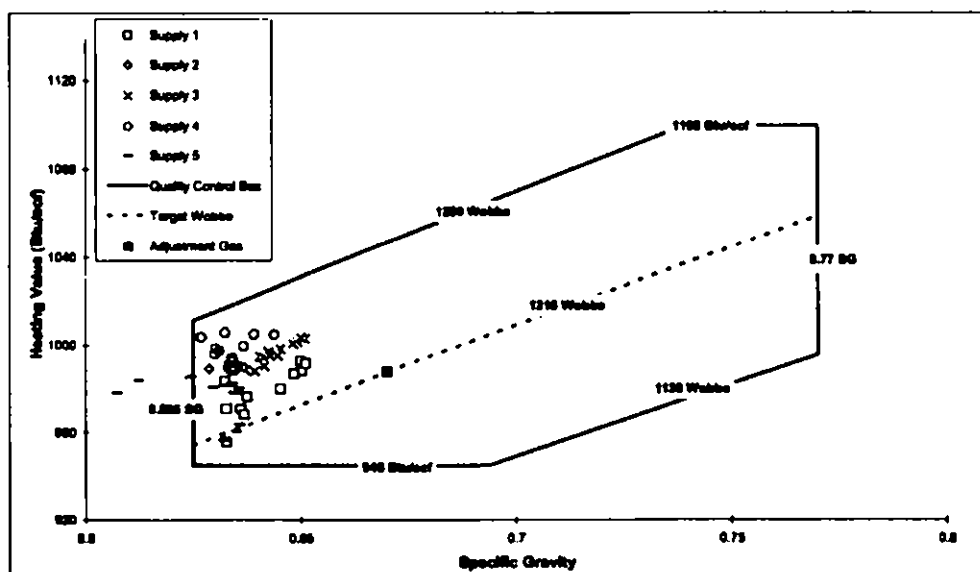


Figure D.1 Xcel Energy Utilization Curve

Interchangeability calculations are also used to establish gas quality limits during peak load. For example, the air injection capability at a particular mixing station may not be sufficient to reduce the Wobbe Index to the target value of 1210 on the coldest winter days. Therefore Short-duration limits have been developed using the interchangeability program. Maximum allowable Wobbe indices for one hour and one day are specified, respectively, by calculations of yellow tipping from AGA Bulletin No. 36 and the Incomplete combustion index from the Weaver method.

**White Paper on Natural Gas Interchangeability
And Non-Combustion End Use**

**Exhibit No. FGT-6
Page 220 of 250**

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 221 of 250

Appendix E Managing Interchangeability

Grant McCracken
Cheniere LNG

E.1 Options for Managing Interchangeability

There are three categories of options for managing interchangeability. The categories are:

- Management at the production source
- Management prior to introduction into the transmission pipeline system
- Management at the point of end use.

Each of these options is described below and placed in context with the existing infrastructure.

E.2 Management at the Production Source

Natural gas interchangeability can be managed nearby the source of production. For domestic supply, this generally entails treating and processing gas to reduce concentrations of inerts, contaminants such as corrosive compounds and hydrocarbons other than methane. Gas is treated to remove inerts and corrosive compounds such as water, hydrogen sulfide, carbon dioxide and nitrogen. Gas is processed through refrigeration, lean oil absorption, or cryogenic extraction to remove various levels of natural gas liquids (NGLs) such as ethane, propane, butanes, pentanes and hexanes plus. The level of NGL removal is dependent upon the technology, existing NGL infrastructure, economics and known gas specification requirements. Some existing and future domestic supply sources do not have access to processing plants and may not be sufficient in volume to justify the cost of compliance.

Imported LNG is processed at the production source primarily for the removal of butanes plus (C4+) level of the NGLs. This means LNG generally does not contain the heavier hydrocarbons but does contain appreciable concentrations of ethane and propane. LNG suppliers could add additional equipment to remove ethane and propane (C2/C3) from their gas stream but have historically elected to produce a higher Btu content LNG. It is important to note that Japan, Korea

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 222 of 250

and Taiwan import over 50% of globally traded LNG, and their gas specification of relatively high C2/C3 content has served as the basis of many current and future LNG supplies. Also, many LNG supply regions lack infrastructure and markets for extracted the C2/C3 product. In addition, economics favor leaving the C2/C3 fraction in the gas as transportation and sales are executed on an energy, or "dekatherm" basis. Reducing the C2/C3 fraction reduces the energy value of the LNG and reduces the economic value of each cargo.

Conceivably, LNG producers have the option of injecting inerts at the production source as well; however, the transportation economics virtually preclude this as a viable option.

E.3 Management Prior to Introduction Into the Transmission Pipeline System

Imported LNG can be processed to reduce the C2/C3 fraction at the LNG receiving terminal. LNG terminal operators or shippers contracting with terminal operators or third parties can use C2/C3 separation technology to achieve the desired interchangeability indices. The economics of this option are dependent upon the economics of of ethane and propane extraction and the proximity of local C2/C3 markets and/or available infrastructure. Given these facts, this is not an economically attractive option except in the Gulf (Texas and Louisiana) or in coastal locations where there is sufficient demand for ethane and propane. The economics in the Gulf are not what they once were as the domestic petrochemical market has shrunk in recent years. There are no NGL extraction plants associated with the three existing terminals along the East Coast. There is a small slipstream NGL extraction facility operated by a third party in the Gulf.

Conceivably, LNG terminal operators have the option of using an extracted NGL product stream as a source of energy; however, this is generally not a viable option as the volumes produced are likely to far exceed the energy consumed (check).

Injection of an inert gas is an option at the LNG terminal. There are three types of inerts that can be used:

- Nitrogen
- Air
- Flue gas.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 223 of 250

Inert gas injection reduces the heating value and increases the density of the gas, and as a consequence reducing the interchangeability indices such as the Wobbe Index. For example, injection of one (1) percent by volume of nitrogen or air reduces the Wobbe Index of natural gas by approximately 1.3 percent¹

The costs of air injection are significantly lower than N₂ injection. Air injection has been historically used for managing interchangeability. It is common in propane/air peak shaving and is also used in some regions of the US where the base natural gas supplies currently contain less inerts than the historical appliance adjustment gases.

There is one drawback with air injection, as it introduces oxygen into the natural gas; for example, injection of 3 percent air by volume results in an oxygen level to approximately 0.6 mol%. Such high oxygen levels may not be acceptable because of current tariff restrictions, concerns on pipeline integrity impact on feedstock plants and other end uses, such as peak-shaving, and underground gas storage.

Injection of flue gas is an option; however, it requires that a source of flue gas be in immediate proximity of the terminal. None of the domestic terminals use flue gas injection. In addition, the presence of oxygen in the flue gas poses the same issues described in the previous subsection.

Blending within a receiving terminal is conceivably an option. A gas meeting interchangeability specifications can be blended with a gas not meeting specifications. A terminal operator may have the option to blend two LNG sources to achieve an overall specification however, this would create operational issues and to rely on this option would reduce overall terminal capacity. As such, blending is not an option of consequence for terminal operators.

Blending applied by the pipeline operator is also a conceivable option. However, widespread use of blending is out of the direct control of the pipeline operator. The transportation of natural gas is governed by nomination of volumes and specification of receipt and delivery points as specified daily, and sometimes within a day, by shippers. Consequently, the pipeline blending that occurs is coincidental and cannot be planned to achieve a specific end point or specification.

Management of interchangeability of domestic gas is described in section 7.1, through processing prior to introducing it into the pipeline transmission system.

¹ The reduction in a parameter such as Wobbe will be greater than the simple reduction in heating value alone as the specific is also reduced.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 224 of 250

It is important to note that following implementation of FERC Order 636, significant numbers of independent producers emerged and over time have entered into contracts with pipelines to transport their gas without prior processing. This occurred as the production grew up nearby the existing pipeline infrastructure and producers determined that it was either infeasible or not economically attractive to process. The volumes of any one source tended to be small and pipelines were often able to take advantage of incidental blending to achieve a gas that was interchangeable.

In summary, when considering all of the options described above, inert injection is the most widely applicable option. C2/C3 separation may be a viable option in particular situation.

E.4. Management at the Point of End Use

Injection of an inert gas may also be an option for certain end-use customers. The management process would be similar to that described in Section E.3 *Management Prior to Introduction Into the Transmission Pipeline System* but on a smaller scale. For some large industrial natural gas customers in France, such as several glass manufacturing factories, air injection equipment has been used to stabilize the quality of their fuel gas.

There are also options that can provide greater clarity for equipment manufacturers and aid in development of North American Interchangeability Standards. The options include

- Addition of specificity to design and installation standards
- Development and implementation of a limit-gas testing regime.

Each of these is described in greater detail below.

In general, end use equipment is designed presuming that a gas stream of known composition will be the fuel source on a continual basis. As described above, the nature of the domestic natural gas has changed over time. Also, the composition of natural gas varies from region to region within the country. Manufacturers could adjust the design basis for particular end use applications, especially for low emission equipment. Also manufacturers could adjust combustion equipment at the factory and seal the equipment to ensure that it arrives for installation in a configuration consistent with the design basis.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 225 of 250

End use equipment manufacturers do provide instructions for installing and placing equipment into service. Manufacturers and even national consensus standards developing organizations could develop standards for installing and placing equipment into service that ensures that the equipment is set up and being installed consistent with the design basis. The standards could also provide guidance for installers in the event that factory settings are found to be out of spec.

Much of the end use equipment in place today is placed into service using one test gas, usually whatever the gas is at the time the testing is undertaken. National consensus standards developing organization or manufacturers working together could define a multiple test-gas testing regime. This is the approach that is used in the European Community for appliances. A benefit of this approach is that it defines the working range for end use equipment. The working range can then be factored into broader interchangeability standards.

In summary these options are of value for equipment that will be manufactured, installed and placed into operation in the future. Applying these for end use applications with large fleets in place, such as appliances will be extremely costly.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 226 of 250

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-8
Page 227 of 250

Appendix G

Derivation of Interim Guideline Calculations

Rosemarie Halchuk
Xcel Energy

Bob Wilson
Keyspan

G.1 Background

The Interim Guideline limits proposed in this document have been developed for gas supplies to those market areas without extended experience with gas supplies characterized by Wobbe numbers higher than 1,400 or heating values higher than 1,110 Btu/scf. It should be noted that the Work Group selected an operating regime based on Wobbe and heating value, but that other combinations of parameters, such as heating value and specific gravity, are possible. The combination of Wobbe and heating value was chosen because the calculation of these gas properties is straightforward using gas chromatographic data and furthermore, because these parameters are already in common use in many sectors of the U. S. gas industry. In addition, these properties are relevant to most end-use applications, including traditional and low emission combustion equipment as well as feedstock and process applications.

Development of the interim guidelines included the following steps:

- Comparison of expected LNG to historical supplies
- Estimation of a national average adjustment gas
- Traditional calculations based on interchangeability indices to develop maximum Wobbe and heating value limits
- Development of local specifications and absolute maximum limits.

The details of these steps are discussed below.

G.2 Comparison of LNG to Historical Gas Supplies

The first step in developing the Wobbe and heating value limits was to compare these parameters for expected LNG compositions to historical gas supplies in the


White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 228 of 250

US. At the time that the NGC+ Technical Work Group was formed, the 1992 GRI report on gas compositions in 26 major US cities was the most comprehensive, publicly available set of gas analysis data.¹ Current data collection efforts are underway to update and expand the database, but the results have not been finalized and are not yet published. Figure G.1 shows annual average Wobbe Numbers and heating values for the reporting city gate stations in the 1992 GRI report and for expected LNG supplies. The box in Figure G.1 represents an envelope of gas compositions that have been historically delivered to and successfully utilized by LDCs in the U. S. that participated in the study, and this envelope can be considered to establish a "gas map" of U. S. adjustment gases, i.e., gases to which appliances and other equipment have been set up and on which they have operated. It is clear from Figure G.1 that the expected LNG compositions, which include both non-blended and inert-stabilized sendouts, do not fall inside the U. S. gas map.

The Work Group believed that the gas map boundaries could be extended to higher Wobbe Numbers and heating values based on two reasons: 1) Some LDCs receive gas deliveries with Wobbes in excess of the 1372 annual average maximum on the U. S. gas map. (In fact, the maximum of the individual Wobbe numbers reported in 1992 was 1418), and 2) Most end-use equipment has historically tolerated operation at Wobbes and heating values at some level above that of the adjustment gas. The goal of the NGC+ Technical Work Group, therefore, became the development of an upper boundary to the U. S. gas map that would maximize gas supply and that would still satisfy interchangeability requirements for end use equipment.

Figure G.1. Map of US Adjustment Gases (1992 GRI Data) and Expected LNG

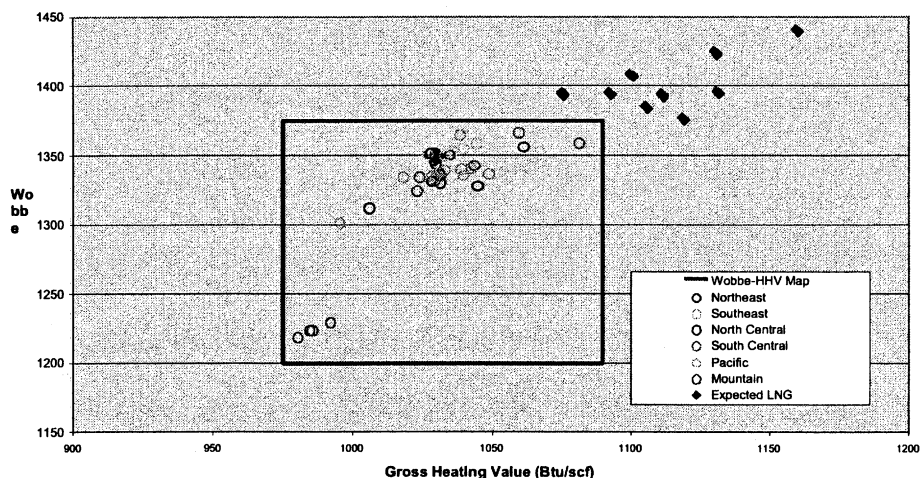

¹ "Variability of Natural Gas Composition in Select Major Metropolitan Areas of the United States," Gas Research Institute, March 1992, GRI-92/0123.

G.3 Estimation of National Average Adjustment Gas

The national average adjustment gas was estimated as the mean of the annual average composition data from the 1992 GRI composition report, excluding the data reported for one Rocky Mountain LDC (shown in the lower left of the U. S. gas map in Figure 1). The 1992 "average" gas in the remaining regions was characterized by a Wobbe of 1345 and gross heating value of 1035 Btu/scf; the average composition and corresponding properties are shown in Table G.1. The reported Rocky Mountain data were excluded because the gas supplies to the reporting LDC are different than the gases supplied to the other reporting regions. These Rocky Mountain gas supplies have historically been characterized by lower Wobbe numbers (approximately 1210) and are currently blended with air for Btu stabilization at the delivery points to the LDC. The non-blended gas supplies to the Rocky Mountain region are characterized by higher Wobbe numbers, but only the blended data were included in the 1992 GRI study.


Table G.1. 1992 GRI Mean Gas Composition	
COMPONENT	Mole %
Methane	94.246
Ethane	2.742
Propane	0.614
Butanes +	0.400
Nitrogen	1.499
Carbon Dioxide	0.500
TOTAL	100.000
Gas Properties (14.73 psia, 60°F, dry)	
Heating Value	1034.5
Specific Gravity	0.5918
Wobbe Number	1345

The "average" gas is assumed to be a reasonable estimate for an average historical adjustment gas in the U. S., because in the 1992 report, most supplies had annual average Wobbe numbers within +2/-4% of the mean Wobbe (see Figure G.2). In general, more recent gas composition data, such as those collected by the NGC+ Technical Work Group, might be more suitable to evaluate the range of substitute gases currently delivered to end markets. However it should be noted that preliminary comparison of the 1992 data with more recent data collected by the NGC+ Work Group suggests only limited overall changes over the past 10 years.

White Paper on Natural Gas Interchangeability
 And Non-Combustion End Use

Exhibit No. FGT-6
 Page 230 of 250

Figure 2. National Average Adjustment Gas

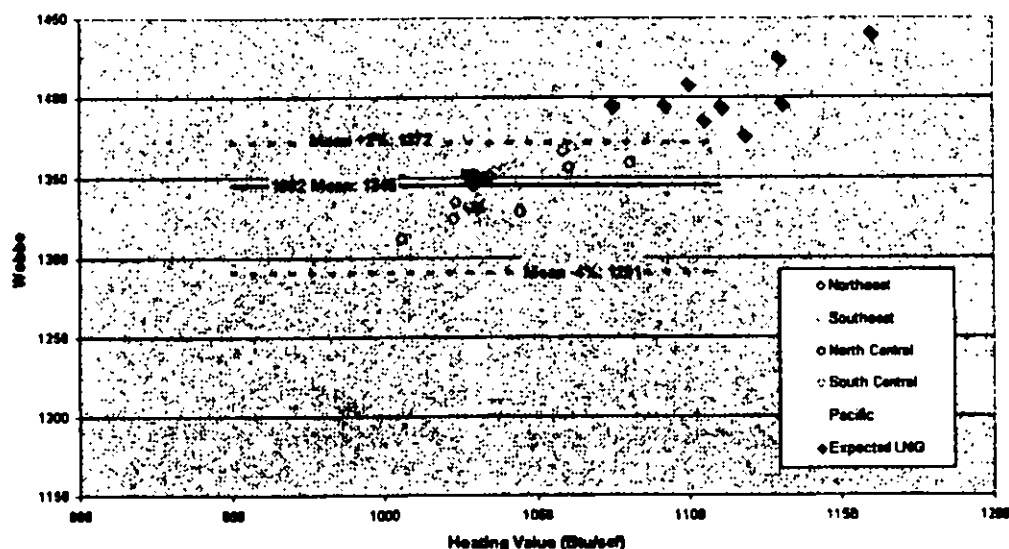

G.4 Traditional Interchangeability Calculations

There are currently no standard methods to evaluate the interchangeability of gases for all end-use applications. As discussed elsewhere in this document, the only available calculation methods to evaluate interchangeability are the various single and multiple index methods based on combustion behavior in traditional appliances. These calculation methods were chosen by the NGC+ Technical Work Group as the basis for the maximum limits for Wobbe Number and heating value. Calculations were performed with the most common interchangeability calculations in the U. S., Weaver² and AGA Bulletin #36.³ The calculations used an adjustment gas corresponding to the 1992 average U. S. gas discussed above and various substitute gases based on LNG and other high Wobbe Number mixtures.

The major results of the calculations, as shown in Figure G.3, are limit lines for both Weaver Incomplete Combustion (J_i) and AGA Bulletin #36 Yellow Tipping (I_y). The index limits for J_i and I_y were 0.86 and 0.05, respectively; these limits are the default values in the interchangeability program available from AGA.⁴ Each limit line divides the graph into areas that are interchangeable and not

² Weaver, E., *Formulas and Graphs for Representing the Interchangeability of Fuel Gases*. Journal of Research of the National Bureau of Standards, Vol. 46, No. 3, March, 1951

³ *Interchangeability of Other Fuel Gases with Natural Gas*. American Gas Association Research Bulletin No. 36, 1946.


⁴ *Interchangeability Program*, Catalog No. XH8810, 1988. American Gas Association, Arlington, VA

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 231 of 250

interchangeable with the 1345 Wobbe adjustment gas based on either incomplete combustion or yellow tipping. For example, substitute gases with Wobbe Numbers and heating values that fall above the orange Weaver incomplete combustion line are predicted to potentially result in excessive formation of carbon monoxide and are not interchangeable with the adjustment gas; gases corresponding to points below the line should be interchangeable with respect to incomplete combustion.

Figure 3. Limit Lines for National Average Adjustment Gas

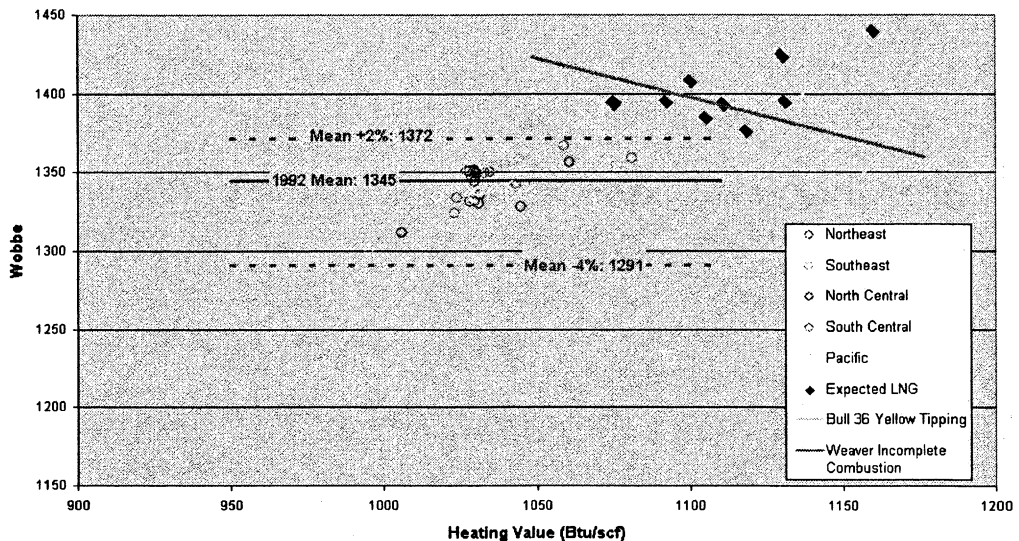

The maximum limits in the interim guidelines were selected as a Wobbe Number of 1,400 and heating value of 1,110 Btu/scf (the blue square and line in Figure G.4). Note that the maximum Wobbe Number limit of 1400 is approximately 4% higher than the adjustment Wobbe Number of 1345. This point was chosen for the following reasons:

- 1) It is close to the Weaver incomplete combustion line, and this selection implicitly prevents exceeding the generally accepted Weaver Incomplete Combustion Index limit. Thus, the safety of substitute gases is reasonably assured, at least for traditional appliances.
- 2) The 1992 GRI gas composition data show that gases with this Wobbe Number and heating value had been delivered in the past, and more recent but unpublished data indicate the same. Thus, there has been some experience with gases approaching the specified limits.
- 3) Five out of nine expected LNG or nitrogen-stabilized LNG compositions would satisfy or nearly satisfy the maximum limits. Thus, the guidelines will not unduly restrict new gas supplies.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 232 of 250

Figure 4. Maximum Limits for Interim Guidelines

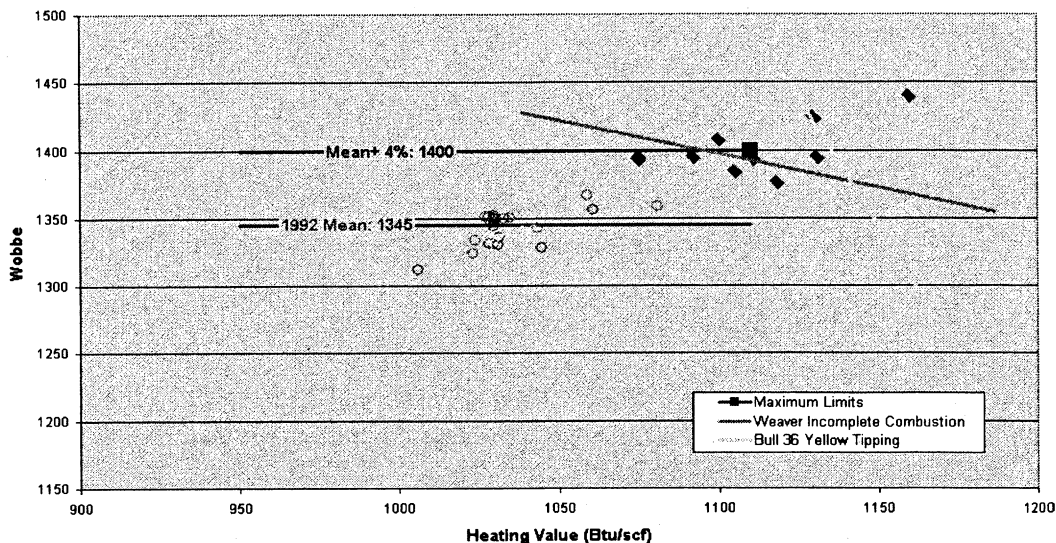


Figure G.4 illustrates that the upper Wobbe Number and heating value limits can be considered an extension of the upper boundary for the U. S. gas map. This extension for the interim guidelines is based on "second-order" gas combustion phenomena represented by the Weaver Incomplete Combustion Index, which is important for traditional gas appliances but is not directly addressed by Wobbe Index limits. While this approach is an imperfect application of the Weaver Incomplete Combustion Index and criterion and is based only on traditional appliances, it introduces conservatism into the guidelines for an important interchangeability parameter and safety consideration, excessive carbon monoxide generation. As indicated by the yellow line on Figure G.4, further extension of the upper limits on Wobbe Number and heating value could risk improper combustion phenomena, such as yellow tipping and soot formation, that are associated with appliance overfiring, and in the absence of extensive recent appliance data, the Work Group found this risk to be unacceptable at the current time.

Complete management of gas interchangeability requires specification of both minimum and maximum limits for Wobbe numbers, but the Work Group chose to restrict the Interim Guidelines to specification of upper limits. The issue of supplies with increasing Wobbe numbers is currently more widespread than the issue of supplies with decreasing Wobbe numbers. Furthermore, a number of utilities with low Wobbe supplies have implemented interchangeability management practices in the past, while many utilities already receiving or anticipating receipts of higher Wobbe number supplies have little to no

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 233 of 250

experience in interchangeability management. The Work Group's focus has therefore been evaluation of maximum Wobbe limits. The Work Group recognized the equal importance of a minimum Wobbe limit and the need for inclusion in the proposed research program.

G.5 Development of Local Specification and Absolute Limits

Figure G.1 shows that not all U. S. gases were characterized by annual average Wobbe Numbers of 1345, but interchangeability guidelines must be based on the actual historical supplies or established target gas in a given service territory. Based on the interchangeability calculations for the national average adjustment gas, the Work Group selected the same relative limit for the upper range of variability, namely, 4% greater than the actual historical or target Wobbe Number. Interchangeability calculations were not developed for Wobbe Numbers below the target, but the Work Group assumed that a symmetrical lower limit of - 4% was justifiable based on available historical gas composition data. In addition, this lower limit is conservative for appliances adjusted in the middle of the specified range; based on the experience of several Work Group members, traditional interchange calculations would not predict flame stability problems until the Wobbe was significantly lower. To summarize, the Interim Guidelines specify:

A range of plus and minus 4% Wobbe Number Variation
from Local Historical Average Gas or, alternatively,
Established Adjustment or Target Gas for the service
territory.

For service territories with no demonstrated experience (including historical supplies and/or testing), the limits of 1,400 Wobbe Number and 1,110 Btu/scf were selected as reasonable absolute maxima.

It is important to note that both the relative and absolute limiting values in the Interim Guidelines simply serve to establish boundaries for market areas that have received historical gas supplies with gas quality close to the 1992 reported national mean and that have experienced successful end use with these gas supplies. Also, the limits are based on traditional interchangeability calculations and so may not be applicable to new burner designs in appliances or to other applications such as industrial burners, combustion turbines, gas engines and non-combustion processes. Nonetheless, these boundaries are based on the major predictive tools available in the U. S., and they should be applicable until additional research and/or experience has clearly demonstrated that end users in the affected market areas are not negatively impacted by supplies above the caps.

200506305008 Received FERC OSEC 06/30/2005 10:43:00 AM Docket# PL04-3-000

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 234 of 250

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 235 of 250

Appendix H Research Recommendations

Bob Wilson, Keyspan
Rosemarie Halchuk, Xcel Energy
David Rue, GTI
Ted Williams, AGA

Gas interchangeability research issues, needs, and recommendations were identified and developed by the Research Subgroup of the Gas Interchangeability Work Group, which included representatives of all major stakeholders active in the Work Group. The Research Subgroup considered major end user segments for which gas interchangeability data and technical analysis are currently incomplete. The following discussion of four major end user segments represents a concise synopsis of research issues, needs, and recommendations identified by the subgroup. The four segments include:

- Appliances
- Turbines, Microturbines, and Power Boilers
- Industrial and Commercial Burners
- Stationary and Vehicle Engines.

End user segments represent major combustion applications for which gas interchangeability research is needed. Non-combustion (e.g., feedstock) applications of natural gas and infrastructure issues are not covered by this summary. However, specific research needs for these topic areas were identified in both this appendix and in the summary matrix (Table 1 of the White Paper).

H.1 Appliances

H.1.1 Background

Gas interchangeability research on residential and commercial appliances has been conducted for decades to address changes in gas supply characteristics. Thorough accounts of early interchangeability research on appliances are

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 236 of 250

provided by AGA^{H1} and Weaver.^{H2} In the 1970s and 1980s, a number of studies on appliances were performed in conjunction primarily with LNG import terminal projects in local or regional settings. More recently, studies by GTI,^{H3} TIAX, and Sempra Energy have separately addressed traditional and some modern appliance designs. Previous studies have also focused on the interchangeability of varying domestic base load supplies^{H4,H5} and peak-shaving supplies.^{H6} Table H.1 lists some of the studies covering a variety of gas interchangeability studies with focus upon appliance-related studies. Most, but not all, of the listed studies are publicly available.

Table H.1 Summary of Interchangeability Studies

American Gas Association, "Interchangeability, Chapter 2, Utilization: Book U-1," Residential/Commercial, Gas Engineering and Operations Series, Arlington VA, 1994.
Benson C.E., C.J. Orcheski, "Introduction of Vaporized Algerian LNG Into the COM/Gas Distribution System," Arthur D. Little, Commonwealth Gas Company, Cambridge MA, 1989,
Committee on Domestic Gas Research, "Gas Burner Utilization All Air for Combustion as Primary Air," Research Bulletin No. 20, American Gas Association Testing Laboratories, Cleveland OH, February 1944.
Committee on Domestic Gas Research, "Non-Aerated Burners," Research Bulletin No. 32, American Gas Association Testing Laboratories, , Cleveland OH, September 1944.
Committee on Mixed Gas Research, "Interchangeability of Other Fuel Gases with Natural Gases," Research Bulletin 36, American Gas Association Laboratories, Cleveland OH, February 1946.
Coward H.F., H.P. Greenwald, "Propagation of Flame in Mixtures of Natural Gas and Air," Bureau of Mines, Department of Commerce, Washington DC, 1928.
Eiseman J.H., R.A. Smith, C.J. Merritt, "The Effect of Altitude on the Limits of Safe Operation of Gas Appliances," Bureau of Standards Journal of Research, American Chemical Society, Washington DC, March 1933.
Estrada Jr. A.B., "The Effect of Gas Composition on Residential Appliance Burner Performance," Symposium Paper, Natural Gas Quality & Energy Measurement, Institute of Gas Technology, Clearwater FL, February 5-7, 1996.

^{H1} "Utilization: Book U-1, Residential/Commercial, Gas Engineering and Operations Series, American Gas Association, 1994.

^{H2} Weaver, Elmer R. "Formulas and Graphs of Representing the Interchangeability of Fuel Gases," Journal of Research of the National Bureau of Standards, Vol. 46, No. 3, March 1951.

^{H3} Johnson, Frank and Rue, David M., *Gas Interchangeability Tests—Evaluating the Range of Interchangeability of Vaporized LNG and Natural Gas*, GRI-03/0159, Gas Research Institute, Des Plaines IL, April 2003.

^{H4} Scott, M. I., *Interchangeability of Wyoming Natural Gas and Denver Adjustment Gas (Natural Gas)*, Final Report, IGT Project 8899. Institute of Gas Technology, February, 1978.

^{H5} Estrada, A.B. Jr., *The Effect of Gas Composition on Residential Appliance Burner Performance*. Institute of Gas Technology, Gas Quality and Energy Measurement Symposium, Clearwater FL, February, 1995.

^{H6} Kelton K., *Appliance Performance and Changes in Gas Composition*, American Gas Association, Distribution Conference, Denver CO, May, 1978.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 237 of 250

Gilbert T.M., C.W. Warner, "Why---and Where? Natural Gas Stabilization," Gas Age, January 27, 1955.

Halchuk R.A., "Btu Stabilization: To Air Is Natural," Symposium Paper, Natural Gas Quality & Energy Measurement, Institute of Gas Technology, Clearwater FL, February 1996.

Halchuk R.A., "Gas Quality Specification and Interchangeability for End Use Applications," Conference Paper, Operations Conference, American Gas Association, Dallas TX, May 2001.

Hanley W.E., "Gas Interchangeability: A P.C. Template," Symposium Paper, Personal Computer Applications Symposium, Institute of Gas Technology, August 2, 1988.

Harsha P.T., R.B. Edelman, D.H. France, "Catalogue of Existing Interchangeability Prediction Methods," GRI-80/0021, Gas Research Institute, Chicago IL, 1980.

Harsha P.T., R.B. Edelman, D.H. France, "Efficient Utilization of Alternative Fuels - Development of Models for the Prediction of Interchangeability, Design, and Performance of Gas Burner/Combustor Systems," GRI-79/0034, Gas Research Institute, Chicago IL, April 15, 1980.

Harsha P.T., R.B. Edelman, R.J. Jensen, M.M. Sindr, T.S. Wang, "Performance Modeling of Advanced Gas Burner Systems," GRI-83/0072, Gas Research Institute, Chicago IL, July 1983.

Hoglund P.A., "International Standards: Let's Not Miss the Boat," Gas Industries, October 1989.

Johnson, Frank, Rue, David M., "Gas Interchangeability Tests--Evaluating the Range of Interchangeability of Vaporized LNG and Natural Gas," GRI-03/0159, Gas Research Institute, Des Plaines IL, April 2003.

Johnson P.C., "Interchangeability of Regasified LNG," Conference Paper, Distribution/Transmission Conference, American Gas Association, Nashville TN, April 28-May 1, 1991.

Kelton K., "Interchangeability of Refinery Gas and Natural Gas," PSE&G, , October 26, 1971.

Kelton K., "Appliance Performance and Changes in Gas Composition," Conference Paper, American Gas Association Distribution Conference, Denver CO, May 1978.

Llemsider T.J., "Gas Interchangeability," Gas Operations School, New England Gas Association, Newark NJ, June 14, 1991.

Long G., "Quality Requirements for Substitute Gas," A.G.A. Monthly, June 1972.

Loria R, D. DeWerth, "Improvements in Appliance Efficiency, Task 1 Upgrading Seasonal Efficiency of Gas-Fired Heating Appliance," GRI-80/0043, American Gas Association Laboratories, Gas Research Institute, Cleveland OH, June 1980.

McKenna, Jon T. Jr. Buckley, Charles P., "Utilization of High-Btu Imported LNG - A Distributor's Viewpoint," Conference Paper (72-D-62), Boston Gas Company, AGA, Boston, Ma, April 1972.

Rana, H. S., Johnston, D. S., "An Empirical Approach to Evaluating Gas Interchangeability," Operations Conference Paper 03-OP-41, AGA Operations Conference, Orlando, FL, May 2003.

Rijnaarts J.A., "Combustion Characteristics of High-Density Natural Gas of The L Group," Conference Paper, International Gas Research Conference, 1986.

Roszbach E.O., S.I. Hyman, "Interchangeability: What It Means," AGA Catalog No. XL0884, American Gas Association, , Washington DC, May 22, 1978.

Seubert R.R., "Gas Interchangeability," Paper, Gas Operations School, New England Gas Association, Waltham MA, June 15, 1989.

Scott M.I., "Interchangeability of Wyoming Natural Gas and Denver Adjustment Gas (Natural Gas)," IGT

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 238 of 250

Project 8899, Institute of Gas Technology, Colorado Interstate Gas Company, Colorado Springs CO, February 1978.

Steinmetz G.F., "Quality Specification of Pipeline Natural Gas: Review of the US Situation," Conference Paper, Congress of Gas Quality, Groningen The Netherlands, August 1986.

Steinmetz G.F., "The Case for Compatible Standards Between Gas Appliance Performance and Natural Gas Quality," Conference Paper, Spring National Meeting, American Institute of Chemical Engineers, New Orleans LA, March 6-10, 1988.

Steinmetz G.F., "What is Natural Gas? - A New Approach to an Industry-Wide Problem," G/A/S Newsletter, September 1988.

Task Force on Operating Flexibility for Appliances Using Natural Gas, American National Standards Committee Z21, "Minutes of Meeting," Cleveland, OH, February 21-22, 1984.

Weaver E.R., "Formulas and Graphs for Representing the Interchangeability of Fuel Gases," Journal of Research of the National Bureau of Standards, Vol. 46, No. 3, March 1951.

Working Group on Interaction of Gases, "Problems Arising from the Interchangeability of Second Family Gases," International Gas Union, 1983.

H.1.2 Research Issues and Needs

A new phase of interchangeability research is currently necessary for several reasons including the development of new appliance designs and technology, consideration of traditional safety and performance criteria, and evolution of new performance criteria (i.e., efficiency requirements and ambient air emissions limits). The existing database on interchangeability relates to most of the "legacy" appliances in the currently installed stock, but the stock is changing in response to the new criteria on efficiency and emissions. Considerable discussion of "the most sensitive appliances" and whether new designs are more or less tolerant of variations in gas composition than "legacy" appliances has neither resolved these issues nor even established reliable trends for because there is currently no comprehensive or publicly available database on the sensitivity of combustion performance in new appliance technology to gas compositional changes.

H.1.2.1 Review of Existing Interchangeability Project Results. Detailed review of existing, published data is required to evaluate the relevance, usefulness, and validity of these studies in formulating more general conclusions on gas interchangeability for today's market. If, for example, a published study that derived guidance on interchangeability indices was based on appliances that no longer exist in the current stock of appliances, the study data and conclusions may not be as useful for general conclusions on interchangeability in its contemporary sense. Also, test methods must be reviewed, and, where possible, experimental error and judgment must be evaluated to determine the reliability of study data and conclusions.

H.1.2.2 Identify New Appliance Types. Appliances not represented in the interchangeability studies literature must be identified and evaluated for potential future testing. Common features of appliance types need to be identified and categorized to streamline future testing and to avoid over-sampling. Categorization may be based, for example, on burner type, heat exchanger design, and/or combustion air supply, although it is uncertain at this time whether such gross design similarities in new appliances can fully capture interchangeability performance.

H.1.2.3 Standardize Results from Previous Interchangeability Studies. Interchangeability studies have been undertaken for different purposes, from testing of new gases introduced in a service territory to derivation of new interchangeability indices. Test results from these studies, however, are compiled in a generally similar way, describing flame performance and emissions for specific tests. Results from this extensive database need to be compiled in a standardized manner so that they are useable in arriving at general conclusions across all the studies. In addition, calculation of all relevant indices should be conducted on these data, regardless of whether the data were originally used in conjunction with the indices or not.

H.1.2.4 Identify Common Conclusions. Comparison of the results of previous interchangeability studies is needed to assess whether common conclusions on interchangeability indices and metrics can be applied across the entire range of appliances and equipment tested. Practical and valid guidance on supply requirements can only be achieved by general conclusions on interchangeability measures that assure acceptable performance and safety in appliances.

H.1.2.5 Assemble Previous Data for Interchangeability Parameters. Behind many of the published studies are data reports and other records that

support interchangeability indices and parameters for those indices. Major data sources, particularly those supporting specific "default" numerical parameters for indices, need to be assembled and reviewed for validity in describing acceptable performance of appliances and providing general guidance on gas interchangeability.

H.1.2.6 Measure Carbon Monoxide (CO) Production. CO production, a major and traditionally used criterion for acceptable appliance performance, must be measured, particularly for new appliance designs and baselines of performance (such as ANSI Z21/83 performance requirements) must be evaluated and applied to appliance test data to determine acceptability.

H.1.2.7 Evaluate Current Standards for Appliance Testing and Emissions Limits. Current design certification testing of appliances under ANSI Z21/83 does not test for limits of performance in response to changes in supply composition. However, certification testing does incorporate a number of test gases, although not all test gases are included in full performance testing. The standards must be evaluated to determine whether the current test gases and performance tests can be revised to directly address interchangeability issues or whether new testing approaches, including limit gas testing that was considered in the 1980s, are needed to assess interchangeability.

H.1.2.8 Conduct Long-Term Testing of Sensitive Appliances. Appliances identified as "sensitive" in terms of emissions (such as those close to design certification limits), high thermal excursions and/or other critical performance must be studied in long term testing that spans and exceeds the projected lifetimes. Emissions performance and durability can be affected by age, and by high heat environments can cause aging acceleration. It must be determined whether gas composition changes can result in critical rates of higher heat generation. Design certification may be a poor predictor of these changes over time and may not identify performance changes that may exceed design certification or changes in the life of critical components such as heat exchangers or controls.

H.1.2.9 Group Appliances by Statistically Relevant Categories by Range of Type and Ages. Statistical descriptions of the installed appliance stock and shipments of new appliances should be used with categorizations of appliance types and designs on a national and, if sufficient detail is available, local basis. This characterization will allow assessment of the potential impacts of future candidate interchangeability limits that are different than the Interim Guidelines. This grouping will allow reasonable description of the impacts of revised gas interchangeability proposals on the number and types of appliances affected, the nature of the specific impacts, and ultimately, the societal risk of introducing broader interchangeability tolerances.

H.1.2.10 Statistically Evaluate Appliance "Maladjustment" Over Time.

In this context, maladjustment refers to appliances that were improperly adjusted - or not at all adjusted - at the time of installation and/or to appliances whose adjustment may have changed over time due to lack of periodic maintenance. The magnitude and frequency of maladjustment must be determined in order to identify vulnerabilities of end use consumers to emissions exceeding design or target limits and to potential economic losses from premature failure. The regional characteristics for maladjustment must also be evaluated to determine if maladjustment is more critical in some areas, such as those located at high altitudes, for example. If the research determines that the magnitude and frequency of maladjusted appliances are significant, consideration of maladjusted appliances may limit the ranges for acceptable interchangeability indices, and more conservative parameters may be required to reduce the prospect of malfunctions that create safety hazards. On the other hand, if the research determines that magnitude and frequency of maladjustment is not critical, then less conservative parameters may be acceptable. However, it is important to note that at the current time, the societal risk of such malfunctions cannot be adequately assessed because the magnitude and frequency of maladjustment is generally unknown.

H.1.2.11 Determine if Limit Gas Testing Would Enhance Equipment Flexibility With Varying Fuel Compositions. Limit gas testing on appliances was considered for incorporation in the Z21/83 design certification tests in the U.S. in the early 1980s.¹⁴⁹ However, as concern over strong variations in U. S. gas supply abated later in the decade when natural gas supply in most areas of the U. S. stabilized, the additional expense of such testing was seen as unjustified. On the other hand, Europe proceeded with limit gas testing in individual countries, and ultimately, the European Union facilitated market integration by basing acceptability of appliances on diverse national supplies. Discussion of limit gas testing in the U. S. design certification tests has been revived as a means to assess gas interchangeability from the perspective of the changing gas supply. The additional testing costs must be evaluated against potential elimination of current tests (e.g., current tests on additional gases other than Test Gas A) and resulting efficiencies gained in the certification procedures. It is important to note that limit gas testing in design certification would only address interchangeability for new appliances, not for appliances currently in the installed stock.

¹⁴⁹ Steinmetz G.F., *The Case for Compatible Standards Between Gas Appliance Performance and Natural Gas Quality*, American Institute of Chemical Engineers, Spring National Meeting, New Orleans LA, March, 1988.

H.2 Turbines, Microturbines & Power Boilers

Significant data gaps and conflicting information exist from OEM's regarding fuel composition variability relating to performance, combustion stability and emissions from modern low emission gas turbines. Actual test data considering fuel composition variability is not publicly available. Considering this end use category is one of the fastest growing areas of gas consumption and the potential consequences associated with equipment outages makes this research component a priority.

H.2.1 Background

Although modern gas turbines can operate on a wide variety of different gaseous fuels, dry low emission (DLE) turbines have very complicated combustion systems whose operation depends on a relatively consistent fuel composition to maintain acceptable hardware life and to ensure pollutant emission guarantees are met. Significant changes in fuel composition over a short period of time beyond which the equipment was originally designed and tuned to receive may have substantial detrimental effect on the operation of the unit. The degree of change that is significant is dependent upon which component of the gas is changing, with some deleterious effects occurring with relatively small changes while other changes in composition can be much larger with minimal impact.

As a result, additional research is needed to understand the magnitude of compositional changes that impact turbine operations and emissions coupled with the time rate of change impacts on operability of these machines. While the White Paper suggests that a Wobbe variation of $\pm 4\%$ of the historical adjustment gas will meet the needs of turbine operators, some OEM's have expressed some reservations to these limits as being too broad to control emissions and meet current fuel specification guarantees.

H.2.2 Research Issues and Needs

An industry collaborative effort is necessary for this research to be effective. OEM's, gas suppliers and equipment owner / operators all need to come to consensus as to how testing should proceed achieve the maximum benefit from the results. In summary, the following outlines the test program:

- Define and catalog the current range of gases and equipment configurations that successfully exist today.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 243 of 250

- Define reasonable variations in fuel compositions due to the addition of non-traditional supplies (LNG imports, unprocessed domestic supplies, coal bed methane etc).
- Identify "design" vs "as tuned" relationships for installed equipment.
- Identify current systems response to increases in hydrocarbon constituents beyond which the equipment was originally designed to handle. Monitoring to include emissions, performance and combustor dynamics. This testing should be conducted at base load with particular attention to start up cycles.
- Identify current systems response to decreases in hydrocarbon constituents associated with Btu stabilization (addition of inerts) with the same tests as stated above.
- Repeat the abovementioned testing with units equipped with "active tuning" hardware to understand the response characteristics.
- Repeat testing as stated above under varying load conditions.
- Repeat testing for various combustor design configurations including a specific focus on High Pressure Ratio gas turbines (>19:1).

H.2.2.1 Identify All Major Types and Manufacturers

Equipment manufacturers should be identified along with specific equipment information including the types of combustor, combustion controls, secondary emission controls, fuel conditioning equipment, fuel gas monitoring equipment and instrumentation.

H.2.2.2 Collect Manufacturer Data

This process involves the collection of all available OEM test data that can be made publicly available to provide a basis for developing the additional test methods and protocols necessary to fill the data gaps.

H.2.2.3 Collect End User Data

This process involves the collection of all available end user data to document practical operating experience that can be made publicly available to provide a

basis for developing the additional test methods and protocols necessary to fill the data gaps.

H.2.2.4 Develop Testing Methods and Protocols

Standard test methods must be developed to include laboratory bench testing coupled with full scale testing at existing turbine installations based on information gathered in steps 2.2.2 and 2.2.3. A defined range of acceptability must also be established during test method development.

H.2.2.5 Evaluate Specific Issues of Heavy Hydrocarbons (C₄+))

Turbine emissions must be evaluated considering specific hydrocarbon constituents including butanes +. Several pieces of conflicting currently exist around this constituent parameter that must be resolved.

H.2.2.6 Evaluate Potential for Using Methane Number as an Interchangeability Index

Interchangeability and fundamental combustion parameter relationships need to be evaluated during the testing and experimental design process to determine the interrelationships (if any) of these parameters in predicting fuel gas impacts on operability and performance.

H.2.2.7 Assess Combustion Fundamentals Associated with Stability and Emissions

Fundamental combustion theory suggests that emissions and combustion stability issues are potential consequences of varying fuel compositions over short periods of time. These "swings" in composition and the resultant impacts such as pressure pulsations, flame stability and emission impacts need to be confirmed in order to encourage greater fuel composition flexibility into the combustor design process.

H.3 Industrial and Commercial Burners

Industrial and commercial burners include burners used to provide heat and appropriate conditions for the conversion of materials into desired products. Under most circumstances, these burners are operated in conjunction with

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 245 of 250

combustion control systems. Appliance burners often operate only intermittently, but industrial and commercial burners can operate most of the time or continuously for years. Firing capacities of individual industrial and commercial burners are usually much larger than appliance burners capacities, but there are exceptions where industrial processes use small burners.

H.3.1 Background

Industrial burners vary tremendously in firing capacity, flame speed, method of mixing, flame shape, flame temperature, and other characteristics. Rather than classify the wide range of industrial burners by end use, they are best categorized by burner type. All manufacturers design and warrant burners and their performance, but no standard testing protocols are universally practiced or accepted to determine fuel impacts on burners or burners with their control systems. Because performance standards are high, burners have become highly engineered. This has made their performance more sensitive to small input changes. Efficiency, component life, and emissions are highly dependent on precise control of all aspects of the combustion process. The available information on changes in efficiency, performance, and emissions is very limited and needs to be expanded for sensitive classes of industrial burners. The information currently available is provided by equipment manufacturers which makes the data spotty and does not provide independent validation of the data.

H.3.2 Research Issues and Needs

H.3.2.1 Classify Burners and Combustion Systems by Type

The wide range of industrial and commercial burners must first be classified by burner type (nozzle mixed, high momentum, oxy-gas, etc.). This list must include the principal characteristics of each burner type and the manufacturers producing that burner type. Preliminary review has found that most industrial burners can be classified into 20 to 30 major classes of burners. The list of burner types must also include a ranking that estimates the level of sensitivity of each burner type to fuel gas changes. This ranking is not meant to be exclusionary but to be a guide for testing. The ranking may help to reduce the number of burner types that need to be tested to evaluate the impacts of fuel interchangeability on industrial burners.

H.3.2.2 Differentiate New Burner Types Under Development from Conventional Operating Burners

The listing of burner types must include new high-efficiency and low-emission burners under development or just entering the market. Experimental burners

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 246 of 250

do not need to be included until they reach development stage. The performance of these types of burners is especially sensitive to fuel gas changes because they can be tuned to narrow fuel gas heating value and composition ranges and because rapid swings in fuel gas can affect performance.

H.3.3 Development of Methods to Characterize Industrial Burners

H.3.3.1 Collect Data on Performance and Develop Consistent Basis for Interpretation

Burner, control system, and equipment operators must be contacted to collect available performance data on the most sensitive types of industrial burners. The range of control options practiced with each sensitive burner type must also be identified. This information will be anecdotal and isolated in most cases but will provide needed background for the verified tested. needed for interchangeability.

H.3.3.2 Identify Test Methods by Type

Several types of tests must be conducted with industrial burners and control systems. These include performance, operation, and emissions. Performance tests will evaluate the impacts of fuel changes on the control components, on equipment operation, on safety, on air to fuel ratio limits, etc. Operations tests will monitor characteristics such as flame length, flame temperature, flame shape, and other operations properties. Emissions tests will collect data on emissions changes relative to fuel gas changes.

H.3.3.3 Develop Test Methods and Protocols

A series of performance, operations, and emissions test protocols must be developed. These test methods must be well documented and repeatable by any testing facility. There are many ways, for example, to measure flame length. The objective must be to choose a reliable method that can be quantifiably employed by any testing group so that verifiable data can be collected.

H.3.4 Industrial Burner Testing

H.3.4.1 Test Set-Up for Industrial Burners

Industrial burners and control systems are employed on small to very large processes in practice. Therefore, consideration must be given to test facility

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 247 of 250

arrangements that accommodate this wide size range, the range of temperatures and firing rates used, and many other variations. No single laboratory arrangement can approximate all industrial applications. Therefore, a group of defined testing conditions must be defined that allow repeatable testing of industrial burners and control systems at conditions that come as close as possible to industrial practice.

H.3.4.2 Industrial Burner Tests

Tests must be conducted with 1) the industrial burners and control systems identified as most sensitive, 2) by the testing protocols developed, and 3) in facilities specified for testing to ensure repeatable results. Testing will include variations in fuel composition and heating value, study of the impact of rapid fuel gas switching, assessment of changes of the firing range of the burner, etc. In all cases, the burners will be tested in combination with the common control system (or systems) used in industrial practice.

H.3.5 Analysis of Industrial Burner Test Results

Testing results, literature data, and information from equipment manufacturers and operators must be analyzed to determine fuel interchangeability relative to industrial and commercial burners. Analysis may reveal that the indices used for appliance burners are inappropriate for industrial burners. In this situation, new indices need to be developed. The objectives of the analysis are to 1) determine which burner types are most sensitive to fuel gas changes, 2) determine ranges of gas property changes that are acceptable for classes of industrial burners and can then serve as interchangeable, and 3) provide guidance on indices appropriate for determination of fuel gas interchangeability for industrial burners.

H.4 Stationary and Vehicle Engines

Reciprocating engines continue to be of great importance to the gas industry and end users generally in a wide variety of stationary and vehicular applications. Many of these applications are driven by emissions regulations, but the applications themselves are under increasing pressure to demonstrate acceptable emissions performance.

H.4.1 Background

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 248 of 250

Gas compositional issues emerged early in the advanced development of gas engines due to the need to control detonation or "knock" in engine cylinders, which can lead to early engine failure as well as operational and emissions performance problems. Development of the American Society of Automotive Engineers (ASAE) Standard J-1616 and the National Fire Protection Association (NFPA) Standard 54 set some of first fuel quality specifications in the U. S. based on controlling combustion behavior, albeit under compression conditions. Continuing activity, led by the State of California and stakeholders in California, is focused on refining requirements and metrics for gas specifications in engines. Appendix C.4 has greater detail on past and current activity.

H.4.2 Research Issues and Needs

While a great deal of information has been developed on gas reciprocating engines in the last two decades, much of this information is diffuse and requires greater uniformity and availability to support fuel quality specifications and emissions performance. In addition, technical consensus is needed on gas parameters for fuel and emissions performance, such as uniformity of the methane number calculation of gases, so that more efficient parameters for interchangeability can be utilized. The following are several specific near term needs.

H.4.2.1 Survey Manufacturers for Performance Data by Equipment Model

Manufacturers continue to have data and access to data gathering for key engine models, both for stationary and vehicular applications. Current information on equipment models is incomplete and, in some respects, out of date, especially for models using the latest closed-loop controls and emissions. Data collection, while protecting commercial confidentiality, must be more widely available, especially for performance and emissions using limit gases represent potential new supply sources.

H.4.2.2 Review Operations and Emissions Measurements and Requirements

Operations requirements have changed over recent years and government support has declined and greater cost effectiveness has been required for gas engines, particularly in vehicular applications. Basic performance requirements of gas engines, along with requirements for engines using competing fuels, need to be updated to identify critical applications that might have particular sensitivity

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 249 of 250

to gas compositional requirements. A similar focus is needed for emissions performance. In addition, the role and trends in emissions requirements both driving the focus on gas engines and regulating these engines need to be updated in light of potential changes in supply.

H.4.2.3 Collect Manufacturer Data

Data from manufacturers on performance and emissions is needed to better represent the current state of the art in engines and controls and to evaluate sensitivities to changes in gas composition. Initial gathering of manufacturer data is expected to require augmentation with manufacturer testing for limit gas performance. Testing protocols, administered by the manufacturers, need to be developed in conjunction with the manufacturers and efficiently be applied to a wide range of engine models while maintaining general consistency across the industry.

H.4.2.4 Collect Published Data and End User Data

End users, including pipeline operators with continuous monitoring capability and vehicle fleet managers required to meet local requirements, can provide key information on performance and, in particular, emissions from gas engines. In some cases, these end users have instrumentation that can be used to collect gas compositional information that can be associated with performance and emissions. However, instrumentation available suggests that monitoring will produce data supporting only a limited number of parameters. Published data on performance and emissions is available from a variety of governmental and non-governmental sources, but this data is dispersed and needs to be reviewed for applicability to interchangeability.

White Paper on Natural Gas Interchangeability
And Non-Combustion End Use

Exhibit No. FGT-6
Page 250 of 250